

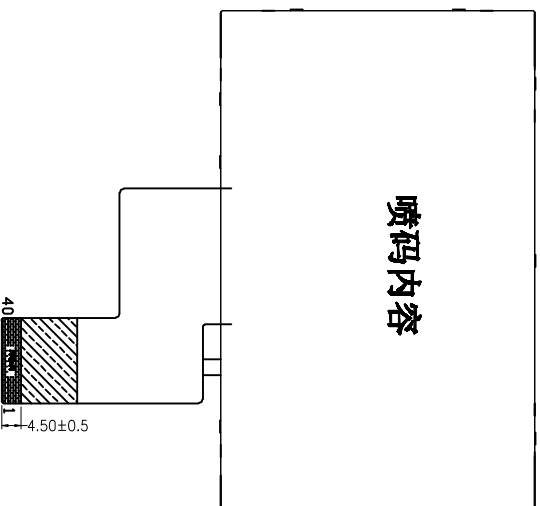


标注 * 请重点确认!

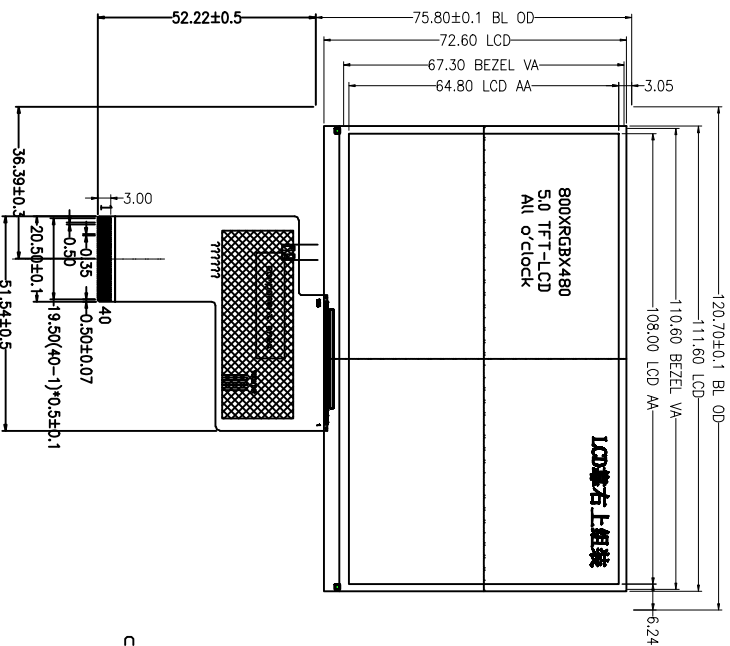

Brightness: 450cd/m² MIN.

Backlight LED Circuit
If=60mA, Vf=18.0V(TYP)



Display Type	TFT
Main driver IC	NORMAL BLACK TRANSMISSIVE ST7262
Operation Temperature	-20°C ~ 70°C
Storage Temperature	-30°C ~ 80°C
Connector	
Interface	
Backlight Color	WHITE
Backlight Forward Voltage	Vf=18.0V(TYP)(If=60mA)
CUSTOMER PROJECT NO.	

TITLE	MODULE SPEC.
DRAWN	
CHECKED	
APPROVED	
CUSTOMER'S APPROVAL	

FIRST ISSUE	DATE	20190428
AMENDMENT	SIGN	WU

PROJECT NO.	RXL050131-A	VER.	A
UNIT	mm	SCALE	1:1
3rd Angle		SHEET	1 OF 1

RX Resiline Display (HK) Technology Co., Limited

