




Revision	Description	Date	Signal

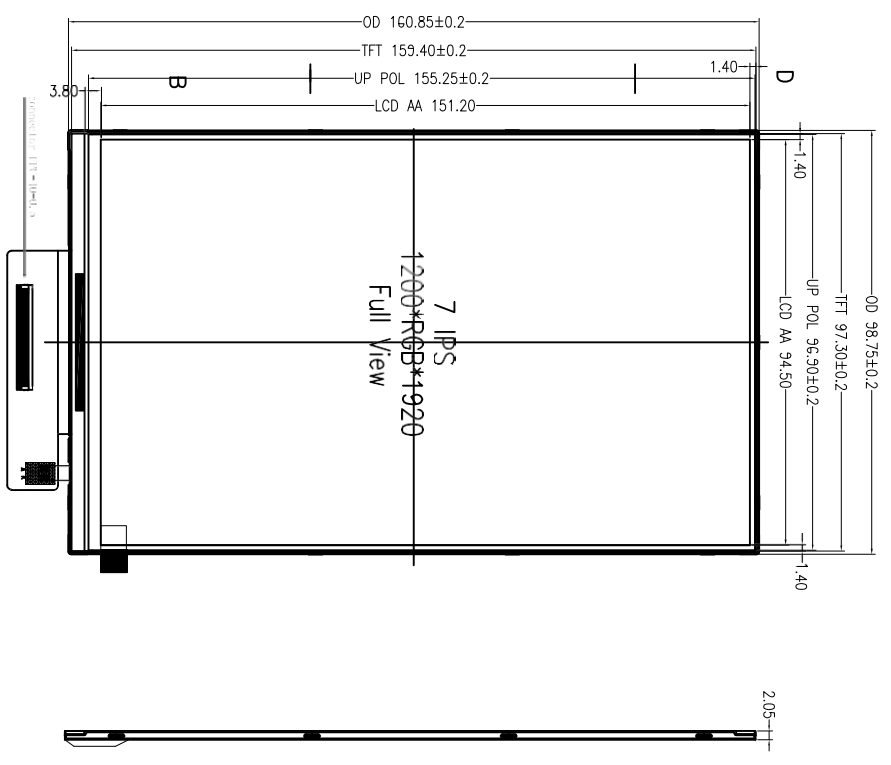

- NOTES:
1. DISPLAY TYPE: TFT/Normally White/transmissive
 2. OPERATING VOLTAGE: 3.3V
 3. OPERATING TEMPERATURE: -20°C~70°C
 4. STORAGE TEMPERATURE: -30°C~80°C
 5. VIEWING DIRECTION: 6 O'CLOCK
 6. POLARIZER TYPE: transmissive+
 7. UNMARKED TOLERANCE: ±0.2
 8. LUMINANCE 250cd/m2(min) 300cd/m2(typ)



电路原理图:

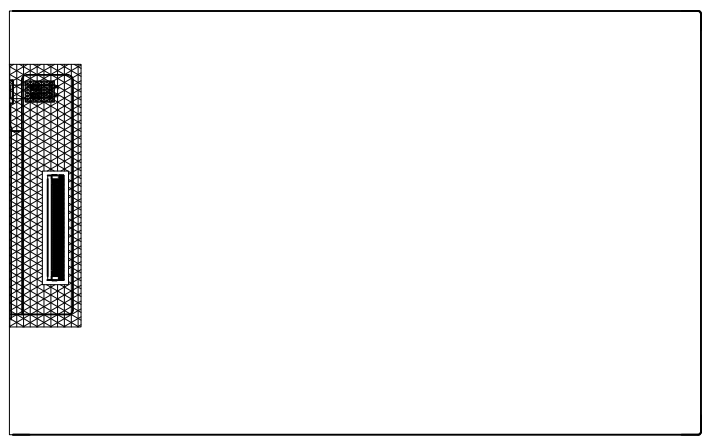

1	NC
2	IOVCC
3	IOVCC
4	GND
5	RESET
6	NC
7	GND
8	MIP1_ON
9	MIP1_OP
10	GND
11	MIP1_IN
12	MIP1_IP
13	GND
14	MIP1_CKN
15	MIP1_CKP
16	GND
17	MIP1_2N
18	MIP1_2P
19	GND
20	MIP1_3N
21	MIP1_3P
22	GND
23	HS
24	VS
25	GND
26	NC/TE
27	PWM0
28	NC/BISS
29	NC
30	GND
31	LEDK
32	LEDK
33	NC
34	VSN
35	VSN
36	NC
37	VSP
38	VSP
39	LEDA
40	LEDA

RX Reshine Display (HK) Technology Co., Limited

Customer Ref	Model No.	Drawing Title	Characteristics
---	Approve	Unmarked Tolerance	---
Part No.	Checked	±0.2	Unit
---	Draw	mm	Scale
Drawing No.	Date	15-3-17	Rev
---			A0
			Page
			1:1
			of

7 8 6 5 4 3 2 1