



Reshine Display (HK) Technology Co., Limited

瑞翔顯示（香港）科技有限公司

SPECIFICATION

规格书

| | |
|----------------------------------|---|
| 客户名称 Customer | |
| 产品型号 Part NO. | RXL070048-B |
| 产品内容 Product type | Mode: Transmissive type. Normally black. TFT LCD Module LCD Module: Graphic 1024RGB*600Dot-matrix |
| 备注栏 Remarks | <input type="checkbox"/> APPROVAL FOR SEPCIFICATIONS ONLY <input checked="" type="checkbox"/> APPROVAL FOR SEPCIFICATIONS AND SAMPLE |
| 客户确认签章 Signature by Customer: | |

| PREPARED BY | CHECKED BY | APPROVED BY |
|-------------|------------|-------------|
| | | |
| | | |

Address: 1 st Floor,Building H and 4th Floor,Building L,Third Industrial Park,Xinwei,Longhua,Shenzhen.

Contact Email: info@reshine-display.com



Reshine Display (HK) Technology Co., Limited

瑞翔顯示（香港）科技有限公司


1. PHYSICAL DATA

| Item | Contents | Unit |
|---------------------|---------------------------|-----------------|
| LCD type | TFT TRANSMISSIVE | --- |
| Viewing direction | All | o'clock |
| Module size (W×H×T) | 165 × 100 × 3.5 | mm ³ |
| Active area(W×H) | 154.2144×85.92 | mm ² |
| Number of dots(W×H) | 1024(RGB) × 600 | dots |
| Pixel Pitch(W×H)) | 0.1506×0.1432 | mm |
| Driver IC | HX8282 | --- |
| Colors | 16.7M | --- |
| Backlight Type | 27 white leds 9.6V /180mA | --- |
| Interface Type | LVDS | --- |





2. Mechanical Dimension

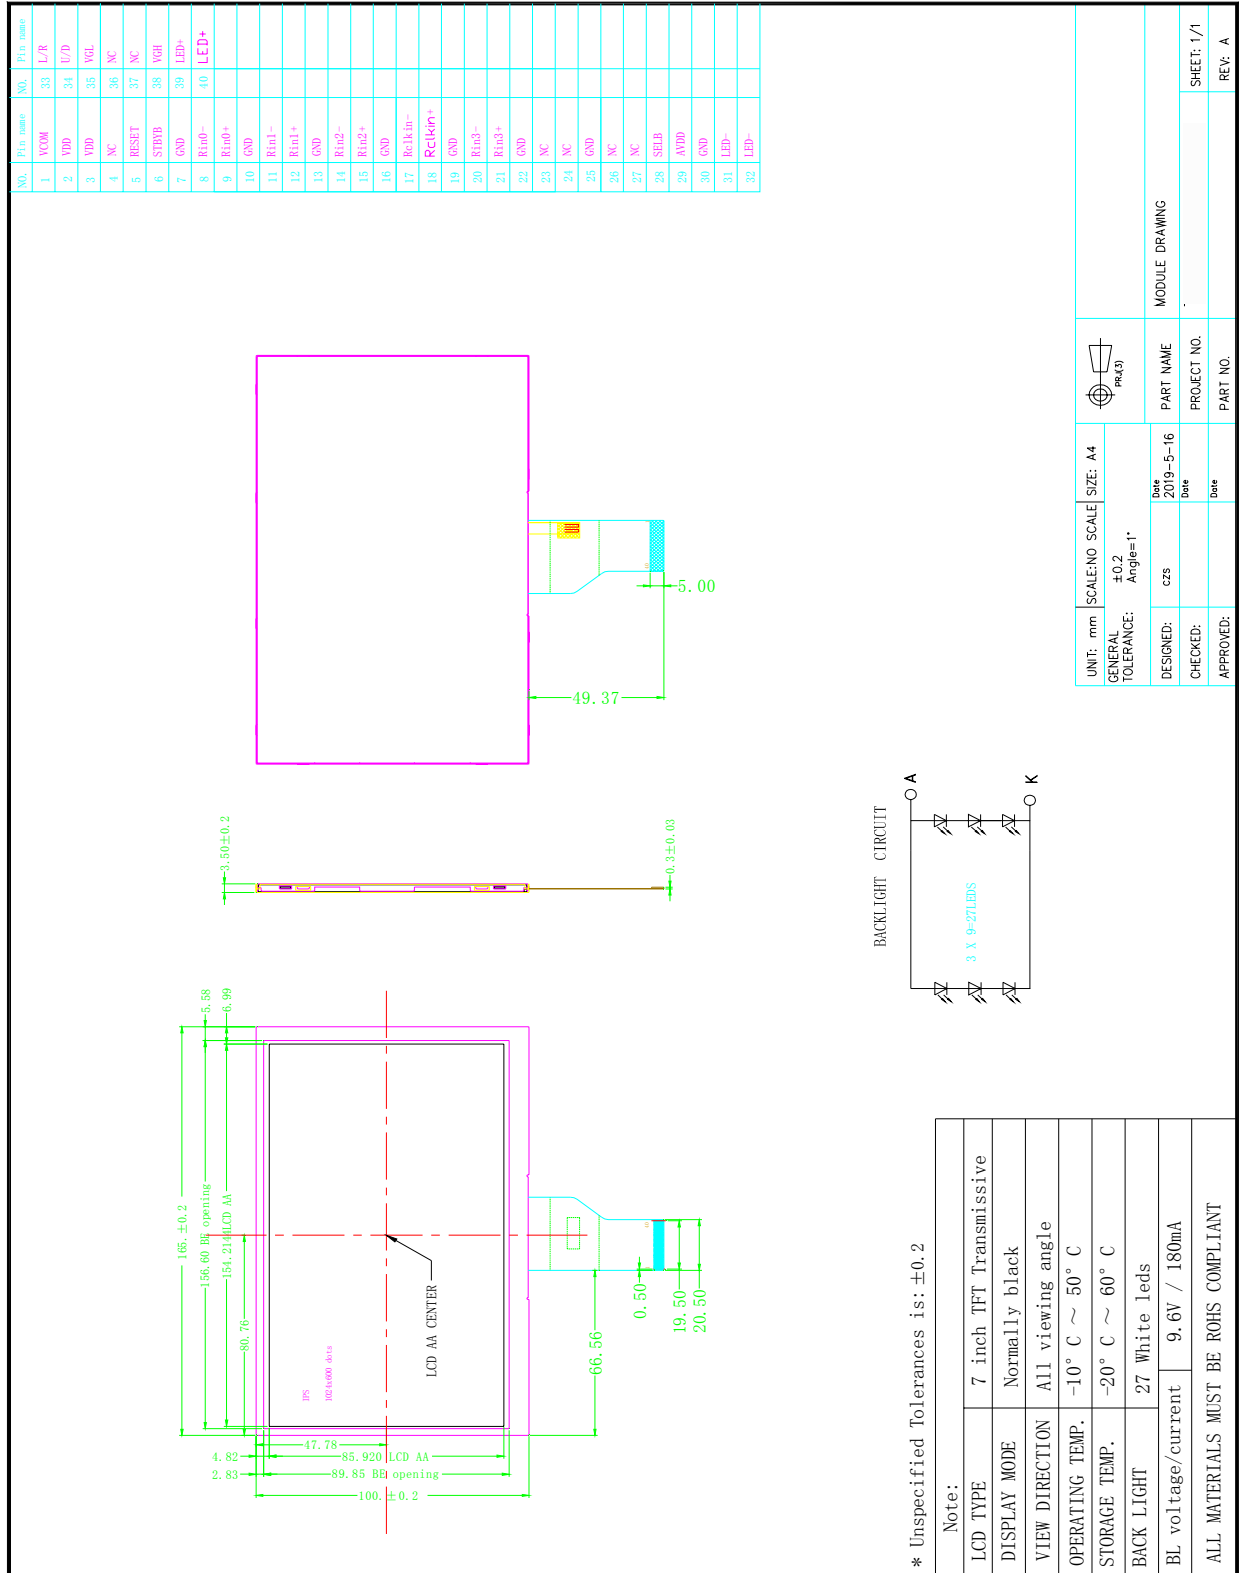



3. Pin Descriptions

| Pin No. | Symbol | Functional | Notes |
|---------|---------|--|-------|
| 1 | VCOM | Common Voltage | |
| 2~3 | VDD | Power Supply for digital circuit | |
| 4 | NC | No connection | |
| 5 | RESET | Global reset pin | |
| 6 | STBYB | Standby mode, Normally pulled high | |
| 7 | GND | Ground | |
| 8 | Rin0- | -LVDS differential data input | |
| 9 | Rin0+ | +LVDS differential data input | |
| 10 | GND | Ground | |
| 11 | Rin1- | -LVDS differential data input | |
| 12 | Rin1+ | +LVDS differential data input | |
| 13 | GND | Ground | |
| 14 | Rin2- | -LVDS differential data input | |
| 15 | Rin2+ | +LVDS differential data input | |
| 16 | GND | Ground | |
| 17 | RclkIN- | -LVDS differential clock input | |
| 18 | RclkIN+ | +LVDS differential clock input | |
| 19 | GND | Ground | |
| 20 | Rin3- | -LVDS differential data input | |
| 21 | Rin3+ | +LVDS differential data input | |
| 22 | GND | Ground | |
| 23-24 | NC | No connection | |
| 25 | GND | Ground | |
| 26 | NC | No connection | |
| 27 | NC | No connection | |
| 28 | SELB | 6bot/8bit mode select , L=8 BIT , H=6BIT | |
| 29 | AVDD | Power for Analog Circuit | |
| 30 | GND | Ground | |
| 31-32 | LED- | LED Cathode | |
| 33 | L/R | Horizontal inversion | |
| 34 | U/D | Vertical inversion | |
| 35 | VGL | Gate OFF Voltage | |
| 36 | NC | No connection | |
| 37 | NC | No connection | |
| 38 | VGH | Gate ON Voltage | |
| 39-40 | LED+ | LED Anode | |



4. OPERATION SPECIFICATION

4.1 Absolute maximum ratings

| Parameter | Symbol | Min | Max | Unit |
|-----------------------|------------------|------|-------|------|
| Power supply1 | V _{DD} | -0.5 | +3.96 | V |
| Power supply2 | A _{vdd} | -0.5 | +13.8 | V |
| Operating temperature | T _{OPR} | -10 | 50 | °C |
| Storage temperature | T _{STG} | -20 | 60 | °C |

4.2 Input voltage


| | |
|------------------|-------------|
| V _{GH} | 18V |
| V _{GL} | -6V |
| A _{VDD} | 9.6V |
| V _{COM} | 3.2V +/-0.1 |

Note: Please adjust V_{com} to make the flicker level be minimum



5. DC ELECTRICAL CHARACTERISTICS

| Parameter | Symbol | Spec. | | | Unit | Condition |
|---|----------------|--------------|------|----------------------|---------|-----------------------------------|
| | | Min. | Typ. | Max. | | |
| Differential input high Threshold voltage | R_{XVTH} | - | - | +0.1 | V | $R_{XVCM}=1.2V$ |
| Differential input low threshold voltage | R_{XVTL} | -0.1 | - | - | V | |
| Input voltage range (singled-end) | R_{XVIN} | 0 | - | $VDD-1.2+ V_{ID} /2$ | V | - |
| Differential input common Mode voltage | R_{XVCM} | $ V_{ID} /2$ | - | $VDD-1.2$ | V | - |
| Differential input voltage | $ V_{ID} $ | 0.2 | - | 0.6 | V | - |
| Differential input leakage Current | $R_{V_{XIL2}}$ | -10 | - | +10 | μA | - |
| LVDS Digital Operating Current | I_{ddlvds} | - | 15 | 30 | mA | $F_{clk}=65MHz, VDD=3.3V$ |
| LVDS Digital Stand-by Current | I_{stlvds} | - | 10 | 50 | μA | Clock & all Functions are stopped |

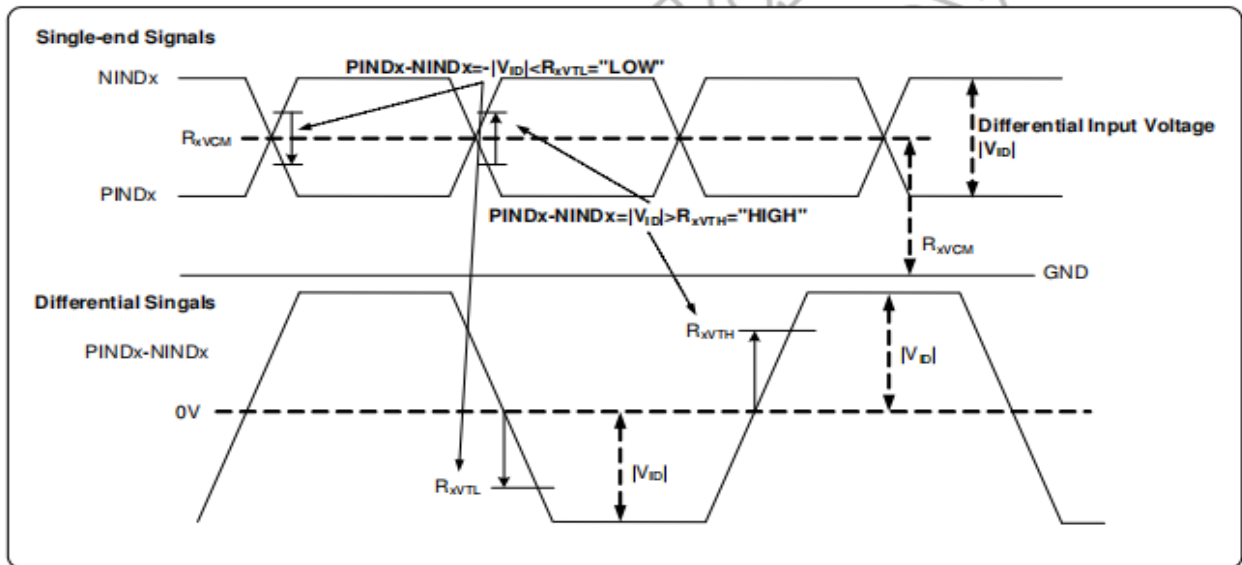



6. LVDS MODE DATA INPUT FORMAT

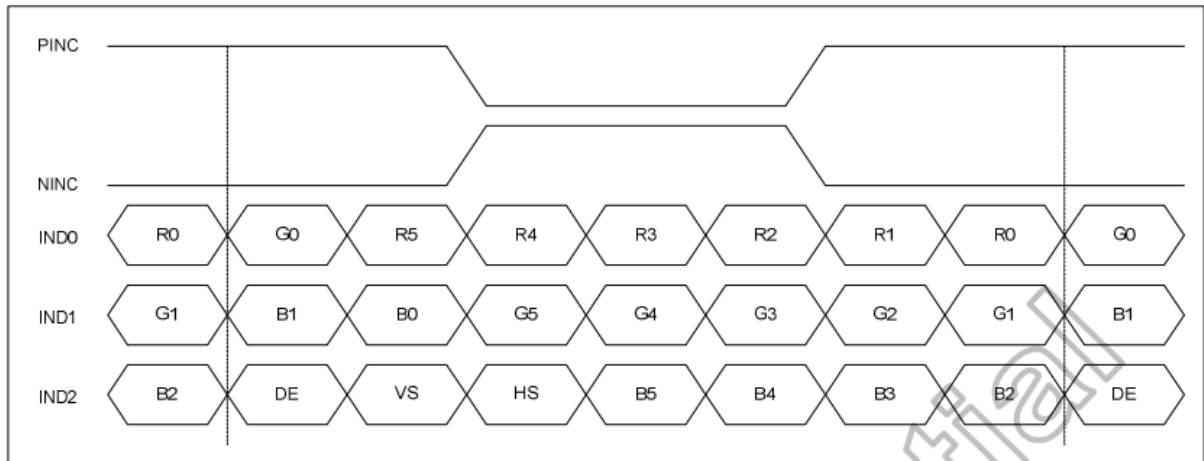


Figure 10.4: 6-bit LVDS input

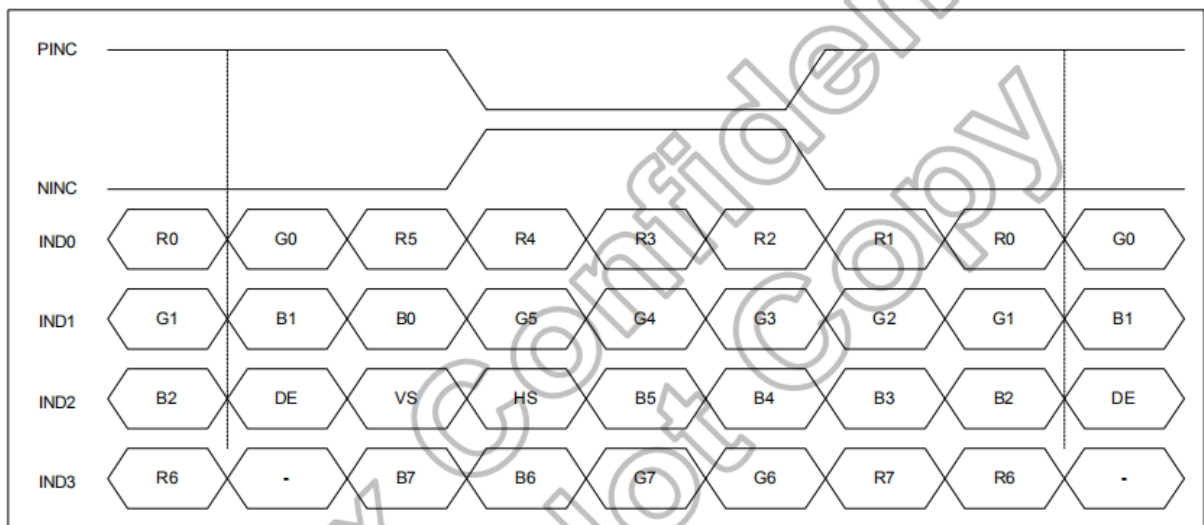


Figure 10.5: 8-bit LVDS Input



7. Backlight Characteristic


| Item | Symbol | Min | Typical | Max | Unit |
|-----------------------------------|-----------|-----|---------|-----|------|
| LED module Forward voltage | V_{LED} | -- | 9.3 | 9.6 | V |
| LED module current | I_{LED} | -- | 180 | -- | mA |
| L/G Surface Luminance ★1 | L_S | | 350 | | mcd |
| LCM Surface brightness uniform ★2 | L_D | 80 | -- | -- | % |

★ 1 Test condition is:

- (a) Center point on active area.
- (b) Best Contrast.

★2 Uniform measure condition:

- (1) Measure 9 point. Measure location show below;
- (2) $Uniform = (Min. \text{ brightness} / Max. \text{ brightness}) * 100\%$
- (3) Best Contrast.

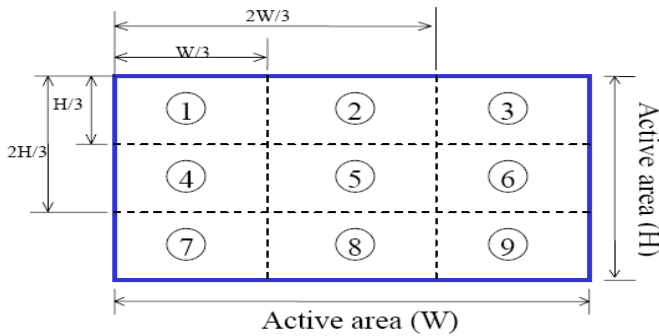

8. Electro-optical Characteristics

| Parameter | Symbol | Condition | Min. | Typ. | Max | Unit | Remark |
|-----------------------|----------|----------------|--------------|------|-----|------|--------|
| Viewing angle range | Hor. | $\phi 3$ | CR ≥ 10 | 80 | 85 | | Deg. |
| | | $\phi 9$ | | 80 | 85 | | Deg. |
| | Ver. | $\theta 12$ | | 80 | 85 | | Deg. |
| | | $\theta 6$ | | 80 | 85 | | Deg. |
| Color gamut (C light) | | | 50 | | | % | |
| Contrast ratio | T (%) | $\phi 0^\circ$ | 600 | 800 | | | |
| Response Time | T_{RT} | Temp=25° C | | 25 | 40 | ms | |



9. Reliability

9.1 MTBF

The LCD module shall be designed to meet a minimum MTBF value of 50000 hours with normal

9.2 Test condition

| NO. | ITEM | CONDITION | CRITERION |
|-----|--|---|---|
| 1 | High Temperature Non-Operating Test | 60°C*120Hrs | No Defect Of Operational Function In Room Temperature Are Allowable |
| 2 | Low Temperature Non-Operating Test | -20°C*120Hrs | |
| 3 | High Temperature/Humidity Non Operating Test | 60°C*75%RH*120Hrs | |
| 4 | High Temperature Operating Test | 50°C*120Hrs | |
| 5 | Low Temperature Operating Test | -10°C*120Hrs | |
| 6 | Thermal Shock Test | -10 °C (30Min) - 50 °C (30Min) *10CYCLES | |

Notes:

1. Judgments should be made after exposure in room temperature for two hours.
2. The distill water is used for the high temperature/humidity test.
3. The sample above is individually for every reliability tests condition.

10. Inspection standards

1.AQL(Acceptable Quality Level


AQL of major and minor defect.

| | MAJOR DEFECT | MINOR DEFECT |
|-----|--------------|--------------|
| AQL | 0.65 | 1.5 |

2. Basic conditions for inspection

The LCM face to us, in normal environment, the lux is 1000 ± 200 . (Darkroom's lux: 100 ± 50), About an angle of incidence 30, a distance of 30 cm with an angle of 45 degree to check the products without uncovering the film!

(As shown below)

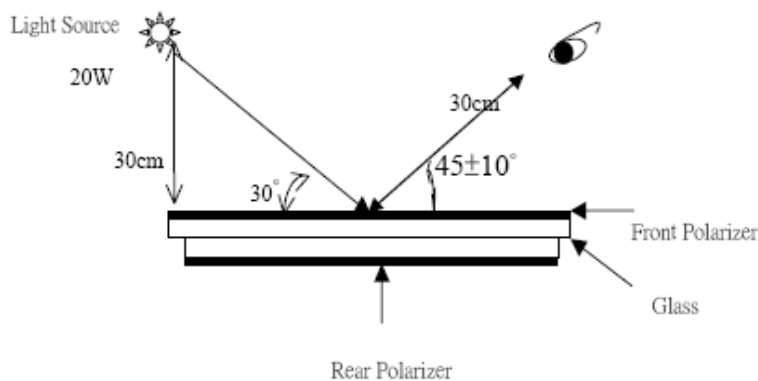



11. Precautions for using LCD modules.

11.1 Safety

- (1) Do not swallow any liquid crystal, even if there is no proof that liquid crystal is poisonous.
- (2) If the LCD panel breaks, be careful not to get liquid crystal to touch your skin.
- (3) If skin is exposed to liquid crystal, wash the area thoroughly with alcohol or soap.

11.2 Storage Conditions

- (4) Store the panel or module in a dark place where the temperature is $23 \pm 5^{\circ}\text{C}$ and the humidity is below $45 \pm 20\% \text{RH}$.
- (5) Store in anti-static electricity container.
- (6) Store in clean environment, free from dust, active gas, and solvent.
- (7) Do not place the module near organics solvents or corrosive gases.
- (8) Do not crush, shake, or jolt the module.

11.3 Handling Precautions

- (9) Avoid static electricity, which can damage the CMOS LSI.
- (10) The polarizing plate of the display is very fragile, please handle it very carefully.
- (11) Do not give external shock.
- (12) Do not apply excessive force on the surface.
- (13) Do not wipe the polarizing plate with a dry cloth, as it may easily scratch the surface of plate.
- (14) Do not use ketonic solvent & Aromatic solvent, use with a soft cloth soaked with a cleaning naphtha solvent.
- (15) Do not operate it above the absolute maximum rating.
- (16) Do not remove the panel or frame from the module.

11.4 Warranty

The period is within twelve months since the date of shipping out under normal using and storage conditions.
