


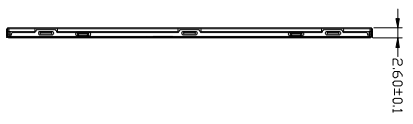


标注 * 请重点确认!

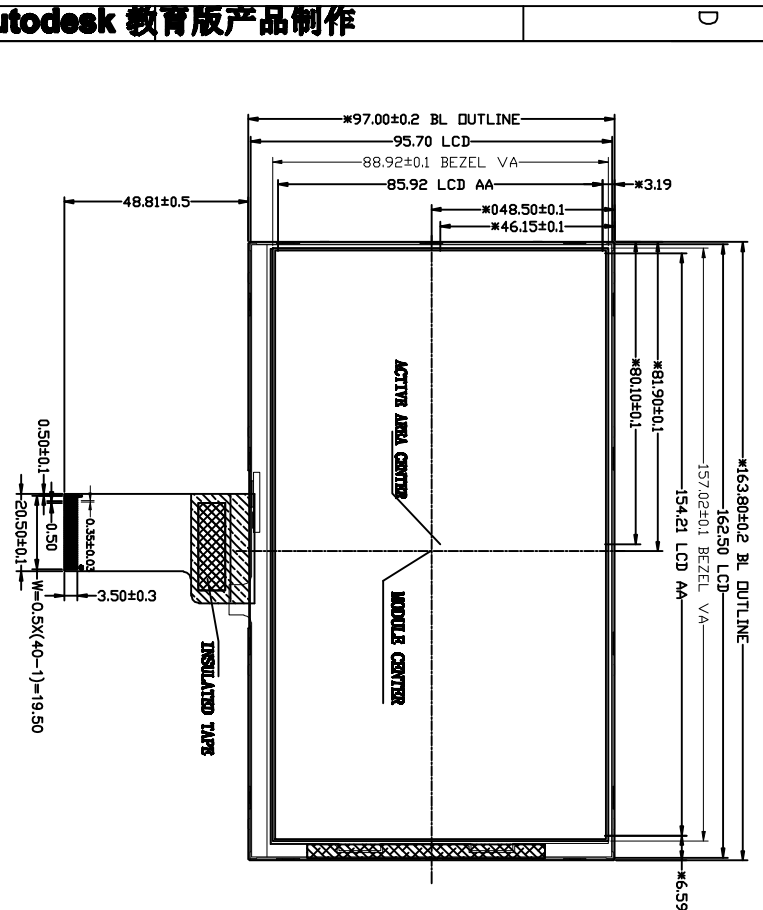

NOTE:

1. GENERAL TOLERANCE: ±0.2.
2. (...) IS REFERENCE DIMENSION.
3. COMPLIABLE ROHS.
4. 客户机壳上的泡棉需进入玻璃单边0.3mm (TYP), 防止漏光.
5. 客户需保证触摸屏下表面到玻璃上表面最少0.3mm以上(非贴合)

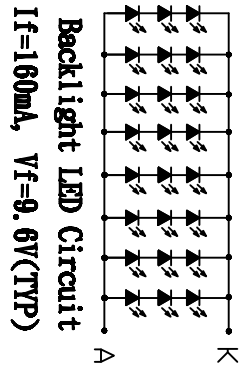

Backlight LED Circuit
If=160mA, Vf=9.6V(TYP)

Display Type	TFT
Main driver IC	NORMAL BLACK TRANSMISSIVE EK79001ECGA+EK73215
Operation Temperature	-20°C ~ 70°C
Storage Temperature	-30°C ~ 80°C
Connector	LVDS
Brightness	400nits
Backlight Forward Voltage	Vf=9.6V(TYP)(If=160mA)
CUSTOMER PROJECT NO.	

DRAWN	
CHECKED	
APPROVED	
CUSTOMER'S APPROVAL	

SYMBOL	
AMENDMENT	
SIGN	WJ
DATE	20180613

TITLE	MODULE SPEC.
DRAWING NO.	RXL070129-A
PROJECT NO.	RXL070129-A
UNIT	mm
SCALE	
SHEET	1 OF 1

3D Angle