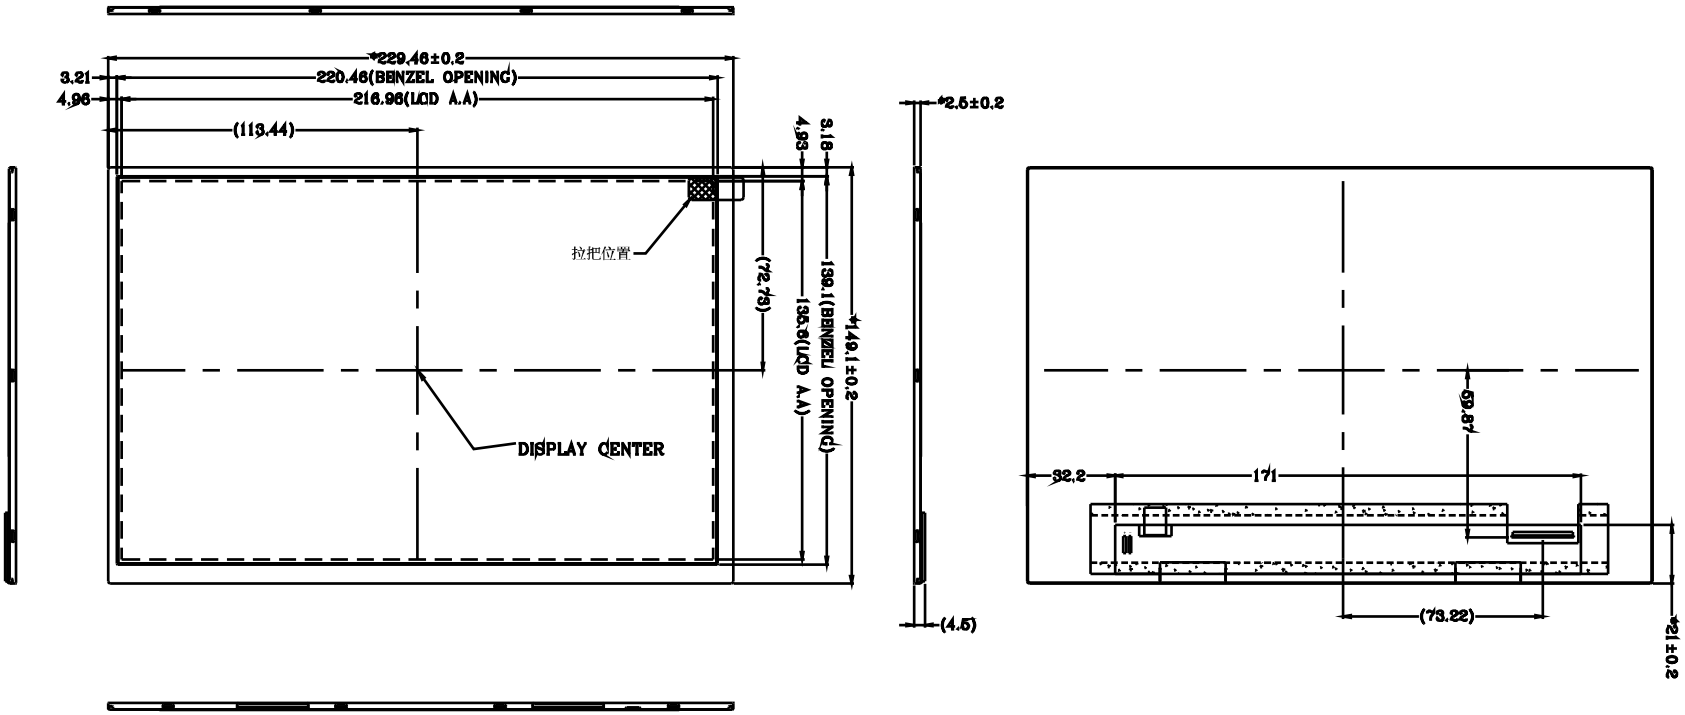

Notes:

1. Unit: mm,Do not scale drawing All radii without dimension R0.3.
2. Luminous intensity(5 AVG):250cd/m² (MIN),280cd/m² (TYP)Uniformity: 75%(min).
   Backlight VF:9.0V(min),9.6V(typ),
   10.5V (max),IF:200mA(fix).
   The color coordinates:

	MIN	TYP	MAX
X	0.24	0.29	0.33
Y	0.30	0.34	0.38

3. "△" Modification rev.number. "*"For important dimension, ()for reference dimension.Genral tolerance: ±0.3. draft angle: 1°.
4. Mark mold cavity indentification in recess approximately where indicated.
5. Finished Product deflection: 0.5mm Max.
6. Operation temperature: 0℃～+55℃,Storage temperature: -20℃～+60℃.
7. RoHs must be complied.(Use Lead-free process).



5点测试示意图