


Product highlights:

1. Integrated Video Tracking
2. High image quality and scene adaptability
3. Support for external input video (picture-in-picture)
4. OSD interface display
5. Custom character overlays
6. Rich communication interfaces
7. Small size, low power consumption

Dimensions

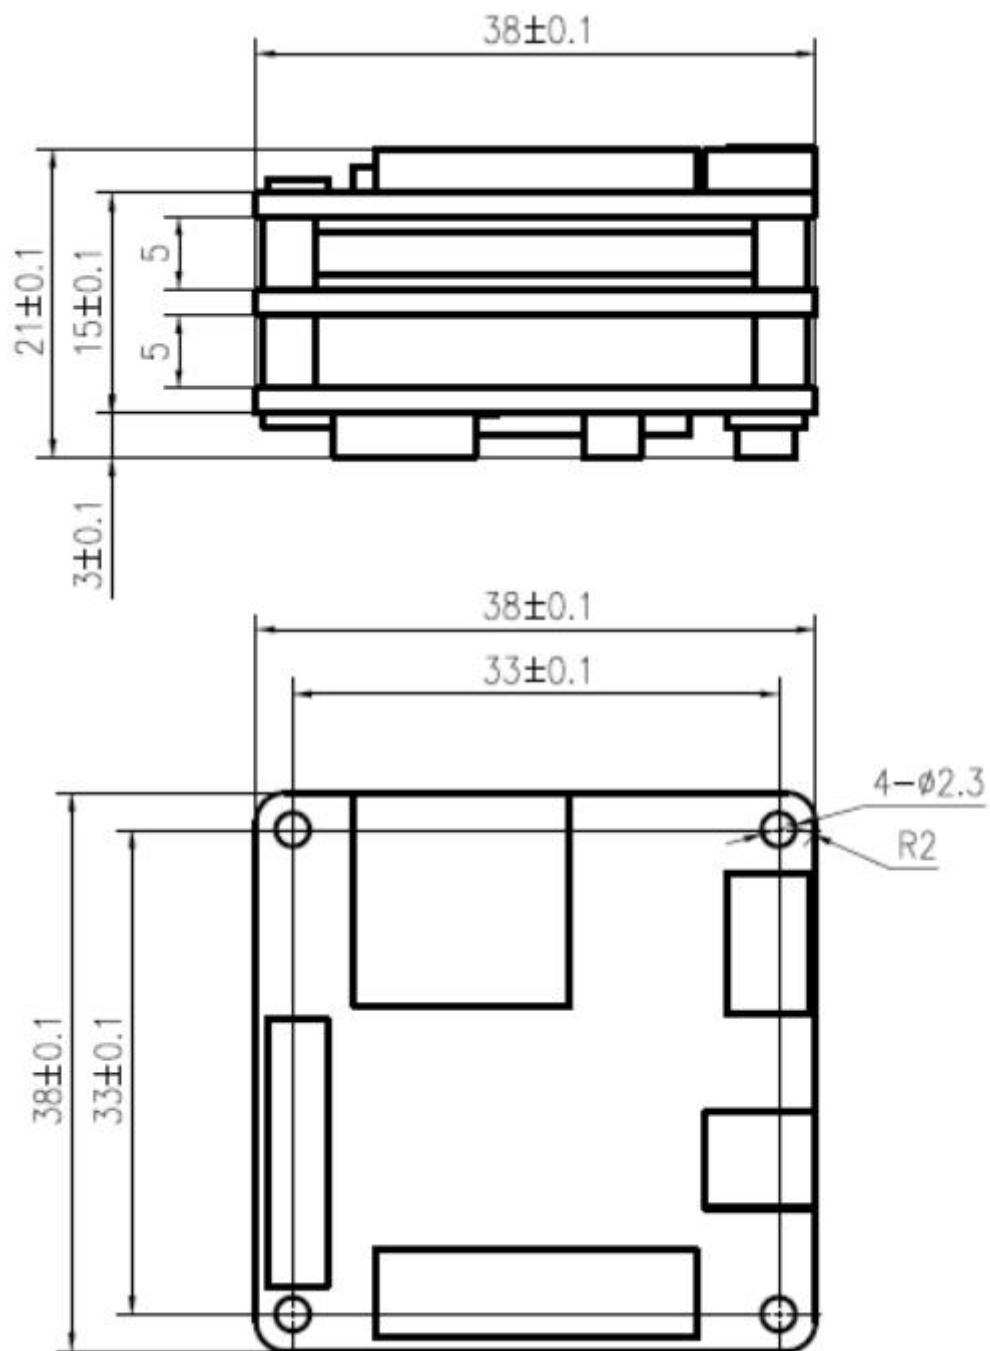

Parameters

MODEL		H2K-01	H2K-02	H2K-03
video format	Video input	HD 1080p		
	Video output	HD 1080p		
	Video storage	SD card for JPEG/H.264 (default 32G, support up to 128G)		
Tracking index	Frequency	25Hz-60Hz		
	Minimum target contrast	5%		
	Tracking speed	±32 pixels/frame		
	Target effective memory	100 frames		
	Target size	16×16~128×128pixels		
Electrical interface	Video input	LVDS		
	Video output	LVDS +Ethernet	SDI +Ethernet	HDMI micro +Ethernet
	Communication interface	TTL		
	Power input	DC 12V		
Environment suitability	Working temperature	-40℃~60℃		
	Storage temperature	-45℃~65℃		
Others	Size	38mm×38mm×21mm		
	Weight	<32g		
	Power	<3W (@25℃)		