
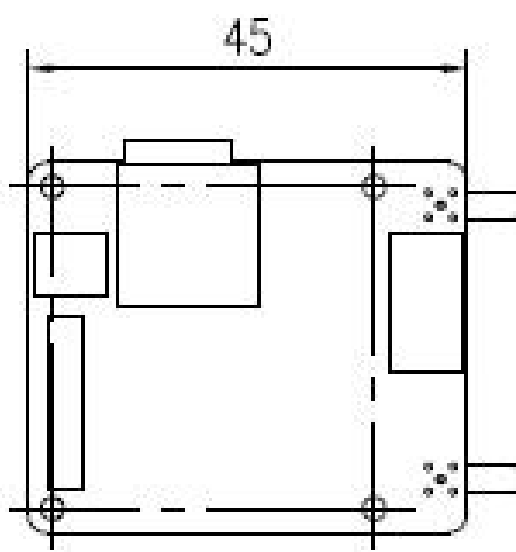
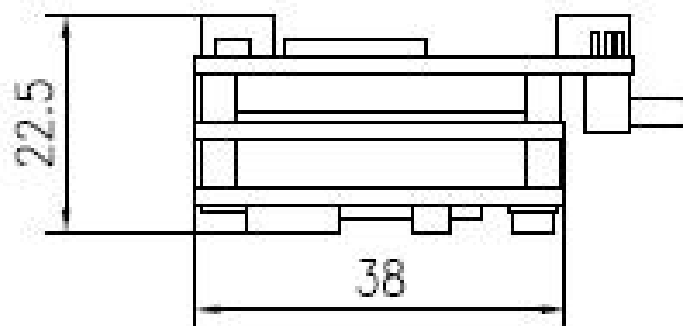


**Product highlights:**

1. Integrated Video Tracking
2. High image quality and scene adaptability
3. Support for external input video (picture-in-picture)
4. OSD interface display
5. Custom character overlays
6. Rich communication interfaces
7. Small size, low power consumption

## Dimensions

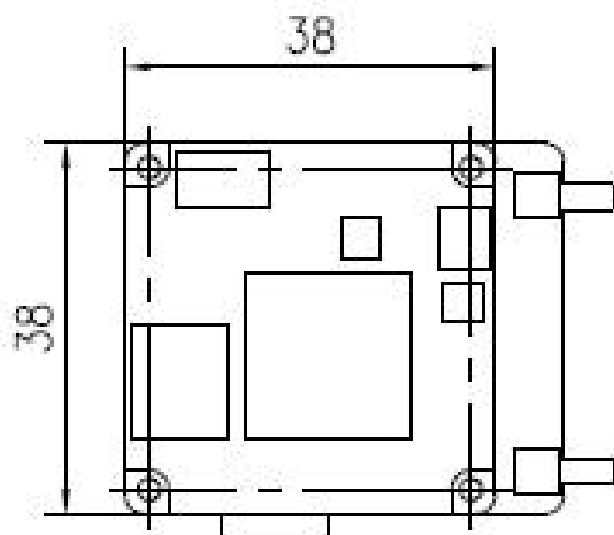

## Parameters

<b>MODEL</b>		<b>HDI</b>
<b>video format</b>	Video input	HD 1080p
	Video input -PAL	576i
	Video output	HD 1080p
	Video storage	SD card for JPEG/H.264 (default 32G, support up to 128G)
<b>Tracking index</b>	Frequency	25Hz-60Hz
	Minimum target contrast	5%
	Tracking speed	±32 pixels/frame
	Target effective memory	100 frames
	Target size	16×16~128×128pixels
<b>Electrical interface</b>	Video input	LVDS
	Video input	AV
	Video output	SDI +Ethernet
	Communication interface	RS422
	Power input	DC 12V
<b>Environment suitability</b>	Working temperature	-40℃~60℃
	Storage temperature	-45℃~65℃
<b>Others</b>	Size	45mm*38mm*22.5mm
	Weight	<31g
	Power	<3W (@25℃)