





• **Product Dimension**

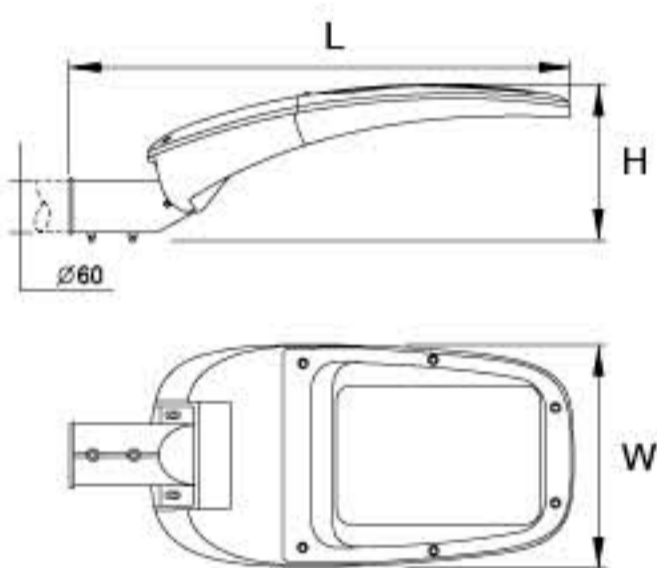

• **Light Distribution Curve**

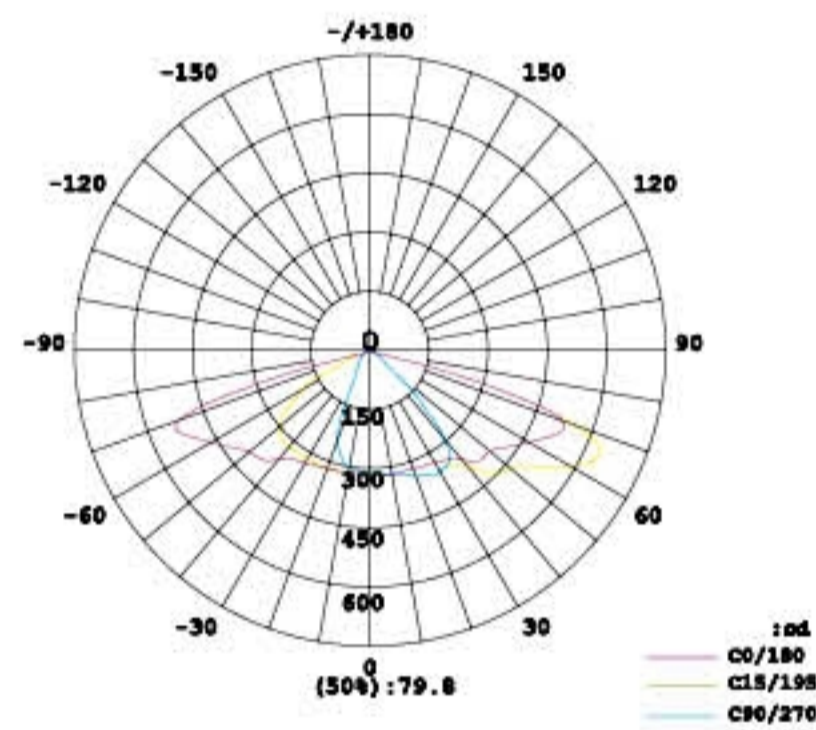

• **Technical Characteristics**

Product Code	KTSL2005	KTSL2005	KTSL2005	KTSL2005	KTSL2005
Power	60W	100W	150W	200W	240W
Dimension L*W*H(mm)	507x210x130mm	616x259x186mm	677x305x187mm	850x366x198mm	850x366x198mm
Installation Height	5-6M	8-10M	8-10M	10-12M	13-15M
Voltage	AC85-265V	AC85-265V	AC85-265V	AC85-265V	AC85-265V
CCT	2600K/3000K/4000K/6500K	2600K/3000K/4000K/6500K	2600K/3000K/4000K/6500K	2600K/3000K/4000K/6500K	2600K/3000K/4000K/6500K
Luminous flux	130-140LM/W	130-140LM/W	130-140LM/W	130-140LM/W	130-140LM/W
LED Type	Lumileds3030/Cree3030	Lumileds3030/Cree3030	Lumileds3030/Cree3030	Lumileds3030/Cree3030	Lumileds3030/Cree3030
LEDs qty	72PCS	96PCS	180PCS	240PCS	240PCS
LED Driver	MEANWELL	MEANWELL	MEANWELL	MEANWELL	MEANWELL
Material	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Install pole diameter	60mm	60mm	60mm	60mm	60mm
Beam angle	60°	60°	60°	60°	60°
Power factor	>0.98	>0.98	>0.98	>0.98	>0.98
CRI	>80	>80	>80	>80	>80
Lifetime	50000hrs	50000hrs	50000hrs	50000hrs	50000hrs
Warranty	5year	5years	5years	5years	5years
Certification:	CE&RoHS	CE&RoHS	CE&RoHS	CE&RoHS	CE&RoHS
Outer Carton/cm	560*240*255	680*295*150	750*165*355	915*415*185	915*415*185
Qty/Ctn	1set	1set	1set	1set	1set