


Aluminum Alloy Integrated Solar Billboard Light 3 Models **KTSL6804A(5W)**

Features:

- 100% waterproof
- Integrated Design for easy Installation
- Aluminum alloy , never fade
- Constant Lightng for illumination
- Auto on/off day and night

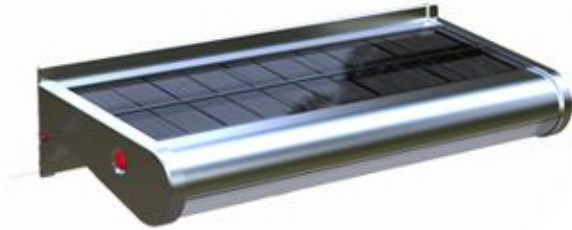

30CM




Technical Speficiaions

Epistar SMD LED	5W 100-120LM/W >50000H
LED QTY	24pcs
Battery Type	3.7V 4.4AH, Li-ion, >1000 cycle times
Solar Panel	4.5W Polycrystalline silicon Laminated Plate (Taiwan Neo) 25years
Charging method	Solar power
Solar charging time	6-8 hrs by bright sunshine
Lighting time	3-5 nights after full charged
Sensor	Light sensor
Lighting mode	5Hrs full bright +Dim
Material	Aluminum Alloy (Oxidation) + PC , Housing lifespan:>25years
Product Size	30*6.7*11.5CM
IP level	65
Working Temperature	-25°C ~ 65°C
Warranty	3 years
Patent No.	201621188843.9
Certificate	CE,ROHS ,FCC , ISO9001:2015
Installation height	1-2M
Package	Box Size: 32*13*7.5CM CTN Size : 67*40*26CM 18PCS N.W/G.W: 21/ 23KG

Aluminum Alloy Integrated Solar Billboard Light 3 Models KTSL6804B(10W)

Features:

- 100% waterproof
- Integrated Design for easy Installation
- Aluminum alloy , never fade
- Constant Lightng for illumination
- Auto on/off day and night

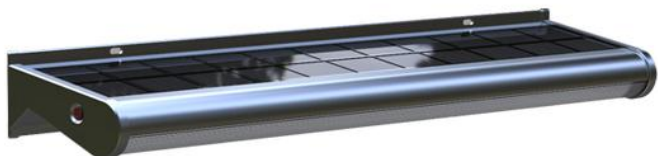

60CM



Technical Speficiaions

Epistar SMD LED	10W 100-120LM/W >50000H
LED QTY	48pcs
Battery Type	3.7V 8.8AH, Li-ion, >1000 cycle times
Solar Panel	9W Polycrystalline silicon Laminated Plate (Taiwan Neo) 25years
Charging method	Solar power
Solar charging time	6-8 hrs by bright sunshine
Lighting time	3-5 nights after full charged
Sensor	Light sensor
Lighting mode	5Hrs full bright +Dim
Material	Aluminum Alloy (Oxidation) + PC , Housing lifespan:>25years
Product Size	60*6.7*11.5CM
IP level	65
Working Temperature	-25°C ~ 65°C
Warranty	3 years
Patent No.	201621188843.9
Certificate	CE,ROHS ,FCC , ISO9001:2015
Installation height	1-2M
Package	Box Size: 62*13*7.5CM CTN Size : 67*40*26CM 9PCS N.W/G.W: 21/ 23KG


Aluminum Alloy Integrated Solar Billboard Light 3 Models **KTSL6804C(20W)**

Features:

- 100% waterproof
- Integrated Design for easy Installation
- Aluminum alloy , never fade
- Constant Lightng for illumination
- Auto on/off day and night



120CM

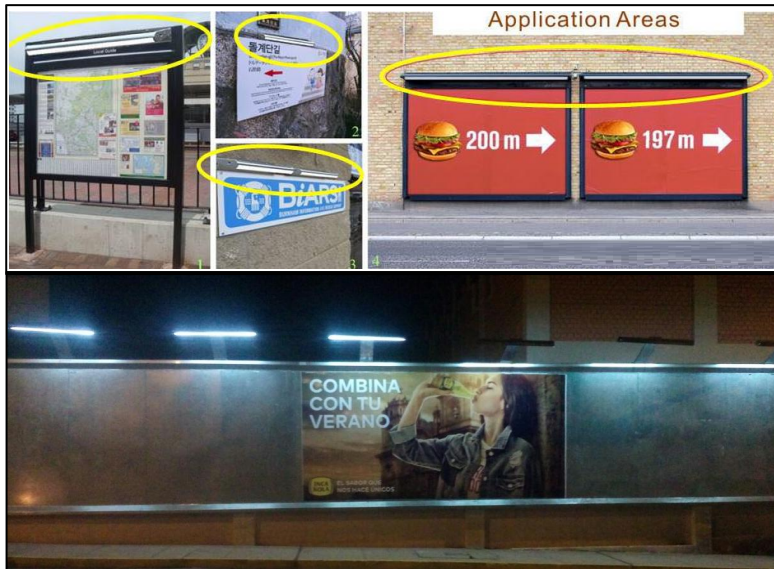

Technical Speficiaions	
Epistar SMD LED	20W 100-120LM/W >50000H
LED QTY	96pcs
Battery Type	3.7V 17.6H, Li-ion, >1000 cycle times
Solar Panel	18W Polycrystalline silicon Laminated Plate (Taiwan Neo)
	Housing lifespan:>25years
Product Size	120*6.7*11.5CM
IP level	65
Working Temperature	-25°C ~ 65°C
Warranty	3 years
Patent No.	201621188843.9
Certificate	CE,ROHS ,FCC , ISO9001:2015
Installation height	2-3M
Package	Box Size: 125*15*9CM 1PC N.W/G.W: 4.2/ 4.5KG