


KTSL7542



产品说明：
 铝压铸外壳
 钢化玻璃面罩
 整体密封结构
 二次配光技术
 配 NEMA 接口

Product description:
 Die cast aluminum housing
 Tempered glass mask
 Sealed lamp housing
 Double photometric diffuser technology
 Equipped with NEMA socket

灯具尺寸 Product Dimensions(mm)

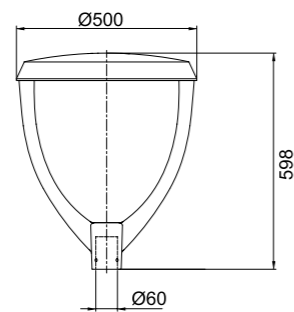

配置数据 / Configuration Data:



产品型号 Product Code	额定功率 Rated Power	LED 颗数 LED Qty	初始光通量 Luminous Flux	毛净重 G.W/N.W	包装尺寸 Packing Size	装柜数量 Loading Qty
KTSL7542-30(16)	30W	16	3690	10.3/8.8(kgs)	560x560x220mm	400PCS/20' GP
KTSL7542-40(20)	40W	20	4920	10.3/8.8(kgs)	560x560x220mm	
KTSL7542-55(24)	55W	24	6765	10.3/8.8(kgs)	560x560x220mm	
KTSL7542-60(28)	60W	28	7380	10.3/8.8(kgs)	560x560x220mm	
KTSL7542-70(32)	70W	32	8610	10.3/8.8(kgs)	560x560x220mm	1008PCS/40'HQ
KTSL7542-80(36)	80W	36	9840	10.3/8.8(kgs)	560x560x220mm	
KTSL7542-90(40)	90W	40	11070	10.3/8.8(kgs)	560x560x220mm	
KTSL7542-100(44)	100W	44	12300	10.3/8.8(kgs)	560x560x220mm	
KTSL7542-105(48)	105W	48	12915	10.3/8.8(kgs)	560x560x220mm	

Led Garden Lighting / 庭院灯





配光曲线 Polar Diagram



Type1

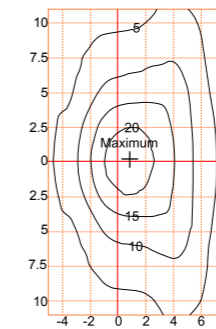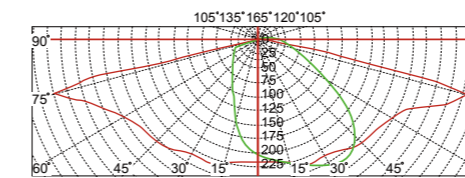

Type2

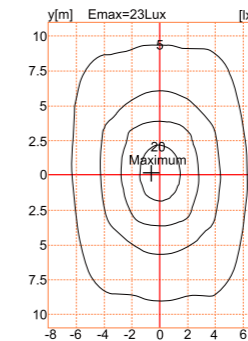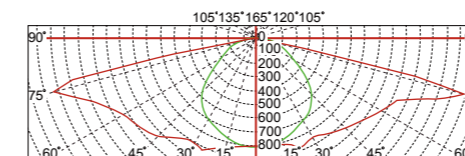

Type3

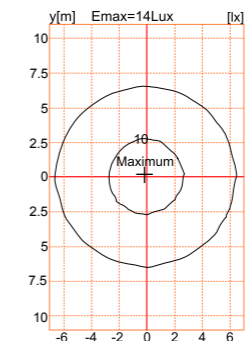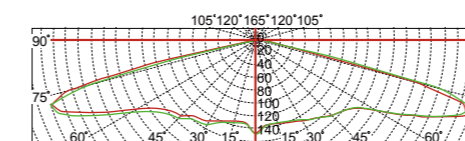

参考颜色 Reference color : RAL 9005 RAL 7015