




## KTBL1601

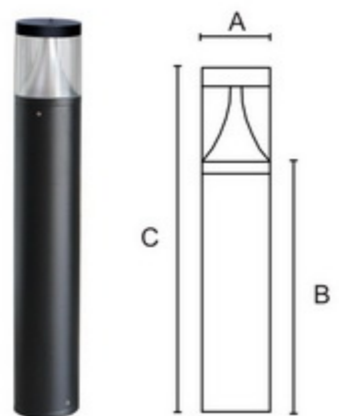


显色指数: 80  
 功率因数: 0.6  
 防护等级: IP54  
 材质: PC+压铸铝  
 色温: 3000K-6500K  
 CRI: 80  
 PF: 0.6  
 Protection class: IP54  
 Material: PC+Aluminium  
 CCT: 3000K-6500K

### COLOR



Item No.	Power	LM	Voltage	A	B	C(mm)
KTBL1601A-300	6W	360	110-265V	φ90	155	300
KTBL1601A-600	6W	360	110-265V	φ90	455	600
KTBL1601A-900	6W	360	110-265V	φ90	755	900
KTBL1601B-300	9W	540	110-265V	φ108	155	300
KTBL1601B-600	9W	540	110-265V	φ108	455	600
KTBL1601B-900	9W	540	110-265V	φ108	755	900
KTBL1601C-300	12W	720	110-265V	φ150	155	300
KTBL1601C-600	12W	720	110-265V	φ150	455	600
KTBL1601C-900	12W	720	110-265V	φ150	755	900

## KTBL1602

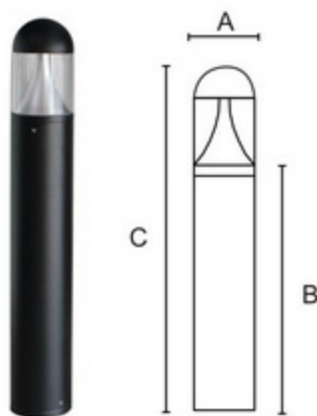

显色指数: 80  
 功率因数: 0.6  
 防护等级: IP54  
 材质: PC+压铸铝  
 色温: 3000K-6500K  
 CRI: 80  
 PF: 0.6  
 Protection class: IP54  
 Material: PC+Aluminium  
 CCT: 3000K-6500K

### COLOR



Item No.	Power	LM	Voltage	A	B	C(mm)
KTBL1602A-300	6W	360	110-265V	φ90	145	300
KTBL1602A-600	6W	360	110-265V	φ90	445	600
KTBL1602A-900	6W	360	110-265V	φ90	745	900
KTBL1602B-300	9W	540	110-265V	φ108	145	300
KTBL1602B-600	9W	540	110-265V	φ108	445	600
KTBL1602B-900	9W	540	110-265V	φ108	745	900
KTBL1602C-300	12W	720	110-265V	φ150	145	300
KTBL1602C-600	12W	720	110-265V	φ150	445	600
KTBL1602C-900	12W	720	110-265V	φ150	745	900

