


显色指数: 80  
 功率因数: 0.6  
 防护等级: IP54  
 材质: PC+压铸铝  
 色温: 3000K-6500K  
 CRI: 80  
 PF: 0.6  
 Protection class: IP54  
 Material: PC+Aluminium  
 CCT: 3000K-6500K

COLOR



Item No.	Power	LM	Voltage	A	B	C(mm)
KTBL1619-1A	10W	450	110-265V	120	200	300
KTBL1619-1B	10W	450	110-265V	120	200	600
KTBL1619-1C	10W	450	110-265V	120	200	900

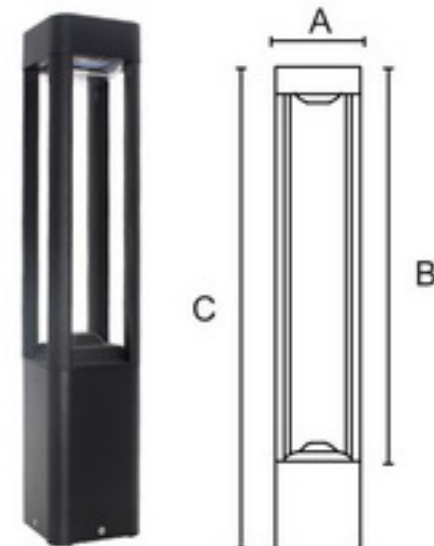

显色指数: 80  
 功率因数: 0.6  
 防护等级: IP54  
 材质: PC+压铸铝  
 色温: 3000K-6500K  
 CRI: 80  
 PF: 0.6  
 Protection class: IP54  
 Material: PC+Aluminium  
 CCT: 3000K-6500K

COLOR



Item No.	Power	LM	Voltage	A	B	C(mm)
KTBL1619-2A	10W	450	110-265V	120	400	600
KTBL1619-2B	10W	450	110-265V	120	700	900

