



www.kontakledlight.com


KTBL4053/F

简述


材 料: 铝压铸盖帽, 拉伸铝合金灯体
表面处理: 防紫外线静电喷涂
光学部件: PMMA透光罩

Description


Material: Die-casting aluminum cover extruded aluminum pole.
Finishing: Surface anti-ageing electrostatic spray processing.
Optical system: PMMA diffuser.



配光曲线图 Photometric Data

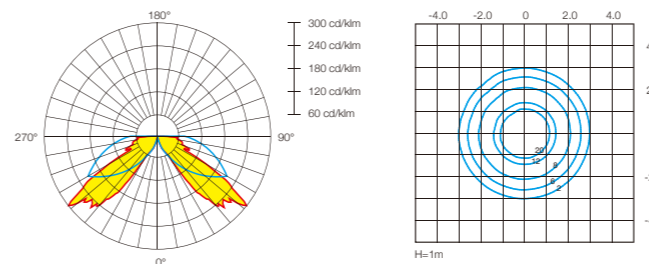

尺寸简图 Dimensions



技术参数表 Technology Data

货号 Code	光源 Lamp	输入电压 Input voltage	功率 Output power	LED颗数 LED Pcs	流明输出 Lumen	净重 N.W.(kg)	毛重 G.W.(kg)	包装尺寸 Packing box size (mm)
KTBL4053LED-H80	SMD, With driver	100V-240V	25W	132	1650	5.0	5.6	185×185×820
KTBL4053LED-H100		100V-240V	25W	132	1650	5.3	6.0	185×185×1020
KTBL4053FLED-H80	SMD, With driver	100V-240V	25W	132	1650	5.0	5.6	185×185×820
KTBL4053FLED-H100		100V-240V	25W	132	1650	5.3	6.0	185×185×1020