


KTBL4055

简述


材 料: 铝压铸盖帽, 拉伸铝合金灯体
 表面处理: 防紫外线静电喷涂
 光学部件: PMMA 雾状扩散罩

Description


Material: Die-casting aluminum cover, extruded aluminum pole.
 Finishing: Surface anti-ageing electrostatic spray processing.
 Optical system: PMMA diffuser.



配光曲线图 Photometric Data

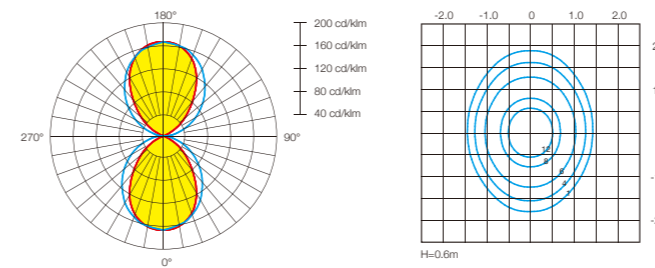

尺寸简图 Dimensions



技术参数表 Technology Data

货号 Code	光源 Lamp	输入电压 Input voltage	功率 Output power	LED颗数 LED Pcs	流明输出 Lumen	净重 N.W.(kg)	毛重 G.W.(kg)	包装尺寸 Packing box size (mm)
KTBL4055-H45	SMD, With driver	100V-240V	15W	168	820	1.7	11.5	410×110×60 (内) 420×230×200 (外)
KTBL4055-H60	SMD, With driver	100V-240V	24W	240	1320	2.0	13.5	610×110×60 (内) 620×230×200 (外)