



# KTSL4015



www.kontakledlight.com



## 简述

灯体材质: 铝合金压铸成型  
 光学部件: 耐高温PP塑料反射罩, 表面UV处理, 超白钢化玻璃  
 电器板: 电镀镀锌铁板  
 表面处理: 防紫外线纯聚酯塑粉喷涂  
 安装高度: 3-6m  
 固定方式: Ø60 / Ø76mm




## Description

Body: Die-cast aluminium.  
 Optical system: Anodized PP plastic reflector and special light distribution lens, super white tempered glass.  
 Gear plate: Galvanized steel plate.  
 Finishing: Surface anti-ageing electrostatic spray processing, super resistance to corrosion.  
 Assembling height: 3-6m.  
 Fixing: Ø60 / Ø76mm top fixing.

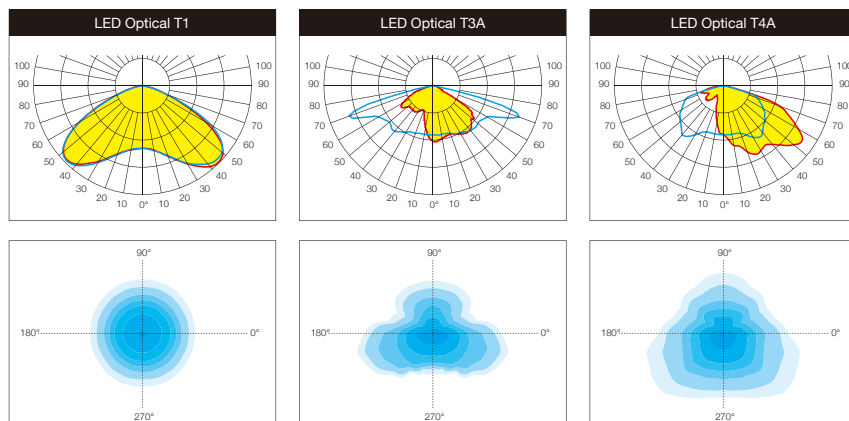

MD-04LED

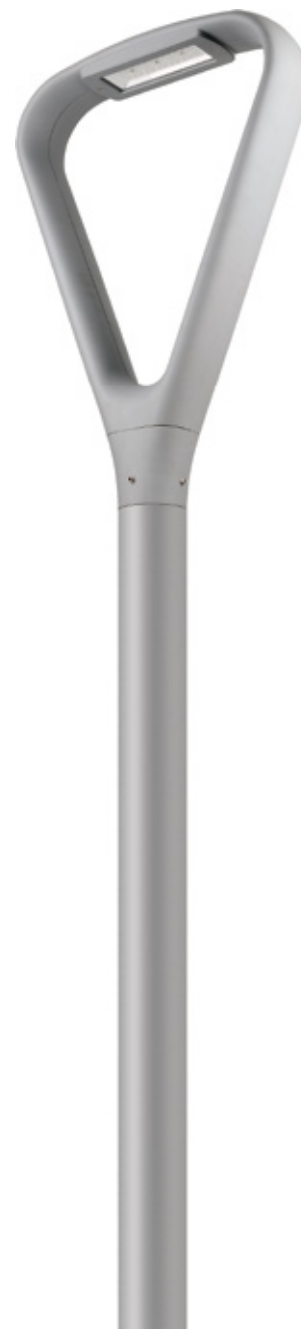

## 技术参数表 Technology Data

货号 Code	光源 Lamp	功率 Output power	LED颗数 LED Pcs	净重 N.W.(kg)	毛重 G.W.(kg)	包装尺寸 Packing box size (mm)	装箱数量 Quantity in a container	
							Pcs/20"	Pcs/40"
KTSL4015LED60-12	XPL	60W	12	13.5	15.0	920×580×170	435	885
KTSL4015LED80-12		80W	12	13.5	15.0			
KTSL4015LED40-12	3535 5050	40W	12	13.5	15.0			
KTSL4015LED60-18		60W	18	13.5	15.0			