

KTSL4016M



www.kontakledlight.com

简述

灯体材质: 铝合金压铸成型
光学部件: 模块式配光透镜, 超白钢化玻璃
电器板: 电镀锌铁板, 按钮式自动脱卸扣紧器
电器: 开合断路器连接器
表面处理: 防紫外线纯聚酯塑粉喷涂
安装高度: 7-10m
固定方式: Ø60钢管侧装或竖装, 角度可调


Description

Body: Die-cast aluminium.
Optical system: Adopt modular light distribution lens, diffuser with super white tempered glass.
Gear plate: Galvanized steel plate, button design for opened device.
Electric: Quick on/off connector when be open.
Finishing: Surface anti-ageing electrostatic spray processing, super resistance to corrosion.
Assembling height: 7-10m.
Fixing: Top or side fitting Ø60mm, angle can be adjustable.






应用透镜 Optical Application

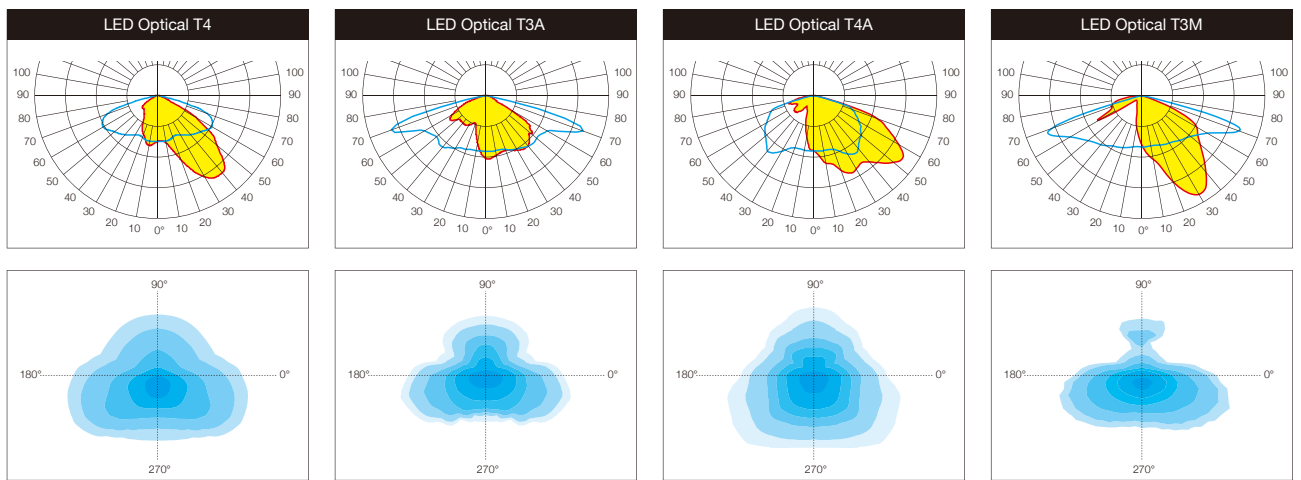

尺寸简图 Dimensions

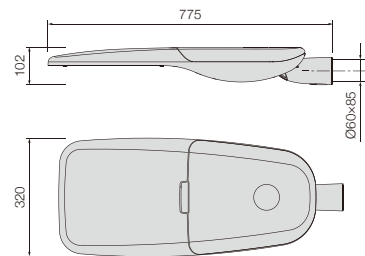

技术参数表 Technology Data

货号 Code	光源 Lamp	功率 Output power	LED颗数 LED Pcs	净重 N.W.(kg)	毛重 G.W.(kg)	包装尺寸 Packing box size (mm)	装箱数量 Quantity in a container	
							Pcs/20"	Pcs/40"
KTSL4016MLED100-48	3535 5050	100W	48	9.4	10.5	850×375×155	600	1260
KTSL4016MLED120-48		120W	48	9.4	10.5			
KTSL4016MLED120-64		120W	64	9.4	10.5			
KTSL4016MLED150-64		150W	64	9.5	10.6			
KTSL4016MLED180-64		180W	64	9.5	10.6			

KTSL4016S



简述

灯体材质: 铝合金压铸成型
光学部件: 模块式配光透镜, 超白钢化玻璃
电器板: 电镀锌铁板, 按钮式自动脱卸扣紧器
电器: 开合断路器连接器
表面处理: 防紫外线纯聚酯塑粉喷涂
安装高度: 5-8m
固定方式: Ø60钢管侧装或竖装, 角度可调


Description

Body: Die-cast aluminium.
Optical system: Adopt modular light distribution lens, diffuser with super white tempered glass.
Gear plate: Galvanized steel plate, button design for opened device.
Electric: Quick on/off connector when be open.
Finishing: Surface anti-ageing electrostatic spray processing, super resistance to corrosion.
Assembling height: 5-8m.
Fixing: Top or side fitting Ø60mm, angle can be adjustable.






应用透镜 Optical Application

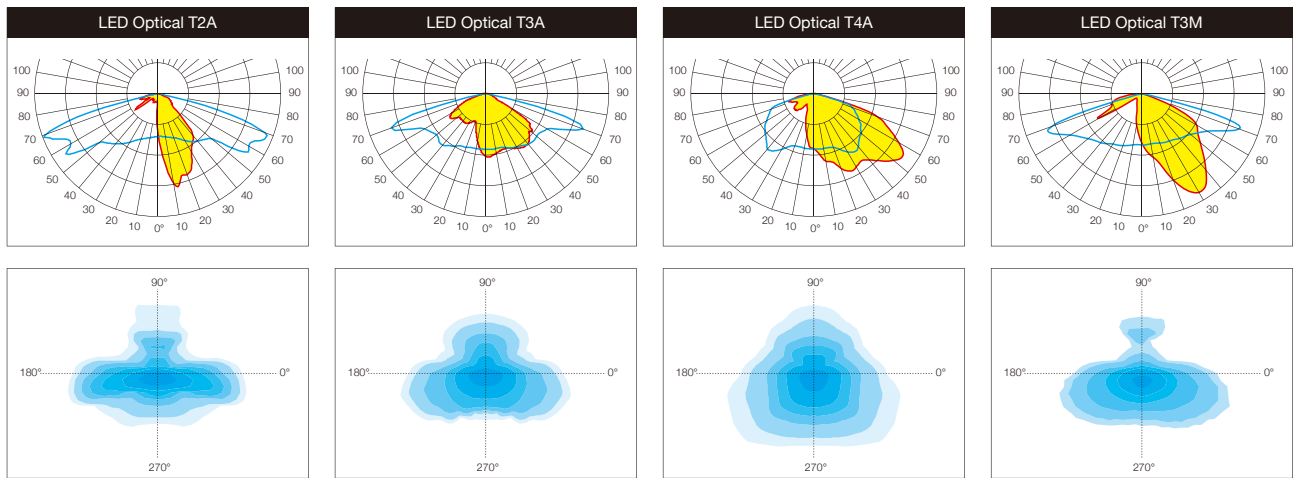

尺寸简图 Dimensions



技术参数表 Technology Data

货号 Code	光源 Lamp	功率 Output power	LED颗数 LED Pcs	净重 N.W.(kg)	毛重 G.W.(kg)	包装尺寸 Packing box size (mm)	装箱数量 Quantity in a container	
							Pcs/20"	Pcs/40"
KTSL4016SLED40-24	3535 5050	40W	24	6.5	7.5	695×315×155	885	1845
KTSL4016SLED60-24		60W	24	6.5	7.5			
KTSL4016SLED60-32		60W	32	6.5	7.5			
KTSL4016SLED80-32		80W	32	6.6	7.6			
KTSL4016SLED100-48		100W	48	6.6	7.6			

KTSL4016S1



简述

灯体材质: 铝合金压铸成型
光学部件: 模块式配光透镜, 超白钢化玻璃
电器板: 电镀锌铁板, 按钮式自动脱卸扣紧器
电器: 开合断路器连接器
表面处理: 防紫外线纯聚酯塑粉喷涂
安装高度: 4-6m
固定方式: Ø60钢管侧装或竖装, 角度可调


Description

Body: Die-cast aluminium.
Optical system: Adopt modular light distribution lens, diffuser with super white tempered glass.
Gear plate: Galvanized steel plate, button design for opened device.
Electric: Quick on/off connector when be open.
Finishing: Surface anti-ageing electrostatic spray processing, super resistance to corrosion.
Assembling height: 4-6m.
Fixing: Top or side fitting Ø60mm, angle can be adjustable.






应用透镜 Optical Application

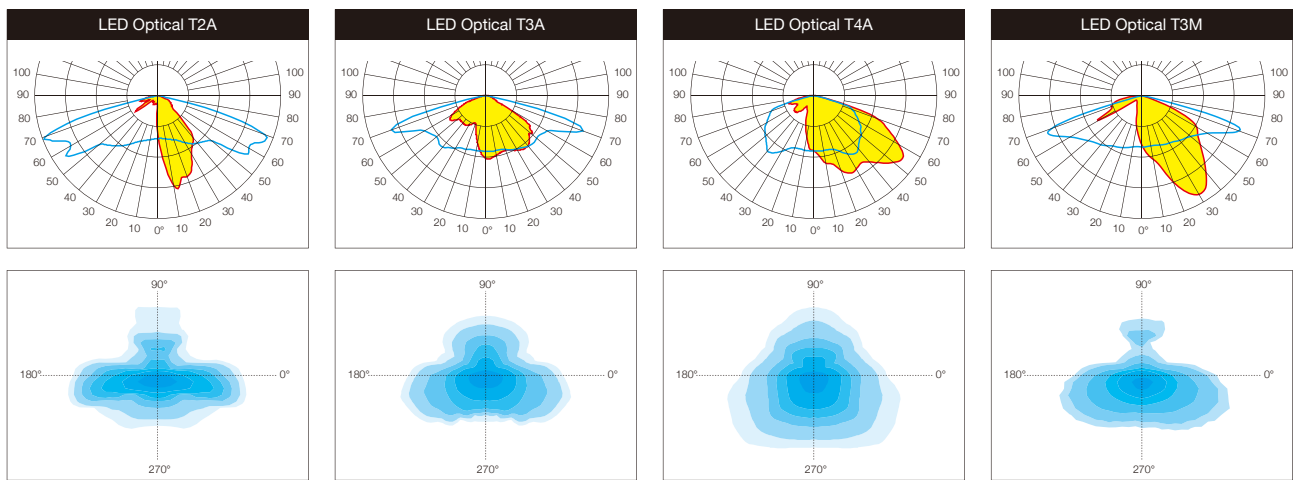

尺寸简图 Dimensions



技术参数表 Technology Data

货号 Code	光源 Lamp	功率 Output power	LED颗数 LED Pcs	净重 N.W.(kg)	毛重 G.W.(kg)	包装尺寸 Packing box size (mm)	装箱数量 Quantity in a container	
							Pcs/20"	Pcs/40"
KTSL4016S1LED30-16	3535 5050	30W	16	5.2	6.1	585×285×155	1200	2475
KTSL4016S1LED40-24		40W	24	5.3	6.2			
KTSL4016S1LED60-24		60W	24	5.3	6.2			