

KTSL4026



www.kontakledlight.com

简述

灯体材质: 铝合金压铸成型
光学部件: 阳极氧化反射罩, 平面钢化玻璃
电器板: 电镀锌铁板, 弹性铝合金扣紧器
表面处理: 防紫外线纯聚酯塑粉喷涂
安装高度: 6-9m
固定方式: Ø60钢管侧装或竖装, 角度可调


Description

Body: Die-cast aluminium.
Optical system: Anodized aluminium reflector and flat tempered glass diffuser.
Gear plate: Galvanized steel plate, extruded aluminium fasten.
Finishing: Surface anti-ageing electrostatic spray processing, super resistance to corrosion.
Assembling height: 6-9m.
Fixing: Top or side fitting Ø60mm, angle can be adjustable.






应用透镜 Optical Application

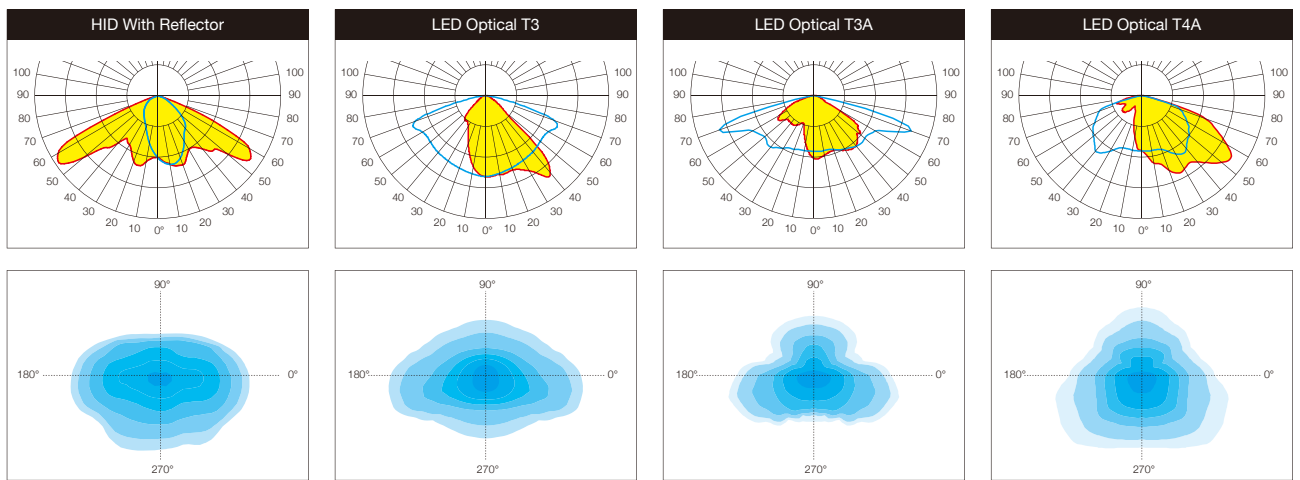

尺寸简图 Dimensions



技术参数表 Technology Data

货号 Code	光源 Lamp	功率 Output power	LED颗数 LED Pcs	净重 N.W.(kg)	毛重 G.W.(kg)	包装尺寸 Packing box size (mm)	装箱数量 Quantity in a container	
							Pcs/20"	Pcs/40"
KTSL4026	HPS/MH	70W-250W	/	5.2	6.0	610×290×245	594	1251
KTSL4026LED30-16	3535 5050	30W	16	6.1	6.9			
KTSL4026LED40-24		40W	24	6.8	7.6			
KTSL4026LED60-24		60W	24	6.8	7.6			
KTSL4026LED80-32		80W	32	7.4	8.2			