

Fiber Optic **80N.cm** 20:1 Contra Angle




Usage Guidelines

Icon/Function	position	pilot drill	twist drill	screw tap	implant	cover screw	mode	rinse
Range of Rotation/rpm	5-2,000	5-2,000	5-2,000	5-80	5-100	5-100	5-2,000/10-2,500/500-200,000/100-40,000	/
Torque range/N.cm	5-70	5-70	5-70	5-70	5-70	5-70	5-70	/
Transmission ratio	20:1	20:1	20:1	20:1	20:1	20:1	20:1/16:1/1:5/1:1	/
Forward and Reverse	Forward and Reverse switching							/
Water flow rate	5 levels adjustable							/
Brightness of LED	4 levels of brightness adjustable							/

Technical data

Voltage:220VAC	Motor maximum output torque:70N·cm
Maximum power consumption:170VA	Rated voltage range of motor speed range:(100-40,000)r/min
Maximum mechanical output power:70W	Cooling water flow rate at 100%:>90ml/min
Motor maximum torque:5.5N.cm	Illumination of LED: Not less than 2,000 Lux

High torque, up to 80N.cm

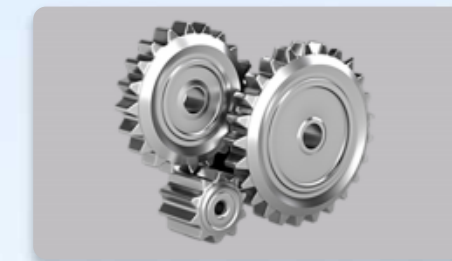

Imported bearings

