

Add: 10-2-101 Fenghexinyuan Nankai District Tianjin China  
 Tel:+86 22 87348386 Web:www.newroc-phe.com E-mail:info@newroc-phe.com

## Perfect Replacement For APV Plate Heat Exchanger Gasket

Perfect product needs perfect material, strictly control the production and strict delivery inspection. We strictly enforce the requirements of ISO9000, and strictly control every aspect of production, so that each Gasket has can be traced back.

After years of efforts in the OEM and aftermarket we have now accumulated more than 200 types of PHE Gasket mold, and meet gasket EPDM, NBR, VITON manufacturing and they meet FDA standards. NEW ROC supplies APV heat exchanger gaskets replacements. We have now accumulated more than 40 types of APV PHE Gasket mold.

NEW ROC supplies high quality plate heat exchanger spares, including both gaskets and plates replacement for plate and frame heat exchanger or gasketed plate heat exchanger.

The gaskets and plates are specified to fit most plate heat exchanger makes and models for replacement.


### Standard Materials

For PHE gaskets, the standard materials are Nitrile rubber (NBR), EPDM and VITON. We also supply FDA gaskets for sanitary plate heat exchangers, plate pasteurizers.

APV Model List as below.



Models	A=mm	B=mm	Assembling Type
T4	318	70	Button Lock
H12	738	150	Button Lock
H17	800	150	Button Lock
SR1	490	130	Button Lock
SR2	700	180	Button Lock
SR3	1022	262	Button Lock
SR6GL	1256	314	Button Lock
SR9			Button Lock

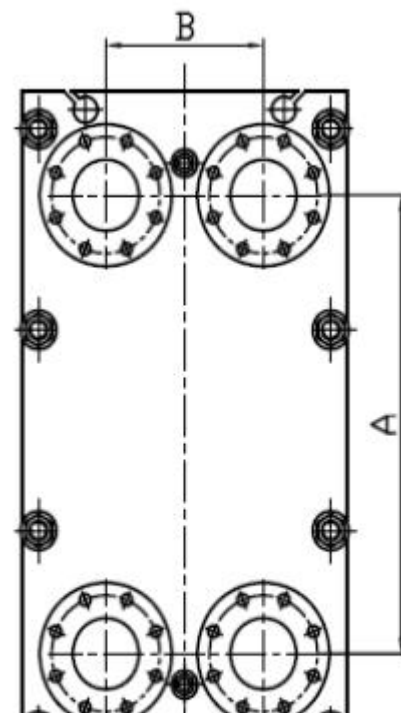

H12	620	150	Glue Type
H17	800	150	Glue Type Button Lock
N25	794	238	Button Lock
N35	1069	238	Button Lock
N50	1484	238	Button Lock
Q030D	722	310	Button Lock
Q030E	722	310	Button Lock
Q055D	1217	310	Button Lock
Q055E	1217	310	Button Lock
Q080	1757	310	Button Lock
K34	832	310	Glue Type
K55	1237	310	Glue Type
K71	1552	310	Glue Type
J060	915	465	Button Lock
J092	1290	465	Button Lock
J107	1478	465	Button Lock
J185	2415	465	Button Lock
M60	915	465	Glue Type
M92	1290	465	Glue Type
M107	1477.5	465	Glue Type
A055	1057	380	Button Lock
A085	1531	380	Button Lock
A145	2479	380	Button Lock

B063	1043	486	Button Lock
B110	1523	486	Button Lock
B134	1763	486	Button Lock
B158	2003	486	Button Lock

The materials we can provide and the color identification




The Basic Performance For Gasket				
Material	Color code	Max Use Temperature	Hardness	Application Media
NBR	1 line blue	120°C	76±2	alkane, alkane and other non-polar media, fuel oil and other mineral oil; lubricants; animal and vegetable oils; hot water, salt water, etc
NBR-HT	2 line blue	140	76±2	
HNBR	1 line red 1 line blue	150°C	76±2	
EPDM	1 line line yellow	150°C	80±2	Water, steam, atmospheric ozone, non-petroleum-based; ketone; alcohols polar medium;etc
HEPDM	1 line red 1 line yellow	170°C	80±2	
VITON A	1red	180°C	80±2	acid,alkali,organic solvent,hot oil
VITON A (OIL)	1 line gray 1 line red			
VITON B	2 line red			
VITON G	3 line red	200°C	80±2	strong acid,hot oil saturated steam hot oil
AFLAS	2 line purple	200°C	80±2	strong alkali,hot oil saturated steam hot oil
CR	1 line gray	-40~60°C	75±2	refrigerant





WWW.NEWROC-PHE.COM

**SUPERIOR**

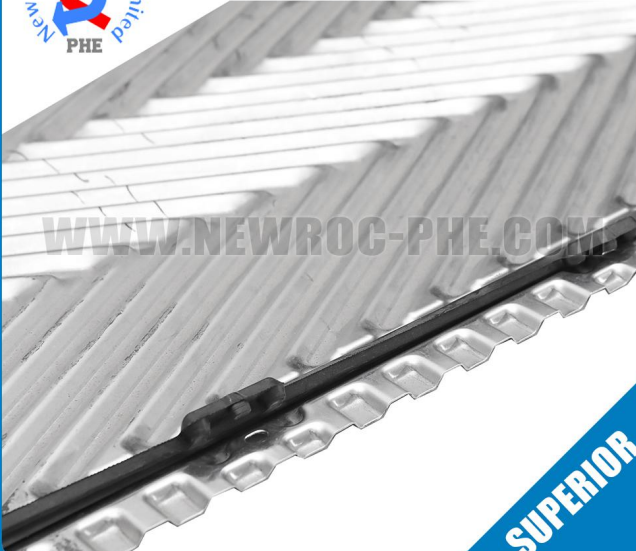WWW.NEWROC-PHE.COM

**SUPERIOR**





WWW.NEWROC-PHE.COM

**SUPERIOR**





WWW.NEWROC-PHE.COM

**SUPERIOR**