

Add: 10-2-101 Fenghexinyuan Nankai District Tianjin China
Tel:+86 22 87348386 Web:www.newroc-phe.com E-mail:info@newroc-phe.com

Perfect Replacement For Sondex Plate Heat Exchanger Gasket

Perfect product needs perfect material, strictly control the production and strict delivery inspection. We strictly enforce the requirements of ISO9000, and strictly control every aspect of production, so that each Gasket has can be traced back.

After years of efforts in the OEM and aftermarket we have now accumulated more than 400 types of PHE Gasket mold, and meet gasket EPDM, NBR, VITON manufacturing and they meet FDA standards.


NEW ROC supplies high quality plate heat exchanger spares, including both gaskets and plates replacement for plate and frame heat exchanger or gasketed plate heat exchanger.

The gaskets and plates are specified to fit most plate heat exchanger makes and models for replacement. Standard Materials

For PHE gaskets, the standard materials are Nitrile rubber (NBR), EPDM and VITON. We also supply FDA gaskets for sanitary plate heat exchangers, plate pasteurizers.

NEW ROC supplies Sondex heat exchanger gaskets replacements. we have now accumulated more than 40 types of Sondex PHE Gasket mold. Sondex Model List as below.

Models	A=mm	B=mm	Assembling Type
S4A	381	70	Hang on
S7A	394	126	Hang on
S8A	656	70	Hang on
S9A	381	192	Hang on
S14A	694	126	Hang on
S16B			Hang on
S17	800	150	Sonder lock
S18	800	150	Sonder lock
S19A	700	192	Hang on
S20A			Hang on
S21	719	225	Sonder lock

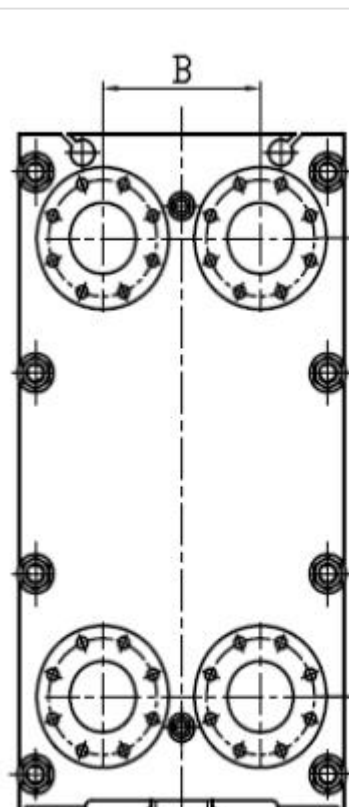

S21A	719	225	Hang on
S22	719	225	Sonder lock
S31A			Hang on
S37	1071	238	Sonder lock
S38	1441	238	Sonder lock
S41A	296	890	Hang on
S41	296	890	Sonder lock
S42	296	890	Sonder lock
S43	791	395	Sonder lock
S43B			Hang on
S44A			Hang on
S47	1365	225	Sonder lock
S47B			Hang on
S58			Sonder lock
S62	1292	296	Sonder lock
S63	1292	296	Sonder lock
S64	1771	225	Sonder lock
S65	1091	395	Sonder lock
S65B			Hang on
S81	1080	480	Sonder lock
S86			Sonder lock
S86B			Hang on
S100	1489	395	Sonder lock
S113	1527	448	Sonder lock
S121	1490	480	Sonder lock
S188	2120	480	Sonder lock
SW40			Glue type
SW40A			Hang on
SF25A			Hang on
SF123	1842	350	Glue type
SF160			Glue type

SW122			Glue type
SW189			Glue type

The materials we can provide and the color identification

The Basic Performance For Gasket				
Material	Color code	Max Use Temperature	Hardness	Application Media
NBR	1 line blue	120°C	76±2	alkane, alkane and other non-polar media, fuel oil and other mineral oil; lubricants; animal and vegetable oils; hot water, salt water, etc
NBR-HT	2 line blue	140	76±2	
HNBR	1 line red 1 line blue	150°C	76±2	
EPDM	1 line yellow	150°C	80±2	Water, steam, atmospheric ozone, non-petroleum-based; ketone; alcohols polar medium;etc
HEPDM	1 line red 1 line yellow	170°C	80±2	
VITON A	1 red	180°C	80±2	acid,alkali,organic solvent,hot oil
VITON A (OIL)	1 line gray 1 line red			
VITON B	2 line red			
VITON G	3 line red	200°C	80±2	strong acid,hot oil saturated steam hot oil
AFLAS	2 line purple	200°C	80±2	strong alkali,hot oil saturated steam hot oil
CR	1 line gray	-40~60°C	75±2	refrigerant