

Add: 10-2-101 Fenghexinyuan Nankai District Tianjin China  
Tel:+86 22 87348386 Web:www.newroc-phe.com E-mail:info@newroc-phe.com

## Perfect Replacement For Swep Plate Heat Exchanger Gasket

Perfect product needs perfect material, strictly control the production and strict delivery inspection. We strictly enforce the requirements of ISO9000, and strictly control every aspect of production, so that each Gasket has can be traced back.

After years of efforts in the OEM and aftermarket we have now accumulated more than 400 types of PHE Gasket mold, and meet gasket EPDM, NBR, VITON manufacturing and they meet FDA standards.

NEW ROC supplies high quality plate heat exchanger spares, including both gaskets and plates replacement for plate and frame heat exchanger or gasketed plate heat exchanger.


The gaskets and plates are specified to fit most plate heat exchanger makes and models for replacement.

### Standard Materials

For PHE gaskets, the standard materials are Nitrile rubber (NBR), EPDM and VITON. We also supply FDA gaskets for sanitary plate heat exchangers, plate pasteurizers.

NEW ROC supplies Swep heat exchanger gaskets replacements. we have now accumulated more than 20 types of Swep PHE Gasket mold. Swep Model List as below.

Models	A=mm	B=mm	Assembling Type
GC08	640	60	Glue Type
GLP8			
GX13	592	135	Glue Type
GL13	592	135	Glue Type
GC16	592	135	Glue Type
GX18	822	135	Glue Type
GC26	779	226	Glue Type

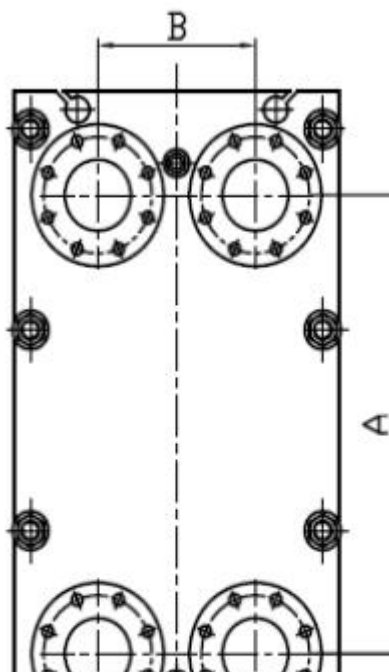

GX26	779	226	Glue Type
GX42	1189	226	Glue Type
GC51	1143	300	Glue Type
GX51	1143	300	Glue Type
GC60	910	420	Glue Type
GX60	910	420	Glue Type
GX64	1320	285	Glue Type
GX85	1140	574	Glue Type
GX91	1800	285	Glue Type
GX100	1490	420	Glue Type
GX118	2650	420	Glue Type
GX140	2070	420	Glue Type
GX145	1720	570	Glue Type
GL145	1720	570	Glue Type
GF187	2473	300	Glue Type

The materials we can provide and the color identification

The Basic Performance For Gasket				
Material	Color code	Max Use Temperature	Hardness	Application Media
NBR	1 line blue	120°C	76±2	alkane, alkane and other non-polar media, fuel oil and other mineral oil; lubricants; animal and vegetable oils; hot water, salt water, etc
NBR-HT	2 line blue	140	76±2	
HNBR	1 line red 1 line blue	150°C	76±2	

EPDM	1 line line yellow	150°C	80±2	Water, steam, atmospheric ozone, non-petroleum-based; ketone; alcohols polar medium;etc
HEPDM	1 line red 1 line yellow	170°C	80±2	
VITON A	1red	180°C	80±2	acid,alkali,organic solvent,hot oil
VITON A (OIL)	1 line gray 1 line red			
VITON B	2 line red			
VITON G	3 line red	200°C	80±2	strong acid,hot oil saturated steam hot oil
AFLAS	2 line purple	200°C	80±2	strong alkali,hot oil saturated steam hot oil
CR	1 line gray	-40~60°C	75±2	refrigerant