


8025-B




General Specifications (一般规格)

- ◆ Material:
Frame And Impeller: Thermal Plastic UL 94-0
- ◆ Lead Wires: UL Type
RED Wire Positive(+)
Black Wire Negative(-)
- ◆ Insulation Resistance: 10MΩ Or Over With a DC250V Megger
- ◆ Dielectric Withstand Voltage: AC500V 1S
- ◆ Allowable Ambient Temperature Range:
-10°C ~ +70°C (Operating)
-40°C ~ +70°C (Storage)

■ Dimensions Drawing(外观图)

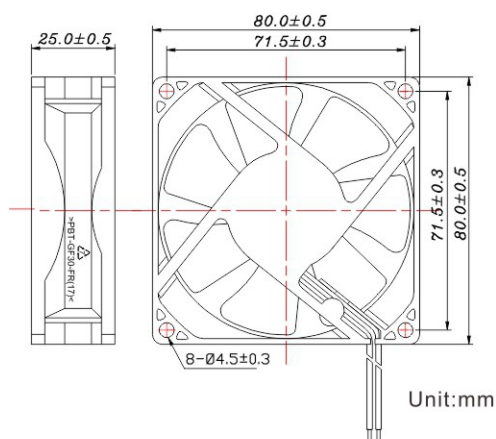

■ Characteristic Curves (特性曲线)

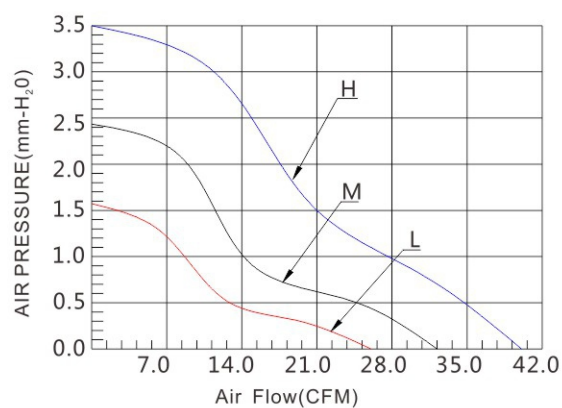

■ Specifications/规格

型号 Model	轴承类型 Bearing Type	电压 Rated Voltage	电压范围 Operation Voltage	电流 Current	转数 Speed	风量 Air Flow	风压 Static Pressure	噪音 Noise Level	重量 Weight
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	g
DFH8025S	Sleeve	12	10.8 ~ 13.2	0.17	3000	40.25	3.50	32.5	80
DFM8025S				0.11	2500	33.54	2.43	27.5	
DFL8025S				0.08	2000	26.83	1.56	22.7	
DFH8025B	Ball			0.17	3000	40.25	3.50	32.5	
DFM8025B				0.11	2500	33.54	2.43	27.5	
DFL8025B				0.08	2000	26.83	1.56	22.7	
DFH8025S	Sleeve	24	21.6 ~ 26.4	0.15	3000	40.25	3.50	32.5	
DFM8025S				0.10	2500	33.54	2.43	27.5	
DFL8025S				0.07	2000	26.83	1.56	22.7	
DFH8025B	Ball			0.15	3000	40.25	3.50	32.5	
DFM8025B				0.10	2500	33.54	2.43	27.5	
DFL8025B				0.07	2000	26.83	1.56	22.7	

Notes: 1. The parameters listed above are for reference. 2. Individual specification will be according to approval sheet provided or customers requirement.