

CVXJ(SF6) -24(V)/630-20


Inflatable cabinet circuit breaker
(with isolation with earthing)

Production description



VCB with easy to install, less fix, long life, small size, cheap, safe and reliable which meet with technical requirements for AC HV VCB of GB1984-89, GB/T1984-2003, Main circuit 630A-20KA(3s), mechanism life 10000 times, earthing circuit 20KA(2S), life is 2000 times

Name meaning

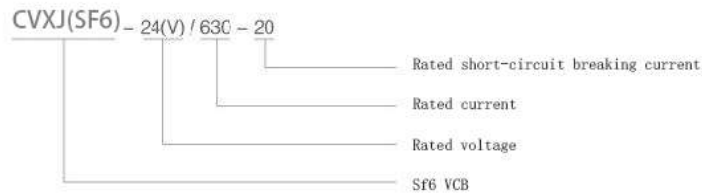

Environment condition

- Altitude: No more than 1000m, Shock degree not more than 8°
- Stain resistant degree: II
- Ambient temperature: -40°C-140°C, Relative humidity not more than 90%
- unapplicable place: Often severe shake place, apparent vapo, gas, salt, dusty, fire

Technical Parameters

Item	Unit	Parameters
Rated frequency	Hz	50
Rated current	A	630
Rated short-time withstand current	KA	20/25
Rated peak withstand current	KA	50
Rated short-circuit duration	S	4
Rated short-circuit on-off current	Time	50
Operate sequence		0-0.3s-180s-co

Shape and installation dimensions

