



KBT 12-Ports 2L4H Antenna

KB6KB65D0727A12-17D18F-I-W

Electrical Specifications					
Frequency Range (MHz)		2 × (690-960) (R1, R2)			
		690-792	792-880	880-960	
Polarization		±45			
Electrical Downtilt (°)		2-12, continuously adjustable			
Gain (dBi)	at mid Tilt	15.4	15.9	16.4	
	Over all tilts	15.3±0.9	15.8±0.9	16.3±0.9	
Side lobe suppression for first side lobe above main beam (dB)		>15	>15	>16	
Horizontal 3dB Beam Width (°)		65±5	62±4	63±6	
Vertical 3dB Beam Width (°)		11.1±0.9	10±0.9	8.9±0.5	
Cross-Polar Ratio, 0° (dB)		>20	>21	>21	
Front to Back Ratio, ±30° (dB)		>21	>22	>24	
Frequency Range (MHz)		4 × (1710-2690) (Y1, Y2, Y3, Y4)			
		1710-1880	1880-2170	2300-2490	2500-2690
Polarization		±45			
Electrical Downtilt (°)		2-12, continuously adjustable			
Gain (dBi)	at mid Tilt	17.1	17.5	17.9	18.4
	Over all tilts	16.9±0.5	17.4±0.5	17.7±0.5	18.3±0.5
Side lobe suppression for first side lobe above main beam (dB)		>14	>14	>14	>13
Horizontal 3dB Beam Width (°)		69±6	65±4	62±6	57±5
Vertical 3dB Beam Width (°)		7.3±0.5	6.5±0.5	5.5±0.5	5.1±0.3
Cross-Polar Ratio, 0° (dB)		>18	>21	>21	>21
Front to Back Ratio, ±30° (dB)		>22	>25	>24	>24
VSWR		≤ 1.5			
Intermodulation IM3 (dBc)		≤ -153 (2 x 43 dBm carrier)			
Cross Polar Isolation (dB)		≥25			
Interband isolation (dB)		≥25			
Max. power per port (W)		250 (R1, R2); 200 (Y1, Y2, Y3, Y4)			
Impedance (Ω)		50			
Grounding		DC Grounding			
Values based on NGMN recommendations on Base Station Antenna Standards V12.0(BASTA V12.0)					




KBT 12-Ports 2L4H Antenna

Mechanical Specifications

RET type	Integrated RET (AISG2.0/3GPP)
AISG Connectors (2 in 2 out)	4x8 pin (in: Male; out: Female)
Connector	12x4.3-10 Female, Bottom
Antenna dimensions (H x W x D)	1985 x 500 x 160
Packing dimensions (H x W x D) (mm)	2260 x 615 x 290
Antenna weight (kg)	33.8
Clamps weight (kg)	6.8
Radome material	Fiberglass
Radome color	Light grey
Operational temperature (°C)	-40 to +65
Wind load at 42m/s (N)	1480/ 364/ 1480 (Frontal/ Lateral/ Rearal)
Max. operational wind speed (km/h)	200


Layout and Pattern

Connector Position:

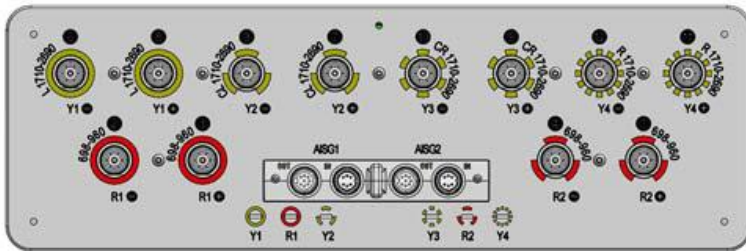


R1/R2: 690-960MHz;
 Y1/Y2/Y3/Y4: 1710-2690MHz;

Configuration Types:

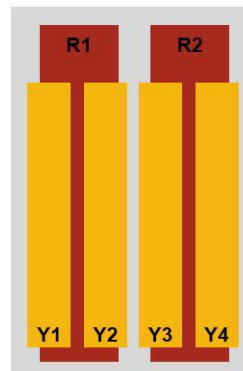


RET S/N:
 KBxxx-R1-xx.....;
 KBxxx-R2-xx.....;
 KBxxx-Y1-xx.....;
 KBxxx-Y2-xx.....;
 KBxxx-Y3-xx.....;
 KBxxx-Y4-xx.....;

Pattern sample for reference:



R1/R2:690-960MHz



Y1/Y2/Y3/Y4:1695-2690MHz