

GFQ-0638-4310F-W Power Splitter Series

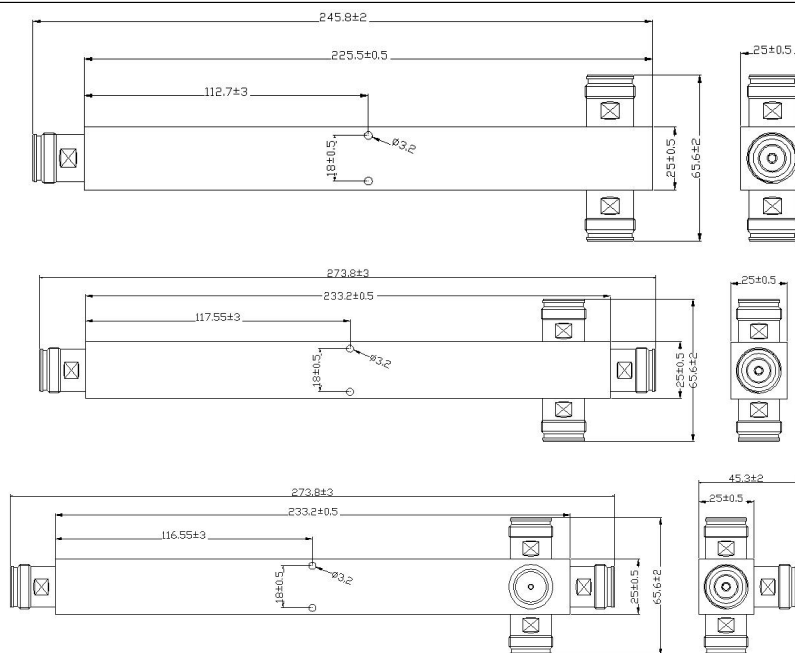
Technical Sheet

Main Features

- Wide Frequency Band 617-3800MHz
- 2G/3G/4G/5G/LTE Coverage
- Low Passive Intermodulation(-155/-161dBc)
- Low VSWR & Insertion Loss
- High Isolation, Indoor & Outdoor
- Widely used for In-building Solutions

Technical Specifications

Model	GFQ-2-0638-4310F-W	GFQ-3-0638-4310F-W	GFQ-4-0638-4310F-W
Freq-MHz	600-3800		
Split Loss-dB	3.0	4.9	6.2
Insertion Loss-dB	≤0.3		
VSWR	≤1.3	≤ 1.35 @617-698MHz ≤ 1.3 @698-3800MHz	≤ 1.35 @617-698MHz ≤ 1.3 @698-3800MHz
PIM-dBc	≤-155@2*43dBm/≤-161@2*43dBm		
Power-W	300		
Impedance-Ω	50		
Connector	4.3-10 female		
Color	Black		
Temp(deg)	-30~+70		
Application	Indoor or Outdoor, IP65		

**KBT**

Add: No.30 Dongyang 3rd Road, Danzao Town, Nanhai District, Foshan City, Guangdong, China 528216
Tel: +86-757-88022860 Email: kbt@kenbotong.com Web: <http://www.kenbotong.com>