

GFQ-0735-4310F-W Power Splitter Series


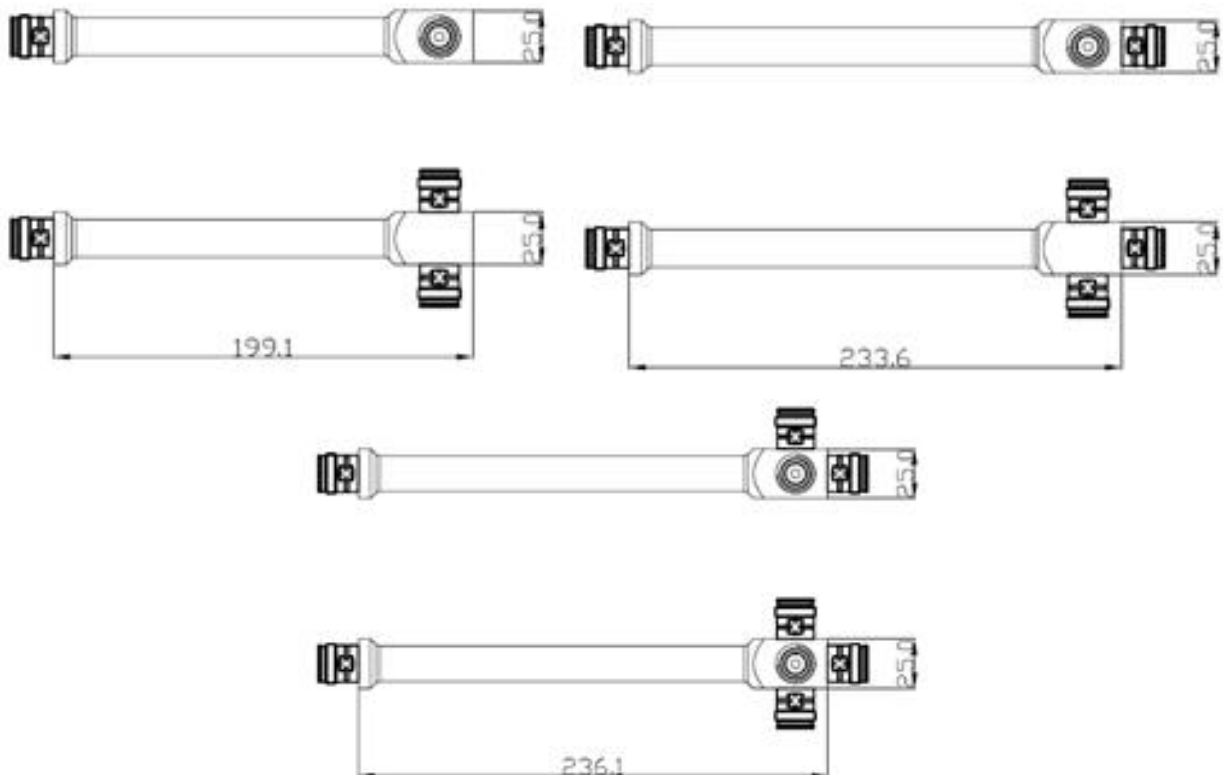
Technical Sheet

Main Features

- Wide Frequency Band 690-3800MHz
- VHF Coverage
- Low VSWR & Insertion Loss
- Widely used for In-building Solutions

Technical Specifications

Model	GFQ-2-0735-500-4310F-W	GFQ-3-0735-500-4310F-W	GFQ-4-0735-500-4310F-W
Freq-MHz	690-3800		
Output Ports	2-way	3-way	4-way
Insertion Loss-dB	≤3.3	≤5.3	≤6.6
VSWR	1.25	1.25	1.30
Power Capacity-W	500(average)		
Impedance-Ω	50		
Connector	4.3-10 female		
Temp(deg)	-25~+65		
Application	IP65		
Weight (including	0.21	0.25	0.29
Dimension (excluding	199.1 x 25 x 25	233.6 x 25 x 25	236.1 x 25 x 25

**KBT**

Add: No.30 Dongyang 3rd Road, Danzao Town, Nanhai District, Foshan City, Guangdong, China 528216
Tel: +86-757-88022860 Email: kbt@kenbotong.com Web: <http://www.kenbotong.com>