

GFQ-0738A-4310F-W Power Splitter Series


Technical Sheet

Main Features

- Wide Frequency Band 690-3800MHz
- 2G/3G/4G/5G/LTE Coverage
- Low Passive Intermodulation(-160dBc)
- Low VSWR & Insertion Loss
- Widely used for In-building Solutions

Technical Specifications

Model	GFQ-2-0738A-4310F-W	GFQ-3-0738A-4310F-W	GFQ-4-0738A-4310F-W
Freq-MHz	690-3800		
Output Ports	2-way	3-way	4-way
Insertion Loss-dB	3	4.8	6
IL(dB)	≤0.4	≤0.6	≤0.6
VSWR	≤1.25	≤1.25	≤1.3
PIM-dBc	≤-160@2*43dBm		
Power Capacity-W	500(average)		
Impedance-Ω	50		
Connector	4.3-10 female		
Color	Black		
Temp(deg)	-35~+60		
Application	Indoor & Outdoor IP65		

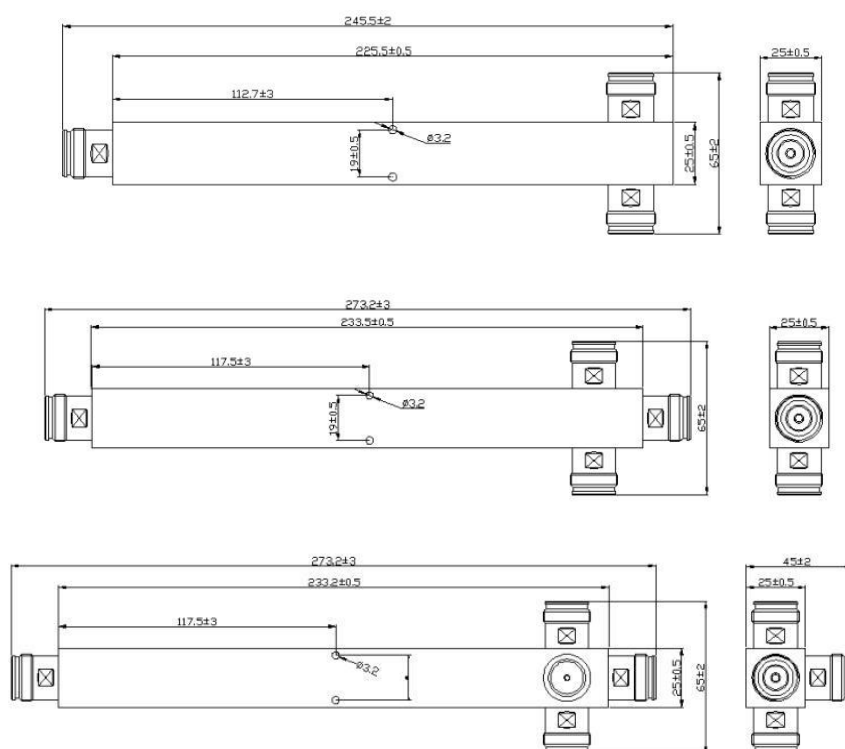

KBT

Add: No.30 Dongyang 3rd Road, Danzao Town, Nanhai District, Foshan City, Guangdong, China 528216
Tel: +86-757-88022860 Email: kbt@kenbotong.com Web: <http://www.kenbotong.com>