

HHQ-3-0735A-500-4310F-W 2*2 Hybrid Combiner



Technical Sheet

Main Features

- Low insertion loss, low VSWR
- High isolation
- Low Passive Intermodulation

Technical Specifications

Electrical Specifications	
Frequency (MHz)	690-3800
Insertion Loss (dB)	≤3.5
Isolation (dB)	≥25
VSWR	≤1.25
Impedance (Ω)	50
Max. power (W)	500
Intermodulation (3rd order) (dBc)	≤-155@2 x 43 dBm
Mechanical Specifications	
Connectors type	4 x 4.3-10 Female
Weight (including connectors and mounting bracket) (kg)	0.5
Dimension (excluding connectors and mounting bracket) (mm)	133.5 x 42.6 x 29.5
Environmental Specifications	
Operating temperature (°C)	-25 to +60
Relative humidity	≤95%
Applications	IP65

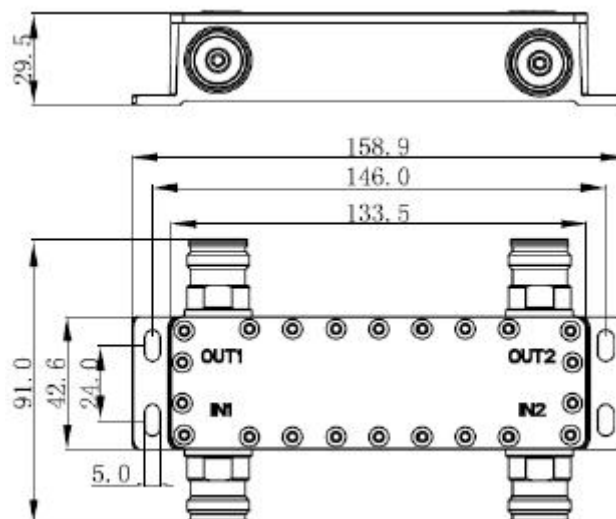

KBT

Add: No.30 Dongyang 3rd Road, Danzao Town, Nanhai District, Foshan City, Guangdong, China 528216
Tel: +86-757-88022860 Email: kbt@kenbotong.com Web: <http://www.kenbotong.com>