

HL-3F-100-0638-4310F -W Diplexer

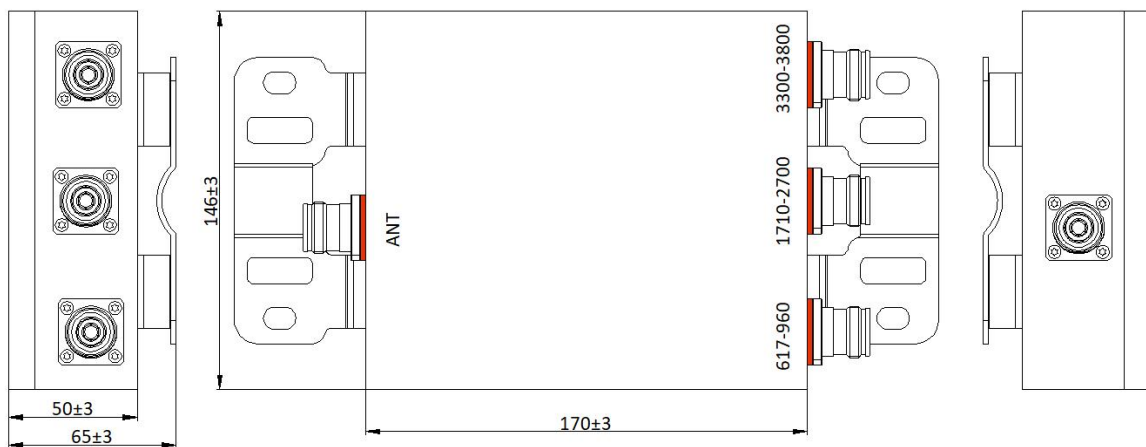
Technical Sheet

Main Features

- Wide Frequency Band
- 2G/3G/4G/5G Coverage
- Low Passive Intermodulation(-160dBc)
- Low VSWR & Insertion Loss
- Widely used for In-building Solutions

Technical Specifications

Model	HL-3F-100-0638-4310F -W		
Freq-MHz	CH1:617-960	CH2:1710-2700	CH3:3300-3800
Insertion loss-dB	≤ 0.5		
Rejection -dB	≥ 50		
VSWR	≤ 1.3		
PIM-dBc	$\leq -160@2*43dBm$		
Average Power-W	100		
Impedance- Ω	50		
Connector	4.3-10 Female		
Temp(deg)	$-10 \sim +65$		
Humidity	0%-95%		
Applications	IP65		
Relative humidity	5% - 95%		

**KBT**

Add: No.30 Dongyang 3rd Road, Danzao Town, Nanhai District, Foshan City, Guangdong, China 528216
Tel: +86-757-88022860 Email: kbt@kenbotong.com Web: <http://www.kenbotong.com>