

HL-4F-100-0638-4310F -W Diplexer

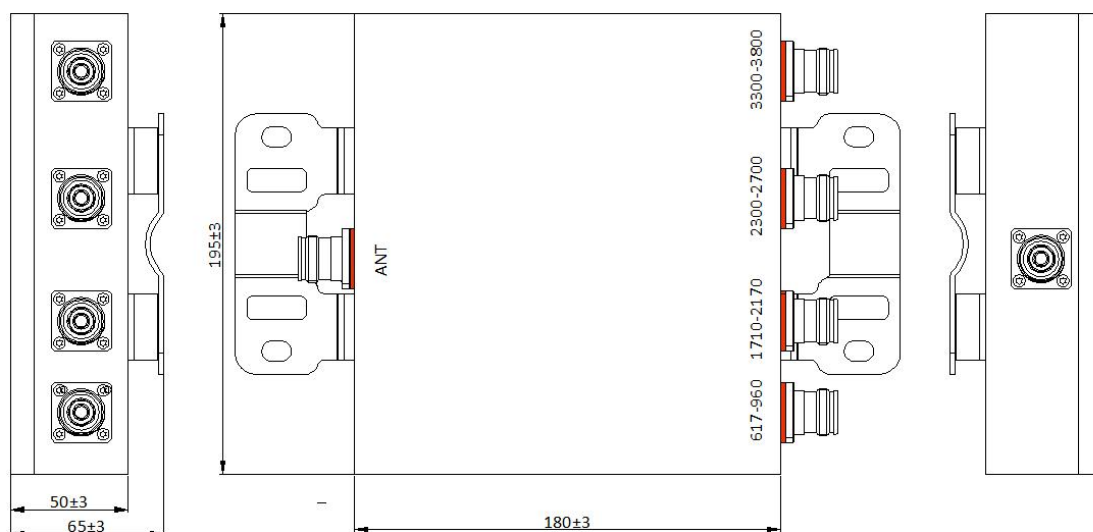
Technical Sheet

Main Features

- Wide Frequency Band
- 2G/3G/4G/5G Coverage
- Low Passive Intermodulation(-160dBc)
- Low VSWR & Insertion Loss
- Widely used for In-building Solutions

Technical Specifications

Model	HL-4F-100-0638-4310F -W			
Freq-MHz	CH1:617-960	CH2:1710-2170	CH3:2300-2700	CH4:3300-3800
Insertion loss-dB	≤ 0.5			
Rejection -dB	≥ 50			
VSWR	≤ 1.3			
PIM-dBc	$\leq -160@2*43dBm$			
Average Power-W	100			
Impedance- Ω	50			
Connector	4.3-10 Female			
Temp(deg)	$-10 \sim +65$			
Humidity	0%-95%			
Applications	IP65			
Relative humidity	5% - 95%			

**KBT**

Add: No.30 Dongyang 3rd Road, Danzao Town, Nanhai District, Foshan City, Guangdong, China 528216
Tel: +86-757-88022860 Email: kbt@kenbotong.com Web: <http://www.kenbotong.com>