





<b>2× Wide-band Panel</b>	<b>1710~2690</b>	<b>1710~2690</b>
<b>Dual Polarization</b>	<b>X</b>	<b>X</b>
<b>Half-power Beam Width</b>	<b>65°</b>	<b>65°</b>
<b>Variable Electrical Downtilt</b>	<b>0°-12°</b>	<b>0°-12°</b>

1710~2690MHz 65° 17.5/17.5dBi 0° -12° /0° -12° Tilt


Electrical specifications	KBT65DP1818-1727AE			
Frequency range (MHz)	1710~1990	1920~2200	2200~2490	2490~2690
Polarization	±45°			
Gain (dBi)	4×16.8	4×17	4×17.4	4×17.2
Electrical Downtilt (°)	0~12			
Half-power beam width (°)	Horizontal:68 Vertical:7.5	Horizontal:65 Vertical:7	Horizontal:62 Vertical:6.5	Horizontal:60 Vertical:6
Sidlobe suppression for first sidlobe above main beam (dB)	0°...5°...12° 15...15...14			
Front-to-back ratio (dB)	≥25			
Cross-polar discrimination (dB)	≥15(±60° ≥10)			
Isolation (dB)	≥28			
Impedance (Ω)	50			
VSWR	≤1.5			
Intermodulation IM3 (2×43dBm carrier)	≤-150dBc			
Maximum power (W)	300			
Lighting protection	DC Ground			

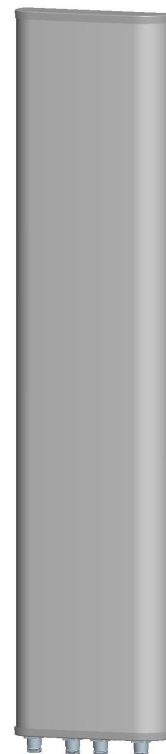


Mechanical specifications	
Connector	4×7/16DIN Female
Connector position	Bottom
Height/width/depth (mm)	1400×320×110
Packing size (mm)	1680×420×250
Weight (kg)	18
Radome material	UPVC
Radome color	Gray
Mechanical tilt (°)	0~15
Operating temperature (°C)	-40~60
Rated wind velocity (m/s)	60
Suitable pole diameter (mm)	50~115
Mounting kit	JM-900CZ
Electrical downtilt adjustment	Manual or by optional RCU

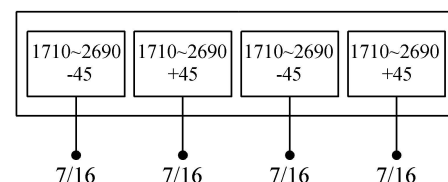


1710~1990MHz: ±45° Pol.



1920~2200MHz: ±45° Pol.



2200~2490MHz: ±45° Pol.



2490~2690MHz: ±45° Pol.

