

**KBT****2400-2500/5150-5950/6000-7125MHz 6/6/6dBi
Directional Antenna****KDP8-V2470J6BFE****Application**

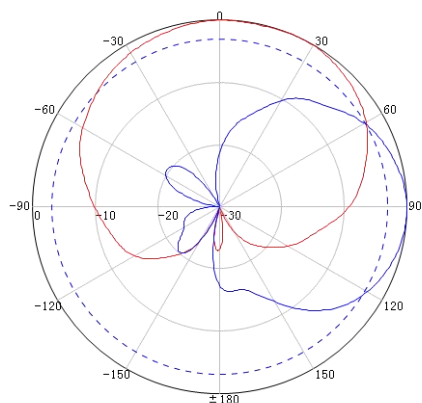
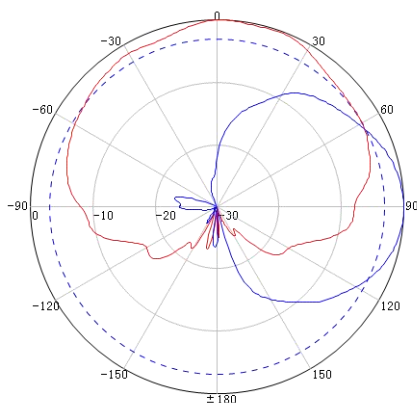
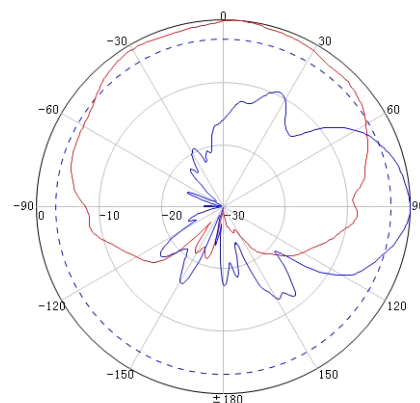
Used in WLAN network system

Electrical specifications

Frequency range (MHz)	2400-2500	5150-5950	6000-7125
Polarization	Vertical		
Gain (dBi)	6	6	6
Electrical Downtilt (°)	0		
Horizontal Half-power beam width (°)	100	120	120
Vertical Half-power beam width (°)	70	60	45
Front-to-back ratio (dB)	≥15	≥15	≥15
Isolation (dB)	≥18	≥25	≥25
Impedance (Ω)	50		
VSWR	≤2.0		
Maximum power (W)	50		

Mechanical specifications

Connector	8*RP-TNC Male
Connector position	Bottom
Exposed cable size (cm)	92±2
Height/Width/Depth (mm)	290*170*50
Antenna Weight (kg)	1.1
Radome Material	ABS
Radome Color	White
Mechanical Tilt(°)	-30~+30
Operating Temperature (°C)	-40~+65
Mounting Options	Pole or Wall Mounting
Rated Wind Velocity (m/s)	40
Suitable Pole Diameter (mm)	Φ30-Φ50
Mounting Kit	JM-R3

Radiation pattern**2400~2500MHz****5150~5950MHz****6000~7125MHz**

Add: No.30 Dongyang 3rd Road, Danzao Town, Nanhai District, Foshan City, Guangdong, China 528216

Tel: +86-757-88022860

Email: kbt@kenbotong.com

Web: <http://www.kenbotong.com>



KBT

2400-2500/5150-5950/6000-7125MHz 6/6/6dBi
Directional Antenna

Appearance

Product Picture



Installation Sketch

