



KL-100-DC4G-4310F-W

- Wide Frequency Band DC-4000MHz
- UHF/VHF/2G/3G/4G/5G/LTE Coverage
- Low VSWR
- Widely used for In-building Solutions

Electrical Specifications	
Frequency (MHz)	DC-4000
VSWR	≤ 1.25
Impedance (Ω)	50
Max. power (W)	100
Intermodulation (3rd order) (dBc)	$\leq -155@2 \times 43 \text{ dBm}$
Mechanical Specifications	
Connectors type	1 x 4.3-10 Female
Weight (including connectors and mounting bracket) (kg)	2.3
Dimension (excluding connectors and mounting bracket) (mm)	176 x 145 x 67
Environmental Specifications	
Operating temperature ($^{\circ}\text{C}$)	-40 to +65
Relative humidity	$\leq 95\%$
Applications	IP65

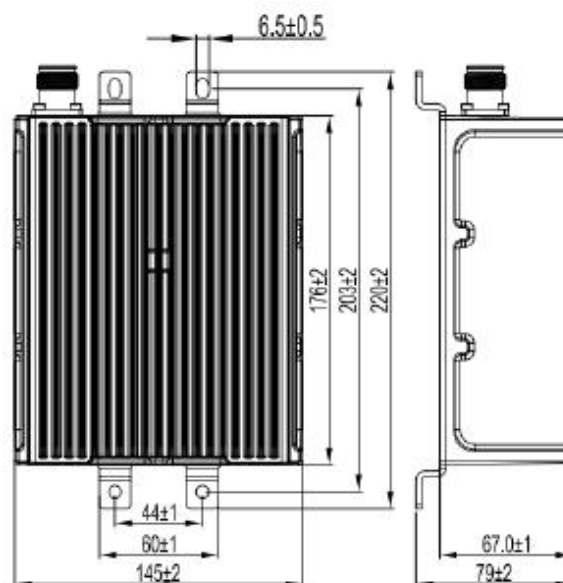

KBT

Add: No.30 Dongyang 3rd Road, Danzao Town, Nanhai District, Foshan City, Guangdong, China 528216
Tel: +86-757-88022860 Email: kbt@kenbotong.com Web: <http://www.kenbotong.com>