


# KL-200-DC35-NM-W

- 200W Load, frequency covers DC-3700 MHz.
- Designed as 50 Ohm termination for terminating open ports on RF equipment.
- Suitable for indoor applications.
- Connectors type is customizable.

Electrical Specifications	
Frequency (MHz)	DC-3700
VSWR	$\leq 1.25$
Impedance ( $\Omega$ )	50
Max. power (W)	100
Mechanical Specifications	
Connectors type	1 x N Male
Dimension (excluding connectors and mounting bracket) (mm)	120 x 100 x 62
Environmental Specifications	
Operating temperature ( $^{\circ}\text{C}$ )	-10 to +40
Relative humidity	$\leq 95\%$
Applications	Indoor

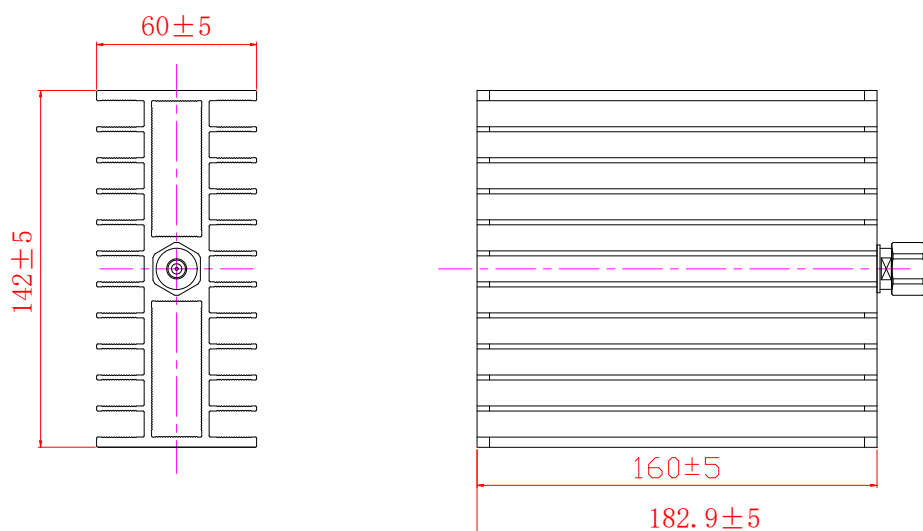

**KBT**

Add: No.30 Dongyang 3rd Road, Danzao Town, Nanhai District, Foshan City, Guangdong, China 528216  
Tel: +86-757-88022860 Email: kbt@kenbotong.com Web: <http://www.kenbotong.com>