


# KL-200-DC4G-4310F-W

- Wide Frequency Band DC-4000MHz
- UHF/VHF/2G/3G/4G/5G/LTE Coverage
- Low VSWR
- Widely used for In-building Solutions

| Electrical Specifications                                  |                                     |
|--|-------------------------------------|
| Frequency (MHz)  | DC-4000                             |
| VSWR   | $\leq 1.25$                         |
| Impedance ( $\Omega$ )                                     | 50                                  |
| Max. power (W)   | 200                                 |
| Intermodulation (3rd order) (dBc)                          | $\leq -155@2 \times 43 \text{ dBm}$ |
| Mechanical Specifications                                  |                                     |
| Connectors type  | 1 x 4.3-10 Female                   |
| Weight (including connectors and mounting bracket) (kg)    | 3.7                                 |
| Dimension (excluding connectors and mounting bracket) (mm) | 176 x 176 x 98                      |
| Environmental Specifications                               |                                     |
| Operating temperature ( $^{\circ}\text{C}$ )               | -40 to +65                          |
| Relative humidity  | $\leq 95\%$                         |
| Applications   | IP65                                |

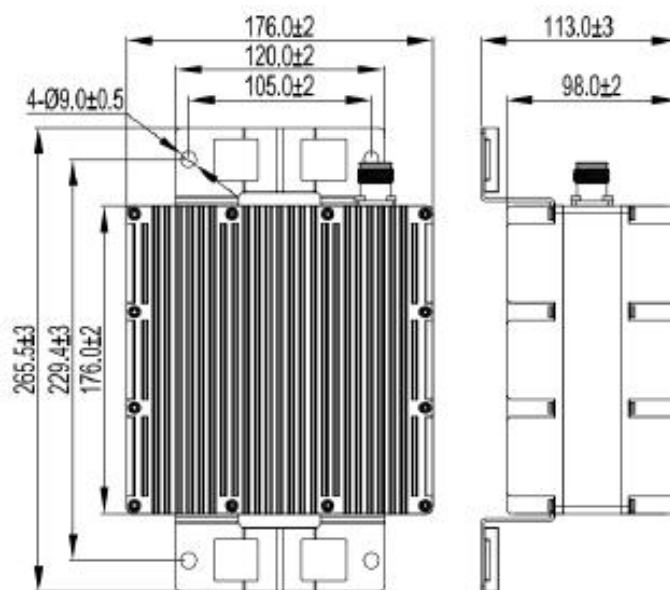

**KBT**

Add: No.30 Dongyang 3rd Road, Danzao Town, Nanhai District, Foshan City, Guangdong, China 528216  
Tel: +86-757-88022860 Email: kbt@kenbotong.com Web: <http://www.kenbotong.com>