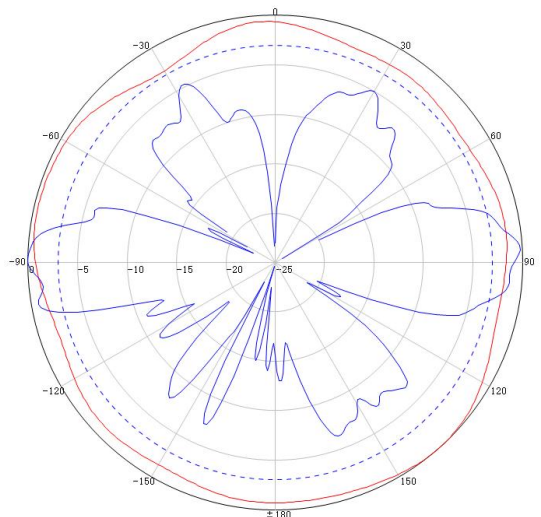
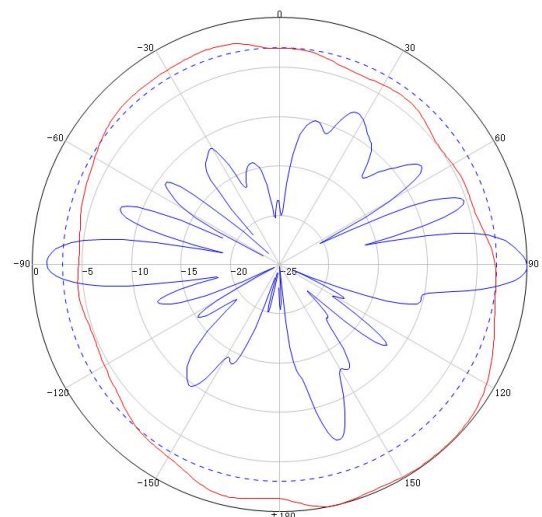


# 1-Port Fiberglass Omnidirectional Antenna

- 2400~2500/5150~5850 MHz
- 6~8dBi / 360° / Vertical
- Small size, high gain

## KOP-2458G8F20

Electrical Specifications		
Frequency Range (MHz)	2400~2500	5150~5850
Polarization	Vertical	
Typical Gain (dBi)	6	8
Typical Horizontal Beam Width (°)	360	
Typical Vertical Beam Width (°)	25	15
Impedance (Ω)	50	
VSWR	≤2.0	
Maximum Power (W)	50	
Mechanical Specifications		
Connector	1*N Male or 1*N Female	
Connector Position	Bottom	
Antenna Size (mm)	Φ19.6*300(±5)	
Weight (g)	120(±5)	
Radome Material	Fiberglass	
Radome Color	Gray	
Operating Humidity (%)	5~95	
Operating Temperature (°C)	-45~70	
Application	Outdoor	
Mounting	Equipment installation	
Typical Pattern		
 <p>2400~2500MHz</p>	 <p>5150~5850MHz</p>	

# 1-Port Fiberglass Omnidirectional Antenna

- 2400~2500/5150~5850 MHz
- 6~8dBi / 360° / Vertical
- Small size, high gain

## Product Information



## Installation Sketch

