
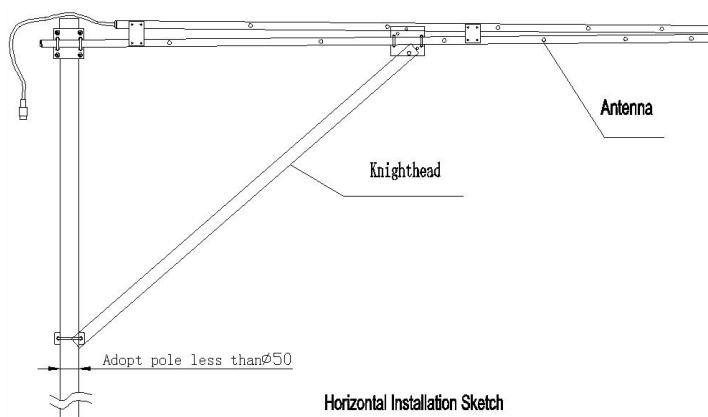


# TDJ-0204DS Directional Antenna

## Features

- Broad band, low VSWR
- High gain, high F/B Ratio
- Long-distance communication, strong anti-jamming ability
- High quality aluminum alloy material
- Strong adaptability of environment
- The connector with a low loss cable
- Suitable for detecting system of environment, remote sensing & telemetry system or video communications system etc.

Model	TDJ-0204DS
Freq. Range (MHz)	225 to 400
Beamwidth(degree)	E:50 H:65
Gain (dBi)	9.5
VSWR	≤2.0
Polarization	Vertical or Horizontal
Max.Power (W)	200
Impedance (Ω)	50
Connector	N female or customized
cable (m)	2 or customized
Weight (Kg)	1. 46
Dimensions (cm)	180*70*6
Antenna Color	Aluminum alloy primitive colors or black
Mast Diameter-mm	40 to 50

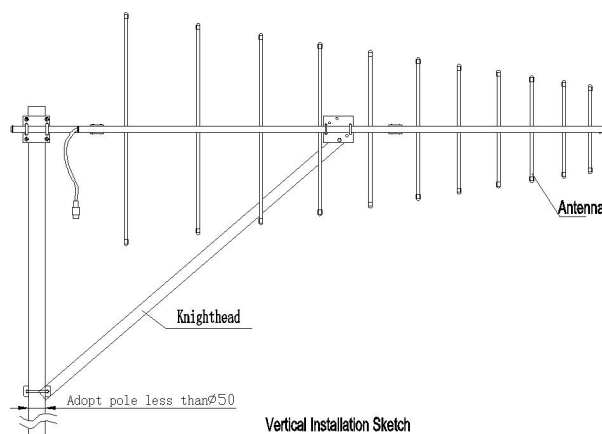

1. Install as figure, polarization is chosen as needed, fix the antenna on the mounting mast;
2. Adjust the antenna azimuth to maximize the signal, tighten all the screws, and then waterproof the connector.



**KENBOTONG TECHNOLOGY CO., LTD.**

Addr : NO.2 Chanxiu Road ,Foshan city,Guangdong China

Code: 528061

Tel: 86(757)8202-5597, 8221-9788

Fax : 86(757)8221-2072,8802-2808

Email: kbt@kenbotong.com

web: <http://www.kenbotong.com>