

**KBT****3300~4000MHz 65° 12dBi
MIMO Directional Panel Antenna****TDJ-X3740BFN****Application**

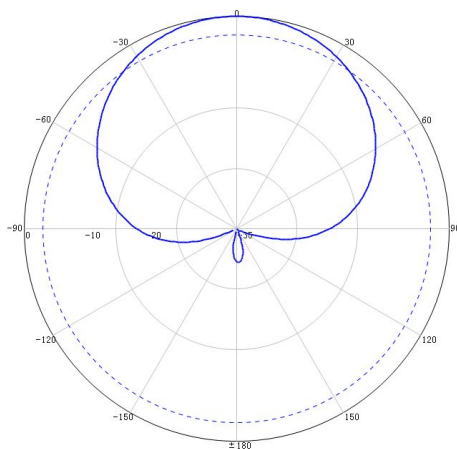
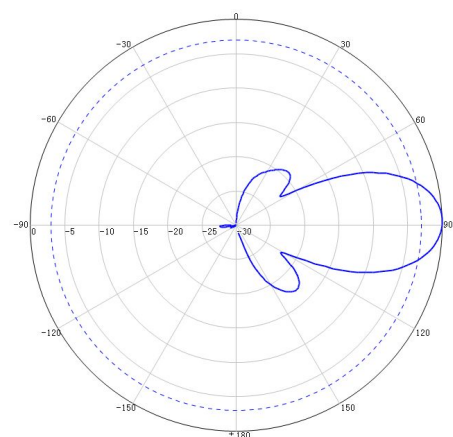
Used in 5G system

Electrical specifications

Frequency range (MHz)	3300~4000
Polarization	±45°
Gain (dBi)	12±1
Horizontal beam width (°)	65±10
Vertical beam width (°)	35±10
Front-to-back ratio (dB)	≥20
Isolation (dB)	≥20
Impedance (Ω)	50
VSWR	≤2.0
Maximum power (W)	50
Lighting protection	DC Ground

Mechanical specifications

Connector	2* N Female or Customized
Connector position	Bottom
Exposed cable size (cm)	35 or Customized
Height/width/depth (mm)	210*120*42
Packing size (mm)	244*128*78
Weight (kg)	0.35
Radome material	ABS
Radome color	White
Operating temperature (°C)	-40~60
Application	Indoor
Mounting Style	Wall mount

3300~4000MHz: ±45° Horizontal Pol.**3300~4000MHz: ±45° Vertical Pol.**



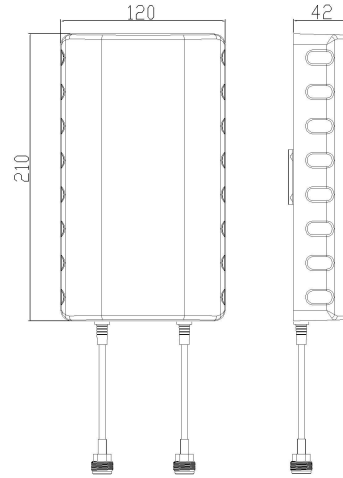
KBT

3300~4000MHz 65° 12dBi
MIMO Directional Panel Antenna

Product pictures



Product size



Installation Sketch

