

**KBT****600-6000MHz 2 dBi Mobile Antenna****TQC-0660CA2****Application**

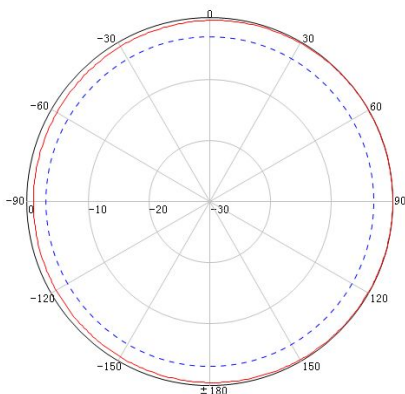
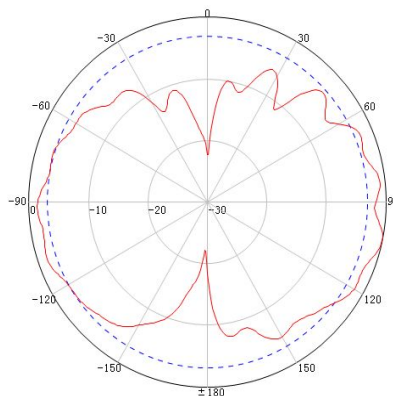
Used in 4G/5G system

Electrical Specifications

Frequency Range (MHz)	600-960	1710-6000
Polarization	Vertical	
Gain (dBi)	2±1	2.5±1
Horizontal Beam Width (°)	360	
Vertical Weam Width (°)	70±20	30±15
Impedance (Ω)	50	
VSWR	≤2.5	
Maximum Power (W)	50	

Mechanical Specifications

Connector	SMA Male	
Connector Position	Cable Terminal	
Cable Length (m)	3	
Diameter / Height (mm)	φ30* (106±5)	
Weight (Kg)	0.06	
Radome Material	Rubber	
Radome Color	Black	
Relative Humidity(%)	5-95	
Operating Temperature (°C)	-40-+65	
Rated wind Velocity (m/s)	60	
Application	Outdoor	
Mounting Kit	Magnet	

H PLANE**E PLANE****Product Picture**