

TQJ-0727XDQ-M

Indoor Ceiling Mount Antenna

Technical Sheet



Note: The picture is for reference only, please kindly consult with the real product.

Applications

- GSM/CDMA/PCS/3G/WLAN/WiMAX/LTE
- 698 to 960/1710 to 2700MHz band
- TDD/FDD -LTE
- Indoor omni-directional coverage


Features

- 698~960/1710~2700MHz Band
- Broad Band ;Low VSWR
- Support current main popular communication system
- ABS Radome
- Ceiling mount,easy to install

Specifications

Model	TQJ-0727XDQ-M		
Freq.Range-MHz	698-806	806-960	1710-2700
Gain-dBi	2		5
VSWR	≤2.0	≤1.5	
Ver.Beamwidth-°	85±15		55±15
Impedance-Ω	50		
Polarization	Vertical		
Max.Power-W	50		
IM3-dBm(2@33dBm)	≤-107		
Connector Place	Bottom		
Connector	N female or customized		
Dimensions-mm	Φ187×85		
Weight-Kg	0.4		
Mounting	Fixed with nut		
Note: The antenna is suitable for wooden or plaster ceiling; other ceiling should be customized.			

Installation Sketch

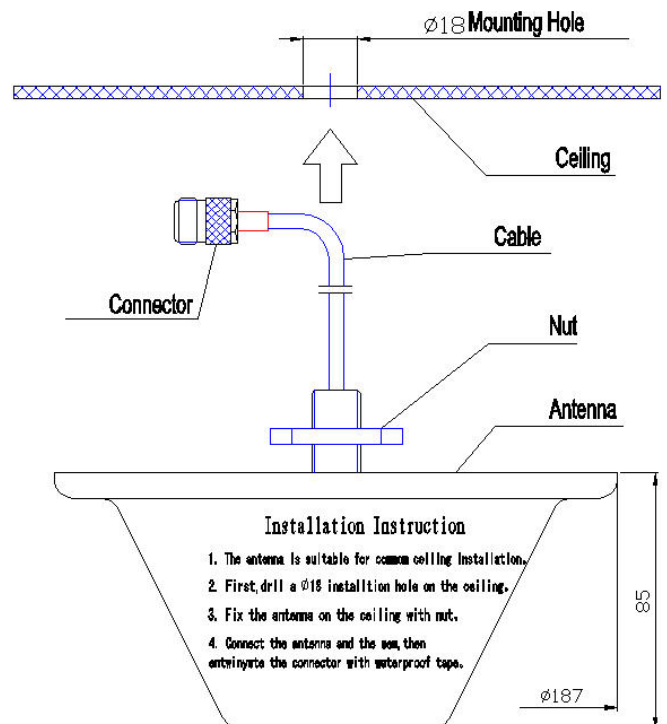

Kenbotong Technology Co., Ltd.

Addr : NO.2 Chanxiu Road ,Foshan city,Guangdong China Code:528061
 Tel: 86(757)8202-5597, 8221-9788 Fax : 86(757)8221-2072,8802-2808
 Email: kbt@kenbotong.com web: <http://www.kenbotong.com>