TQJ-1800A10

Fiberglass Omni Antenna

Technical Sheet

Applications

- 1.8GHz Band
- GSM1800MHz System
- Community Coverage
- Point to Multipoint

Features

- Low VSWR
- High Quality Fiberglass Radome
- Supplied with mounting kits
- Mast mounting
- Integral N-Female connector

E Plane



H Plane



Specifications

Model	TQJ-1800A10
Freq.Range-MHz	1710～1880
Bandwidth-MHz	170
Gain-dBi	10
Ver.Beamwidth-°	10.5
VSWR	≤1.5
Impedance-Ω	50
Polarization	Vertical
Max.Power-W	300
Connector	N Female
Dimension-mm	ϕ36×1200
Mounting way	Mast
Mast Diameter-mm	ϕ35～ϕ50
Weight-g	700
Rated Wind Velocity-m/s	60

Installation Sketch

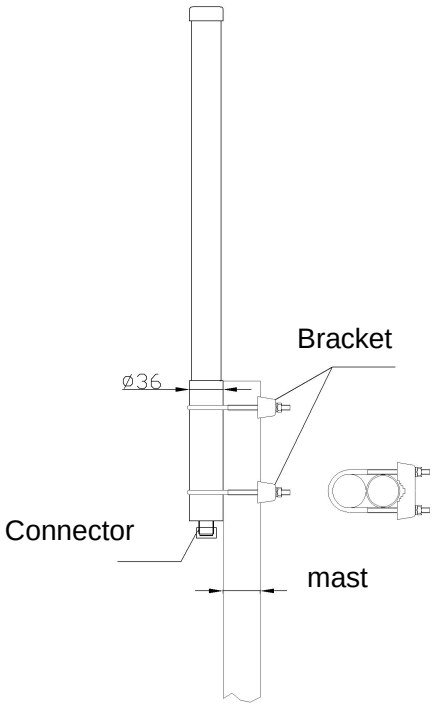

Kenbotong Technology Co., Ltd.

Addr :NO.2 Chanxiu Road ,Foshan city,Guangdong China Code:528061
Tel: 86(757)8202-5597, 8221-9788 Fax : 86(757)8221-2072,8802-2808
Email: kbt@kenbotong.com web: http://www.kenbotong.com