KBT

617～960/1710～2700/3300～3800/4900～6000MHz 4/5/6/6dBi MIMO Omnidirectional Ceiling Antenna

TQJ-D0660XDZ-M

Application

Used in 2G/3G/4G/5G/WLAN system

Electrical specifications

Frequency range (MHz)	617～960	1710～2700	3300～3800	4900-6000
Polarization	2*Linear			
Maximum Gain (dBi)	4	5	6	6
Horizontal beam width (°)	360			
Vertical beam width (°)（Typical values）	80	50	40	50
Isolation (dB)	≥16	≥20	≥25	≥20
Impedance (Ω)	50			
VSWR	≤2.0	≤1.8		
Intermodulation IM3 (2×43dBm carrier)	≤-150 dBc			/
Maximum power (W)	50			
Lighting protection	DC Ground			

Mechanical specifications

Connector	2*4.3-10 Female or customer requirement
Connector position	Bottom
Exposed cable size (cm)	30(or customer requirement)
Height/width/depth (mm)	Φ207*56
Packing size (mm)	213*168*204
Weight (kg)	0.6
Radome material	ABS
Radome color	White
Operating temperature (℃)	-40～60
Application	Indoor
Mounting	Nut

617～960MHz Typical pattern:

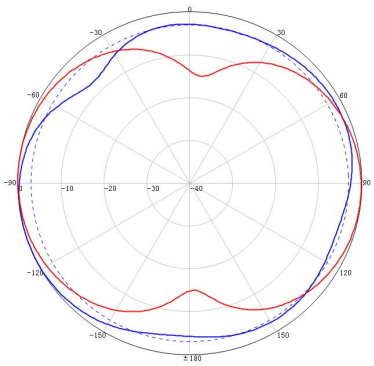

1710～2700MHz Typical pattern:

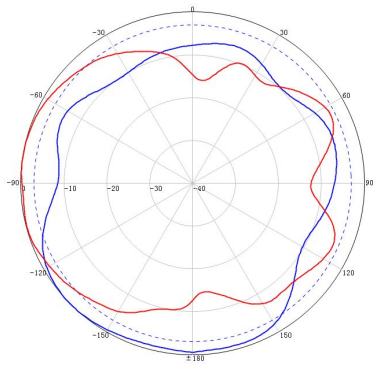

3300～6000MHz Typical pattern:

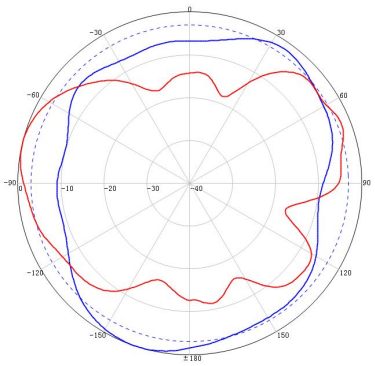

Kenbotong reserves the right to change specifications without prior notice.

No.2 ChanxiuRoad, Foshan, Guangdong, China. 528061 Tel: +86-757-82219788 Fax: +86-757-82212072

Email: kbt@kenbotong.com Web: http://www.kenbotong.com

KBT

617～960/1710～2700/3300～3800/4900～6000MHz 4/5/6/6dBi MIMO Omnidirectional Ceiling Antenna

Product pictures

Product size

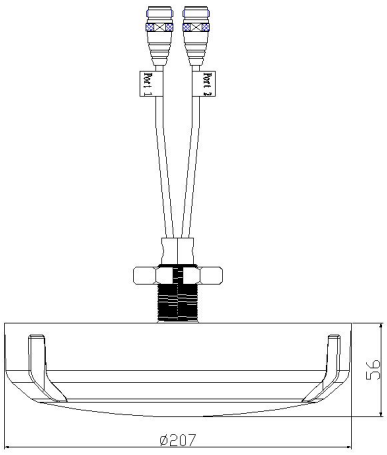

Installation Sketch

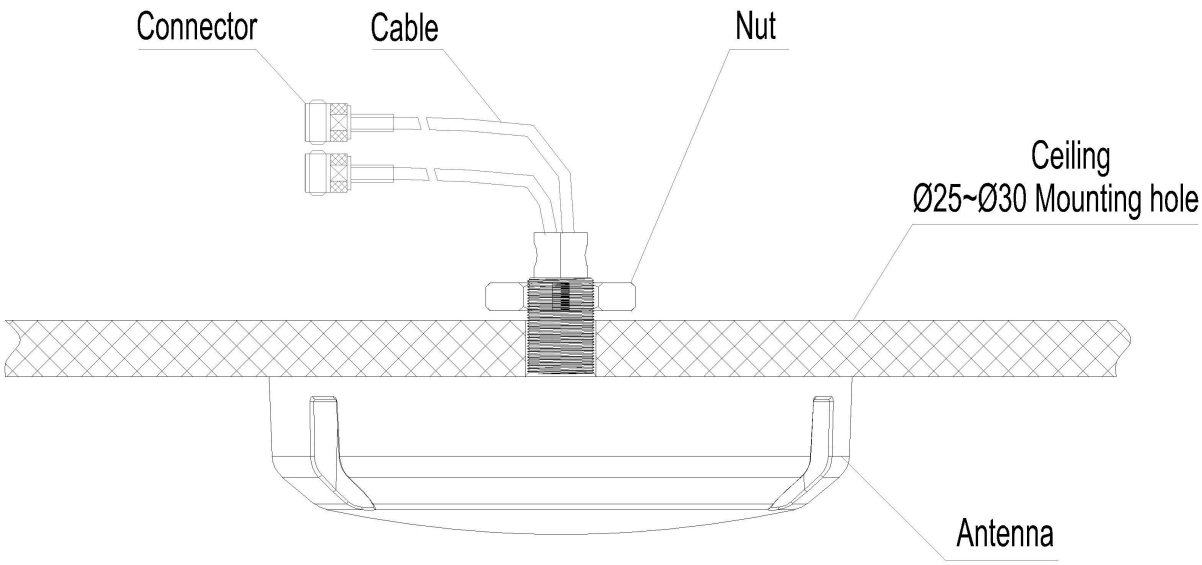

1、Drill a round hole Φ25mm～Φ30mm on the ceiling.
2、Match the antenna to the round hole.
3、Fix the antenna onto the ceiling with the screws.
Attention!
The hole on the ceiling must be slightly bigger than the antenna connector flange, and the antenna base plate should be in close contact with the ceiling, which influences the performance of the antenna.

Kenbotong reserves the right to change specifications without prior notice.

No.2 ChanxiuRoad, Foshan, Guangdong, China. 528061 Tel: +86-757-82219788 Fax: +86-757-82212072
Email: kbt@kenbotong.com Web: http://www.kenbotong.com