

**KBT**

# 617~960/1400~2700/3300~6000MHz 1.5/3/3dBi Omnidirectional Terminal Antenna

**TQX-0660LB****Application**

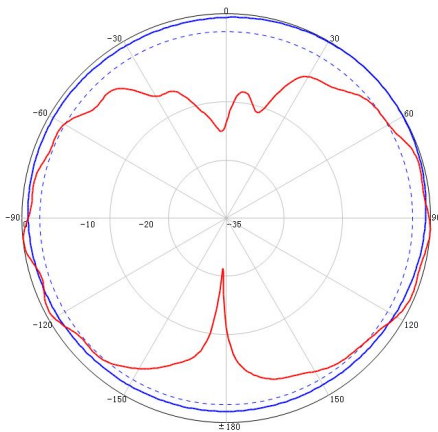
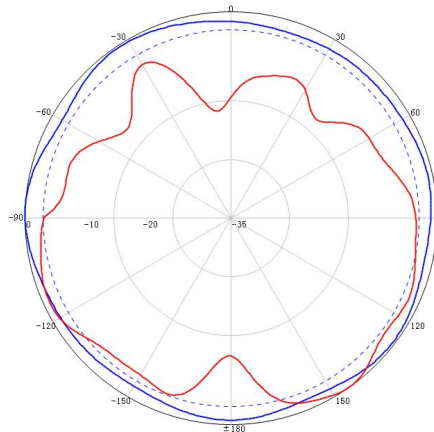
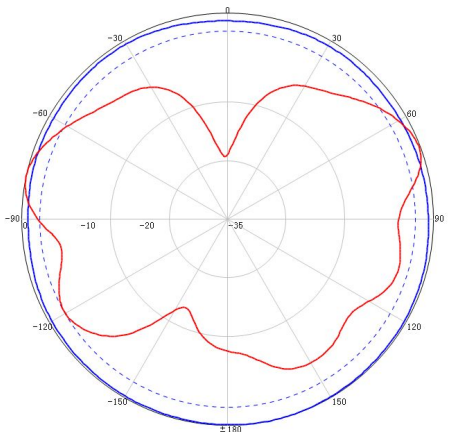
Used in 2G/3G/4G/5G/WLAN system

**Electrical specifications**

Frequency range (MHz)	617~960	1400~2700	3300~6000
Polarization	Vertical		
Maximum Gain (dBi)	1.5	3	3
Horizontal beam width (°)	360		
Vertical beam width (°)	90	70	50
Impedance (Ω)	50		
VSWR	≤2.5	≤2.8	≤2.5
Maximum power (W)	50		

**Mechanical specifications**

Connector	SMA male
Connector position	Bottom
Antenna size (mm)	(218×26×φ13.5) ±1
Weight (g)	48±3
Radome material	ABS
Radome color	Black
Operating temperature (°C)	-40~60
Operating humidity (%)	5~95
Application	Indoor

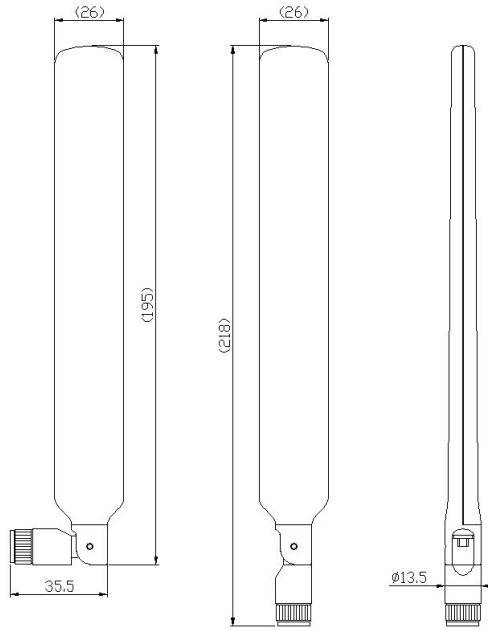
**617~960MHz Typical pattern:****1400~2700MHz Typical pattern:****3300~6000MHz Typical pattern:**



**KBT**

617~960/1400~2700/3300~6000MHz 1.5/3/3dBi  
Omnidirectional Terminal Antenna

**Product size**



**Product pictures**

