



FILAMENTS FOR 3D PRINTER

3D PRINTER FILAMENT


HIGH ACCURACY

NO BUBBLE

NO CLOG

NO WARP

ADHERE TO THE USE OF IMPORTED RAW MATERIALS AND
ELIMINATE MODIFIED RAW MATERIALS

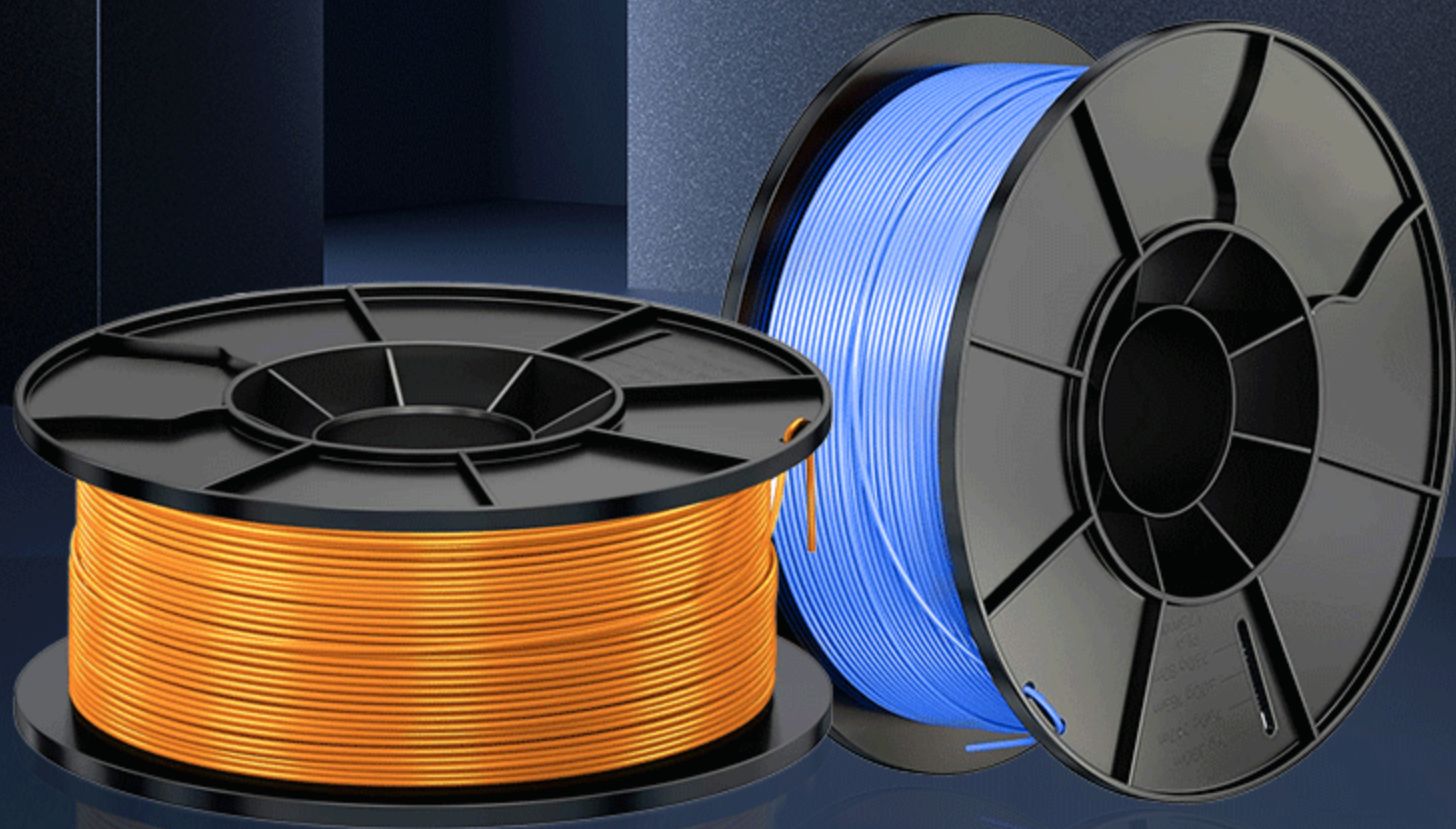

STABLE DIAMETER



SOOMTH
EXTRUDING



NO BUBBLE



NEATLY LINED



ENVIRONMENT
& SAFETY

100% PURE PLA



The raw materials imported from the
United States has high quality.



Precision diameter



The tolerance is less than 0.02mm, printing more stable.




High toughness



Toughness strengthening of modified PLA material
It is more suitable for printing models with complex structure



Various color




Various colors are available, and the color is brightHigh
printing saturation and beautiful finished products.




COLOR DISPLAY




WHITE

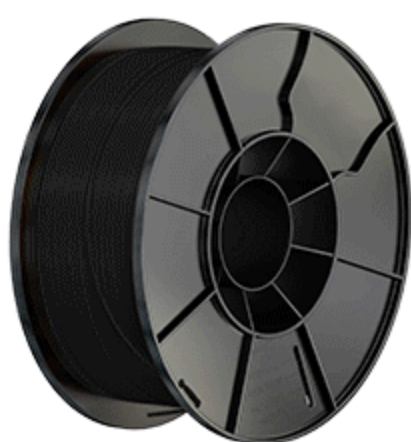

BLACK

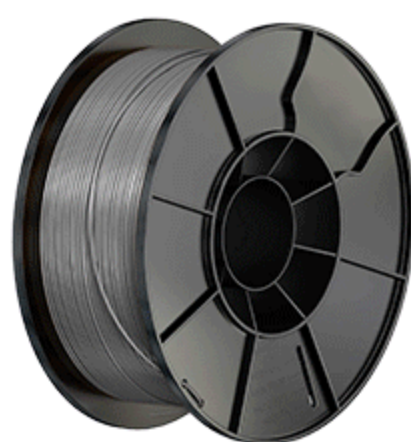


GRAY

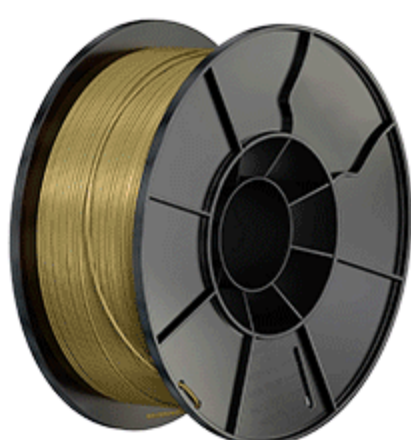


GOLDEN



SLIVER

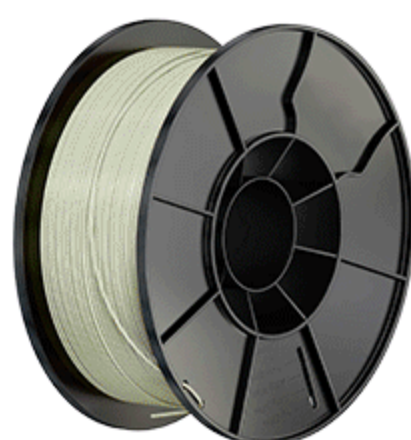


NATURE

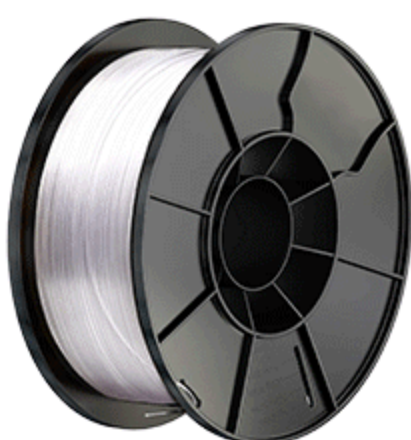


TRANSPARENT




RED

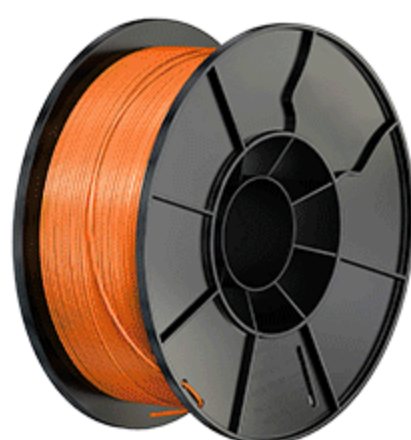

DARK ORANGE

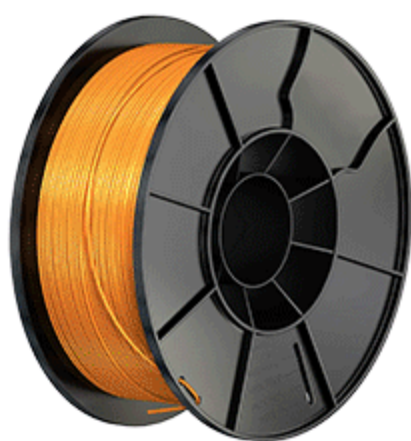

LIGHT ORANGE

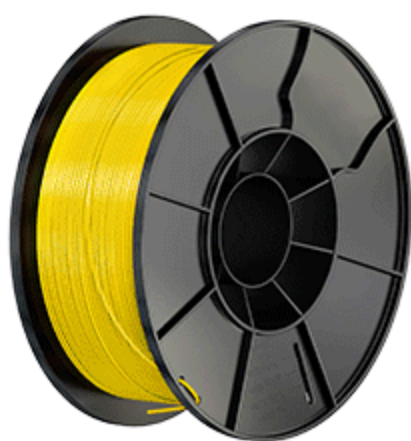


YELLOW




LEMON YELLOW



GREEN

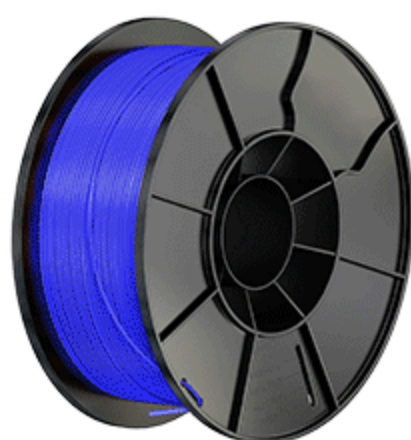

DARK BLUE

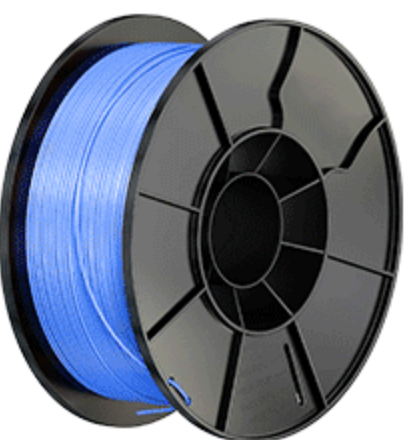

BABY BLUE

CUSTOM MADE COLOR IS ACCEPTED.
PLEASE CONTACT CONSULTANT FOR COLOR.

FINISHED PRODUCT MODEL



PRODUCT PARAMETERS



1kg

BRAND DOWELL 3D	MATERIAL PLA
DIAMETER 1.75mm/2.85mm	NET WEIGHT 1kg
LENGTH 330M	PRINTING TEMP 200-220°C
TOLERANCE ±0.02mm	PRINTING SPEED 30-200mm/s