

SHEARER 3.0Mini Combination Three-Sides Baskets

Installation manual

Shearer 3.0 mini series

HIGOLD®

Loading Design Perfect experience. The beauty of industrial design.



Cabinet	Width
900mm	864mm
800mm	764mm
750mm	714mm
700mm	664mm
600mm	564mm

Minimum cabinet height: 210mm, and minimum cabinet depth: 460mm

STEP - 01 -

Accessory list


Assembly note, install in a 900mm cabinet.



Three-Side pull out basket for all kind of pot*;
Multi Purpose three-side pull out basket*1



Slider*1Set; Installation template*1

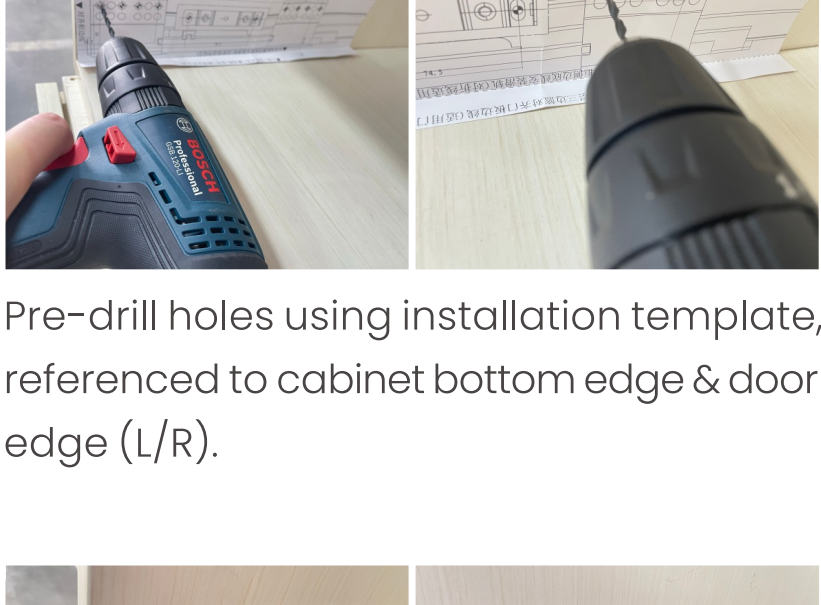

door panel fixing bracket*4PCS
slide fixing plate*4PCS
socket head cap screws
(Jacking the panel) *8PCS
M4*10 screws *8PCS
ST4.0*16 self-tapping screws *36PCS




Water collection tray*2PCS, Door cover cap*4PCS

STEP - 02 -


Slide rail installation



Pre-drill holes using installation template, referenced to cabinet bottom edge & door edge (L/R).

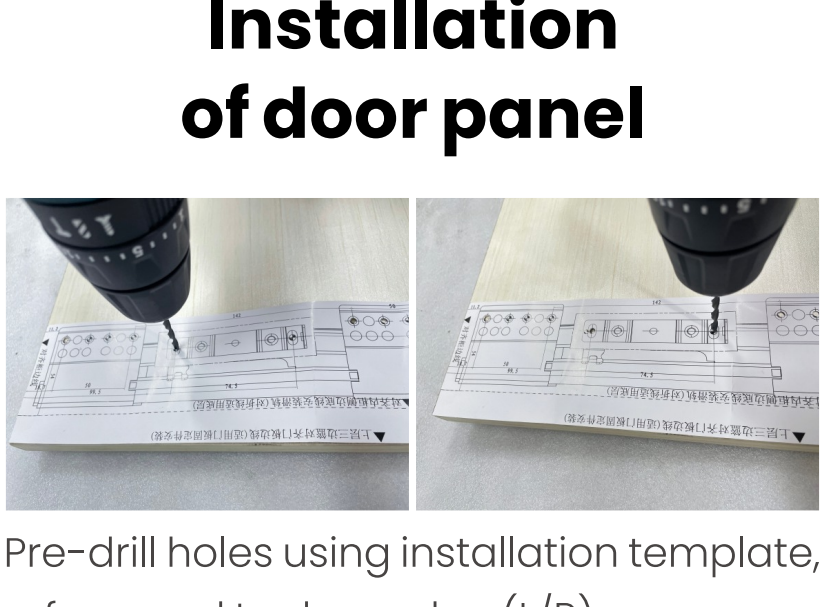

Mount slide (L/R) by aligning fixing holes to pre-drilled holes and fastening with ST4.0*16 self-tapping screw.

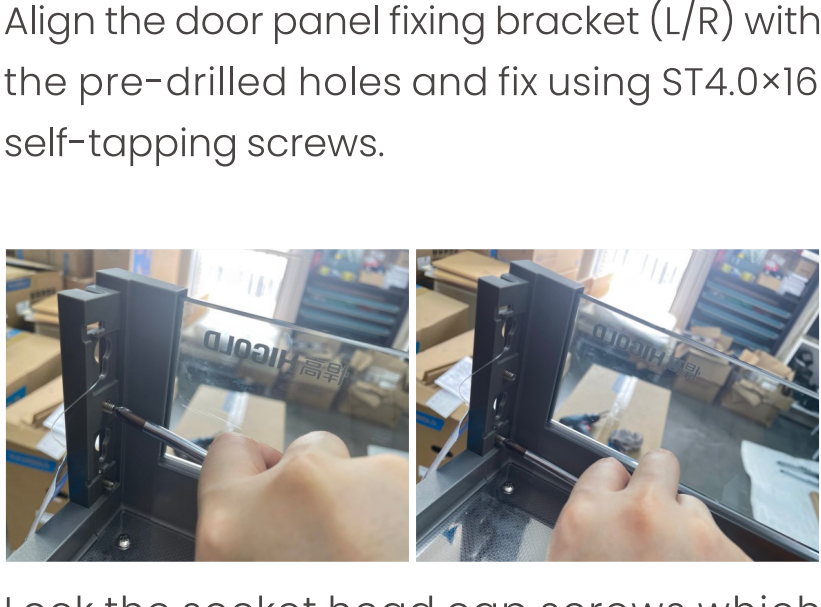

Slide installed. (Repeat for upper slide using bottom front door as alignment guide.)

STEP - 03 -


Installation of three-side basket



Engage the rail end hook into the rear slot (L/R) of the three-side basket.



Use M4*10 screws to lock the guide rail fixing plate on the outer rail of the slide rail (left/right).

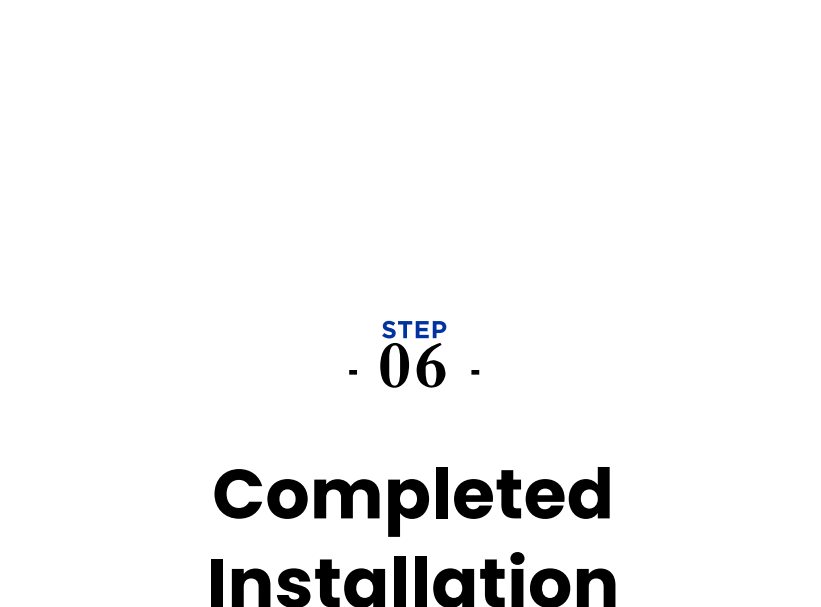


Use M4*10 screws to pass through the holes of the three-side basket bottom plate and lock them on the slide rail fixing plate (left/right).



Installation of the three-side basket is completed (the upper Multi Purpose three-side basket is assembled in the same way).

STEP - 04 -

Installation of door panel

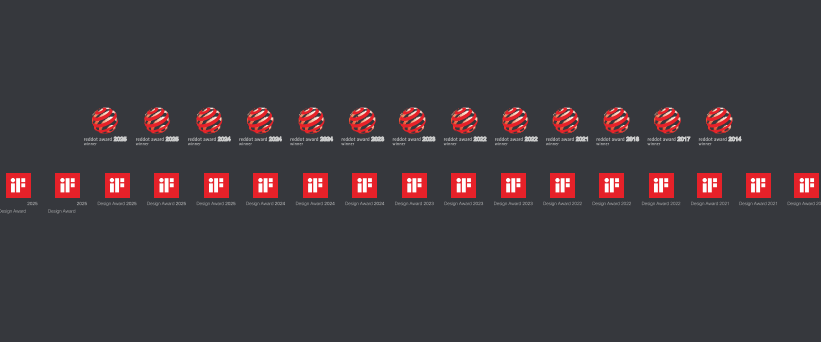

Pre-drill holes using installation template, referenced to door edge (L/R).

Align the door panel fixing bracket (L/R) with the pre-drilled holes and fix using ST4.0*16 self-tapping screws.

Lock the socket head cap screws which jacking the panel into the corner plate of the three-side basket (for adjusting the door panel).

Hang the door panel into the corner hole of the three-side basket.

Adjust the upper and lower screws, head cap screws which jacking the panel, to make the door panel and the cabinet fit tightly and flush, and fix the door panel screws.

STEP - 05 -

Accessories Installation

Install the door panel decorative cover, align it with the card slot and push it in place.

Install the dish rack and chopstick box accessories.

Install the water collection tray by aligning it with the slots and pushing it firmly into the bottom mounting grooves.

STEP - 06 -

Completed Installation

The combination three-side baskets installation completed.

Installation Notes for combination three-side Baskets:

1. Pay attention to the installation size to avoid interference from pulling the basket after assembly;

2. For double-layer installation, the upper layer installation shall be based on the height of the door panel.