









1.Installation Tools

| | | | | | | |
|---|---|---|---|---|---|--|
|  |  |  |  |  |  |  |
| Screwdriver | Hammer | Tape Measure | Impact Drill | Wrench | Pencil | Spirit Level |

2.Installation Diagram

•The diagram illustrates the following hole positions:

- A: Mirror fixing hole
- B: Base cabinet fixing hole
- C: Hot and cold water inlet holes
- D: Wall drain outlet hole
- F: Power cord

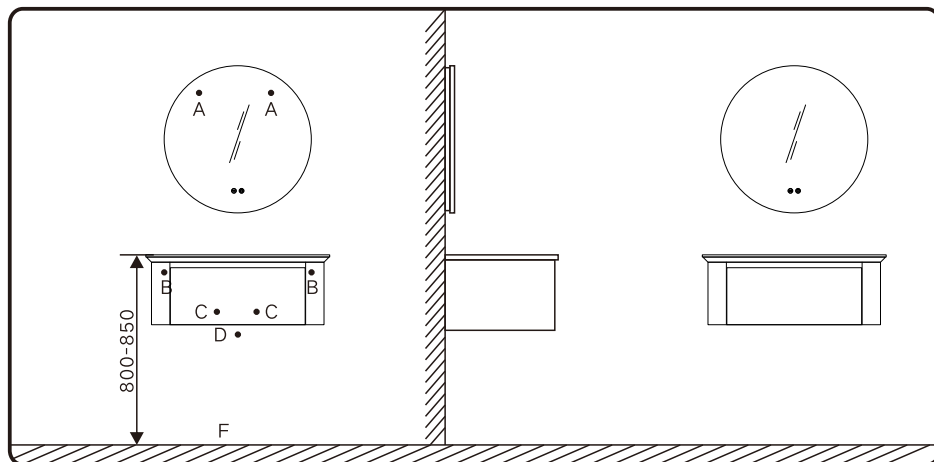


•Note: The diagrams in this manual are for reference only and are not actual images. Please verify the installation data on-site. If there are discrepancies, please measure based on the actual product. No further notice will be given

Mirror User Manual

3.Installation Steps

Smart Mirror Installation Steps


•1.Choose the mirror installation position on the wall, then mark the drilling positions with a pencil. Use a level to ensure the holes are aligned horizontally.
(Note: Please customize the installation position based on actual needs or according to the installation template dimensions. Smart installation requires electrical wiring.)

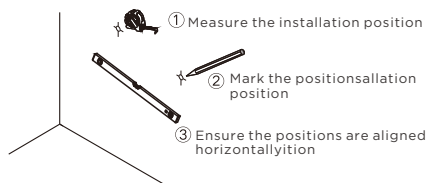

•3.Screw in the screws.



•2.Pre-drill the marked holes with an impact drill, then use a hammer to insert the expansion tubes into the holes.
(Tip: Drill two holes as needed.)

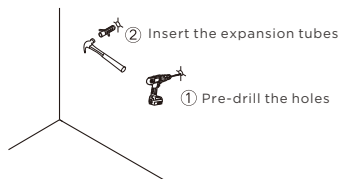

•4.Hang the mirror mounting plate on the screws.




•Note: The aluminum frame light strip does not bear weight. Do not hang it on the fixing screws.

Power Cord Installation Layout


Surface Mounting

Method 1: Plug directly into the socket



Concealed Mounting


Method 2: Cut off the plug and connect to the home power supply




Note: Before cutting the plug, ensure the mirror light functions properly by testing with the plug.

Concealed Mounting Steps


•5.Strip about 10mm of the outer insulation from the quick-connect wire.

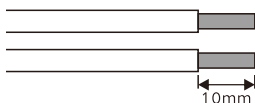

•6.Open the pusher and insert the wire into the terminal hole.
(Note: Ensure the stripped part is fully inserted and not exposed.)



•7.Press the pusher by hand to complete the installation.
(Note: To disassemble, lift the pusher and pull out the wire.)



•8.After completing the wiring, neatly arrange and hide the wires behind the mirror. Then, power on and test if all functions of the mirror are working properly.

