TYT STEEL

COMPANY INTRODUCTION

Tianjin Tian'Ying'Tai (TYT) Steel Pipe Co., Ltd. is located in Jinghai, Tianjin, which is professionally engaged in production of ERW steel tubes, including both of black and galvanize, tubes'processing and export business related.We have 12 production lines, 10 processing production lines and 50 sets equipment for steel production. Our annual capacity is 500, 000 tons of various sizes of ERW pipe, square tube and rectangular tube.TYT's products are widely used in agriculture, chemical industry, machinery, construction, utilities, sports equipment and other fields. Our customers are from Asia, the Middle East, European Union and other countries.

In order to provide customers with qualified products and quick delivery, we offer indoor storage with efficient service and our own transport team offer 24 hours transportation services to customers.

We insist on following " honor business, honor heart"

We look forward to implementing "work together and create a better future!"

PRODUCTION CERTIFICATES

ISO International Quality
Management System Certificate
国际质量管理体系认证

ISO International Quality
Management System Certificate
国际质量管理体系认证

BS OHSAS Occupational Health
And Safety Certificate
职业健康安全证书

BS OHSAS Occupational Health
And Safety Certificate
职业健康安全证书

Philippine Standard Quality Mark
License
菲律宾国家标准质量许可证

CE Certificate Of Construction Tube
--EN10219
欧盟建筑品牌法规认证

CE Certificate Of Construction Tube
--EN10219
欧盟建筑品牌法规认证

PRODUCTION PROCESS FLOW CHART

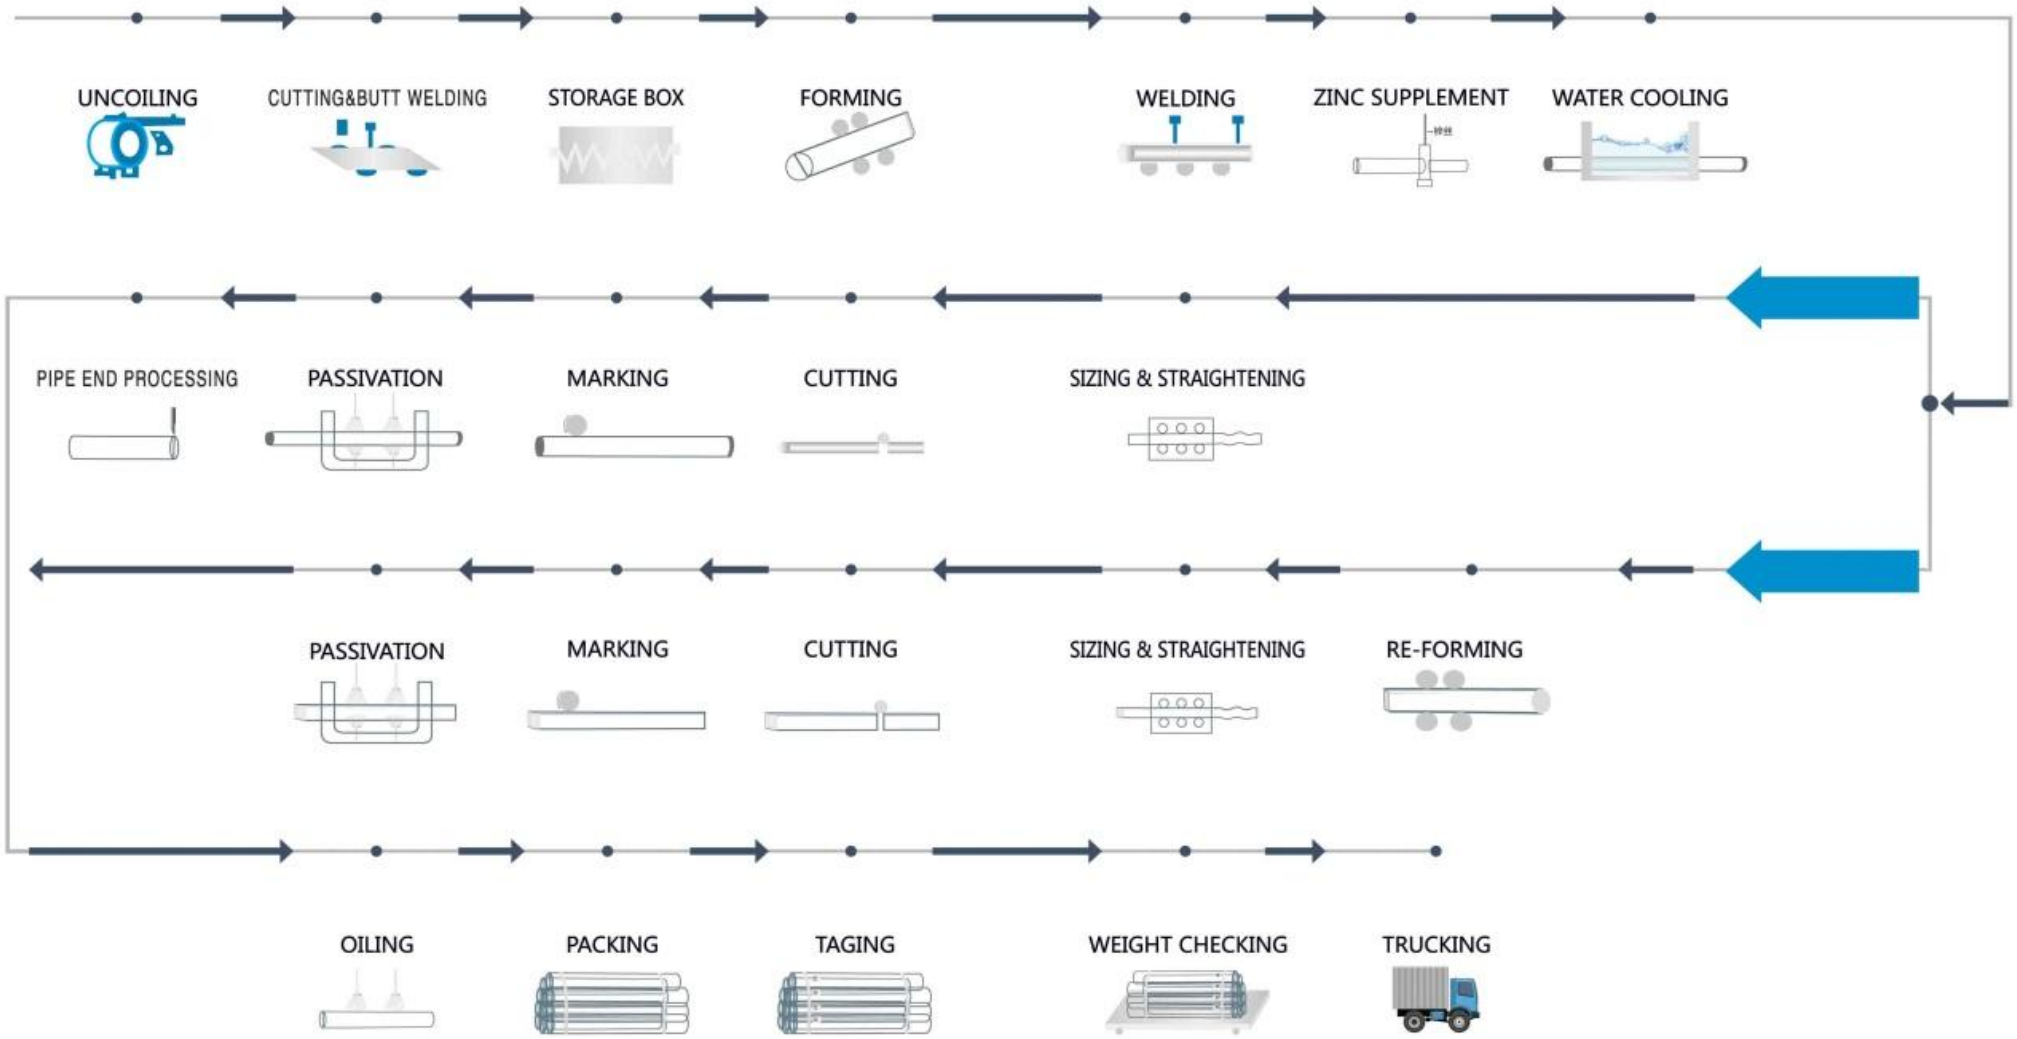

PRODUCTION EQUIPMENT

DJJ-500 metal strip docking machine

Core parameters and paramter description:

Strip width ≤ 500mm
Strip thickness: 0.5-4.0mm
Welding speed: 75-350mm/min

effect

Welding quality,high strength,speed,guarantee continuous production line

DJJ-500 metal strip docking machine

High Frequency Welded Pipe Unit

Core parameters and paramter description:

Diameter range: OD 15-273mm
Wall thickness range: 0.5-12.7mm
Forming speed: 20-130mm

effect

Efficient use of current skin effect and proximity effect, be welded in squeezing rellers squeeze under,is the core pipe production line

High Frequency Welded Pipe Unit

Servo motor cutting device

Servo motor cutting device

Core parameters and paramter description:

Length accuracy: ±3mm
Adaptation tube speed: Max130 / min

effect

Various cut lengths to meet customer order requirements

Passivation solution automatic spraying system

Passivation solution automatic spraying system

Core parameters and paramter description:

On the steel surface 360-degree spray,
to achieve uniform coverage results

effect

And product surface corrosion resistance of key equipment
(the company has applied for special invention)

Pipe end processing apparatus

Pipe end processing apparatus

Core parameters and paramter description:

Using three evenly distributed
High-alloy steel head end processing
For the outer diameter of 15-273mm
ERW

effect

And product surface corrosion resistance of key equipment
(the company has applied for special invention)

OUR LABORATORY

Adbering to the philosophy of "quality, the life of product", we focus on brand strategy and improving ourselves all the time.We established a full-featured "experimental test center" in 2014,with 10 test equipments.To gurantee what you offer is exact what client need,we can implement different laboratory test for different purpose, including bending test, chemical analysis, mechanical property and test of load-bearing, impact test, flattern test. We do solve all before shipment and let clients get right products after shipment.

Experiment & Test Center

Salt Spray Test

Bending Test

Samples Sections

PRODUCTION STANDARDS

No	Usage/Purpose	Standards	Grades	Surface
1	Water/Gas Construction Tubes	ASTM A53	A/B	Paint/Hot Dipe Galv
2		EN10255	Light/Medium/Heavy	Paint/Hot Dipe Galv
3		BS1387	Light/Medium/Heavy	Paint/Hot Dipe Galv
4		AS1163	C250/L0/C350/L0	NOPC /Primer/Hot Dipe Galv
5		AS1074	C250/L0	NOPC /Primer/Hot Dipe Galv
6		ISO 65	Medium/ Ligh Series I/II	Paint/Hot Dipe Galv
7		SAN62	Medium/Heavy	Paint/Hot Dipe Galv
8	Structural Steel Tubes/Scaffold Tubes	ASTM A500	A/B/C	Paint/Hot Dipe Galv
9		ASTM A795	A/B, SCH10/30/40	Paint/Hot Dipe Galv
10		ASTM A252	GR 1/2/3	Paint
11		EN10219	S235/S355JRH/J0H/J2H	Varnish/Hot Dipe Galv
12		EN10210	S355J0H/J2H	Heat Treatment
13		ASTM A501	A/B	Heat Treatment
14		JIS G3444	STK400/STK500	Hot Dip Galv
15		BS1139/EN39	S235JRH / S235GT	Hot Dip Galv
16		EN10305-5	E195/E220/E320	Paint/Pre Galv/Hot Dip Galv
17	Conduit Tubes	ANSI C80.1	RMC (Threaded & Socket)	Hot Dip Galv
18		ANSI C80.3	EMT (Plain)	Pre-Galv / Hot Dip Galv
19		ANSI C80.6	IMC (Threaded & Socket)	Hot Dip Galv
20		BSEN61386	Class 1/2/3/4	Paint/Pre Galv/Hot Dip Galv
21	Hot Diped Galvanzied Specification	EN10240	As Per Standard Or As Specific Requirement	
		ASTM A123	As Per Standard Or As Specific Requirement	
22		ISO 1461	As Per Standard Or As Specific Requirement	
23	Threaded Specification	BS 21	BSP	Paint/Hot Dipe Galv
24		ISO 7/1	BSP	Paint/Hot Dipe Galv
25		ANSI B1.20.1	NPT	Paint/Hot Dipe Galv
26	Mill Cetificate	EN10204	Type 1/Type 2	
27	Materials	A36/EN10025/ST37.2/ST52.3 / DX51D		

Inspection test available

1	Chemical Test	(C/Mn/Si/S/P, others can be required specificly)
2	Mechancial Test	(Yield Strength/Tensile Strength/Elongation)
3	Impact Tests:	(Room Tempreture/ zero degrees celsius/ minus 20 degrees celsius)
4	Hydrostatic Test	as per standard
5	Neutral Salt Spray Test	8hrs-48hrs, Nacl 5%
6	Bending Test	as per instruction
7	Size Measurement	as per contract
8	Weight Checking	as per contract
9	Quantity Checking	as per contract

BS1387:1985/EN10255

TUBE	SIZE尺寸		OUTSIDE DIA BLACK/GALVANIZED TUBE 黑/镀锌管的外径 MINIMUM最小		MAXIMUM最大		WALL THICKNESS 壁厚		WEIGHT OF BLACK/GALVANZIED TUBE 黑/镀锌管重量 PLAIN ENDS 平头		SCREWDE & SOCKETED 车丝		PIECES PER BUNDLE 打包支数
	INCH	NB(MM)	INCHES	MM	INCHES	MM	INCHES	MM	KG/FT	KG/MTR	KG/FT	KG/MTR	
LIGHT 轻型	1/2"	15	0.825	21.0	0.841	21.4	0.079	2.0	0.289	0.947	0.291	0.956	153
	3/4"	20	1.041	26.4	1.059	26.9	0.091	2.3	0.421	1.38	0.424	1.39	127
	1"	25	1.309	33.2	1.328	33.8	0.102	2.6	0.603	1.98	0.61	2	91
	1 1/4"	32	1.650	41.9	1.67	42.5	0.102	2.6	0.774	2.54	0.783	2.57	61
	1 1/2"	40	1.882	47.8	1.903	48.4	0.114	2.9	0.985	3.23	0.997	3.27	61
	2"	50	2.347	59.6	2.37	60.2	0.114	2.9	1.24	4.08	1.26	4.15	37
	2 1/2"	65	2.960	75.2	2.991	76	0.126	3.2	1.74	5.71	1.78	5.83	37
	3"	80	3.460	87.9	3.491	88.7	0.126	3.2	2.05	6.72	2.1	6.59	19
	4"	100	4.450	110.0	4.481	113.9	0.142	3.6	2.97	9.75	3.05	10	19
MEDIUM 中型	1/2"	15	0.831	21.1	0.856	21.7	0.102	2.6	0.369	1.21	0.372	1.22	127
	3/4"	20	1.047	26.6	1.072	27.2	0.102	2.6	0.475	1.56	0.479	1.57	101
	1"	25	1.316	33.4	1.346	34.2	0.126	3.2	0.735	2.41	0.741	2.43	61
	1 1/4"	32	1.657	42.1	1.687	42.9	0.126	3.2	0.945	3.1	0.954	3.13	51
	1 1/2"	40	1.889	48.0	1.919	48.8	0.126	3.2	1.09	3.57	1.1	3.61	44
	2"	50	2.354	59.8	2.394	60.8	0.142	3.6	1.53	5.03	1.55	5.1	29
	2 1/2"	65	2.969	75.4	3.014	76.6	0.142	3.6	1.96	6.43	1.99	6.55	24
	3"	80	3.469	88.1	3.524	89.5	0.157	4.0	2.55	8.37	2.6	8.54	19
	4"	100	4.459	113.3	4.524	114.9	0.177	4.5	3.72	12.2	3.81	12.5	14
	5"	125	5.461	138.7	5.535	140.6	0.197	5.0	5.06	16.6	5.21	17.1	10
	6"	150	6.460	164.1	6.539	166.1	0.197	5.0	6	19.7	6.19	20.3	7
HEAVY 重型	1/2"	15	0.831	21.1	0.856	21.7	0.126	3.2	0.439	1.44	0.442	1.45	127
	3/4"	20	1.047	26.6	1.072	27.2	0.126	3.2	0.57	1.87	0.573	1.88	101
	1"	25	1.316	33.4	1.346	34.2	0.157	4.0	0.896	2.94	0.902	2.96	61
	1 1/4"	32	1.657	42.1	1.687	42.9	0.157	4.0	1.16	3.8	1.17	3.83	51
	1 1/2"	40	1.889	48.0	1.919	48.8	0.157	4.0	1.33	4.38	1.35	4.42	44
	2"	50	2.354	59.8	2.394	60.8	0.177	4.5	1.89	6.19	1.91	6.26	29
	2 1/2"	65	2.969	75.4	3.014	76.6	0.177	4.5	2.42	7.93	2.45	8.05	24
	3"	80	3.469	88.1	3.524	89.5	0.197	5.0	3.14	10.3	3.2	10.5	19
	4"	100	4.459	113.3	4.524	114.9	0.212	5.4	4.42	14.5	4.51	14.8	14
	5"	125	5.461	138.7	5.535	140.6	0.212	5.4	5.46	17.9	5.61	18.4	10
	6"	150	6.460	164.1	6.539	166.1	0.212	5.4	6.49	21.3	6.67	21.9	7

ASTM A500 GRADE A/B/C（美标 A500-A/B/C）

DIMENSION尺寸 (INCH英寸)	THICKNESS壁厚 (INCH英寸)	THICKNESS壁厚 (MM毫米)	THICKNESS壁厚 (GAUG厚度)
1/2"×1/2"	0.042	1.07	19
	0.049	1.24	18
	0.058	1.47	17
	0.065	1.65	16
	0.072	1.83	15
5/8"×5/8"	0.042	1.07	19
	0.049	1.24	18
	0.058	1.47	17
	0.065	1.65	16
	0.072	1.83	15
	0.083	2.11	14
3/4"×3/4"	0.042	1.07	19
	0.049	1.24	18
	0.058	1.47	17
	0.065	1.65	16
	0.072	1.83	15
	0.083	2.11	14
	0.095	2.41	13
	0.12	3.05	11
1"×1"	0.042	1.07	19
	0.049	1.24	18
	0.058	1.47	17
	0.065	1.65	16
	0.072	1.83	15
	0.083	2.11	14
	0.095	2.41	13
	0.109	2.77	12
	0.12	3.05	11
1 1/4"×1 1/4"	0.042	1.07	19
	0.049	1.24	18
	0.058	1.47	17
	0.065	1.65	16
	0.072	1.83	15
	0.083	2.11	14
	0.095	2.41	13
	0.109	2.77	12
	0.12	3.05	11
1 1/2"×1 1/2"	0.042	1.07	19
	0.049	1.24	18
	0.058	1.47	17
	0.065	1.65	16
	0.072	1.83	15
	0.083	2.11	14
	0.095	2.41	13
	0.109	2.77	12
	0.12	3.05	11
2"×1"	0.042	1.07	19
	0.049	1.24	18
	0.058	1.47	17
	0.065	1.65	16
	0.072	1.83	15
	0.083	2.11	14

DIMENSION尺寸 (INCH英寸)	THICKNESS壁厚 (INCH英寸)	THICKNESS壁厚 (MM毫米)	THICKNESS壁厚 (GAUG厚度)
2"×1"	0.095	2.41	13
	0.109	2.77	12
	0.12	3.05	11
2"×2"	0.042	1.07	19
	0.049	1.24	18
	0.058	1.47	17
	0.065	1.65	16
	0.072	1.83	15
	0.083	2.11	14
	0.109	2.77	12
	0.12	3.05	11
	0.165	4.19	8
	0.18	4.57	7
2-1/2"×2-1/2"	0.042	1.07	19
	0.049	1.24	18
	0.058	1.47	17
	0.065	1.65	16
	0.072	1.83	15
	0.083	2.11	14
	0.109	2.77	12
	0.12	3.05	11
	0.165	4.19	8
	0.18	4.57	7
	0.083	2.11	14
3"×3"	0.095	2.41	13
	0.12	3.05	11
	0.18	4.57	7
	0.25	6.35	
	0.313	7.95	
3 1/2"×3 1/2"	0.083	2.11	14
	0.095	2.41	13
	0.12	3.05	11
	0.18	4.57	7
	0.25	6.35	
	0.313	7.95	
	0.083	2.11	14
4"×2"	0.095	2.41	13
	0.12	3.05	11
	0.18	4.57	7
	0.25	6.35	
	0.313	7.95	
4"×3"	0.083	2.11	14
	0.095	2.41	13
	0.12	3.05	11
	0.18	4.57	7
	0.25	6.35	
	0.313	7.95	
4"×4"	0.083	2.11	14
	0.095	2.41	13
	0.12	3.05	11
	0.18	4.57	7
	0.25	6.35	

ASTM A500 GRADE A/B/C（美标 A500-A/B/C）

DIMENSION尺寸 (INCH英寸)	THICKNESS壁厚 (INCH英寸)	THICKNESS壁厚 (MM毫米)	THICKNESS壁厚 (GAUG厚度)
5"×5"	0.12	3.05	11
	0.18	4.57	7
	0.25	6.35	
	0.313	7.95	
6"×2"	0.12	3.05	11
6"×3"	0.18	4.57	7
	0.25	6.35	
	0.313	7.95	
	0.12	3.05	11
	0.18	4.57	7
	0.25	6.35	
6"×4"	0.313	7.95	
	0.12	3.05	11
	0.18	4.57	7
	0.25	6.35	
6"×6"	0.313	7.95	
	0.18	4.57	7
	0.25	6.35	
	0.313	7.95	
7"×7"	0.375	9.53	
	0.5	12.7	
	0.18	4.57	7
	0.25	6.35	
8"×4"	0.313	7.95	
	0.375	9.53	
	0.5	12.7	
	0.18	4.57	7
	0.25	6.35	
8"×6"	0.313	7.95	
	0.375	9.5	
	0.5	12.7	7
	0.18	4.57	
	0.25	6.35	
8"×8"	0.313	7.95	
	0.375	9.53	
	0.5	12.7	7
	0.18	4.57	
10"×4"	0.25	6.35	
	0.313	7.95	
	0.375	9.53	
	0.5	12.7	7
	0.18	4.57	
	0.25	6.35	
	0.313	7.95	
	0.375	9.53	
	0.5	12.7	7
10"×6"	0.18	4.57	
	0.25	6.35	
	0.313	7.95	
	0.375	9.53	
	0.5	12.7	

DIMENSION尺寸 (INCH英寸)	THICKNESS壁厚 (INCH英寸)	THICKNESS壁厚 (MM毫米)	THICKNESS壁厚 (GAUG厚度)
10"×10"	0.18	4.57	7
	0.25	6.35	
	0.313	7.95	
	0.375	9.53	
	0.5	12.7	
	0.18	4.57	7
12"×4"	0.25	6.35	
	0.313	7.95	
	0.375	9.53	
	0.5	12.7	
	0.18	4.57	7
12"×8"	0.25	6.35	
	0.313	7.95	
	0.375	9.53	
	0.5	12.7	
	0.18	4.57	7
12"×12"	0.25	6.35	
	0.313	7.95	
	0.375	9.53	
	0.5	12.7	
	0.18	4.57	7
14"×14"	0.25	6.35	
	0.313	7.95	
	0.375	9.53	
	0.5	12.7	
	0.562	14.27	
	0.625	15.88	
	0.18	4.57	7
	0.25	6.35	
16"×16"	0.313	7.95	
	0.375	9.53	
	0.5	12.7	
	0.562	14.27	
	0.625	15.88	
	0.18	4.57	7
	0.25	6.35	
20"×20"	0.313	7.95	
	0.375	9.53	
	0.5	12.7	
	0.562	14.27	
	0.625	15.88	
	0.18	4.57	7
	0.25	6.35	
24"×24"	0.313	7.95	
	0.375	9.53	
	0.5	12.7	
	0.562	14.27	
	0.625	15.88	
	=		
DIMENSION:	2/5"×2/5"-24"×24"(INCH)		
THICKNESS:	0.5-18(MM)		
LENGTH	100-12000(MM)		

美标钢管 LSAW /SSAW /ERW /SEAMLESS PIPE– API 5L/ASTM A106/ASTM A53 GRADE A/B

Inches NPS 英寸	DN 公称直径	O.D. 外径	SCH No.& Wall Thickness mm 管壁厚系数														
			SCH 5s	SCH 10S	SCH 10	SCH 20	SCH 30	SCH 40	SCH 60	SCH 80	SCH 100	SCH 120	SCH 140	SCH 160	STD	XS	XXS
1/8	DN6	10.3	–	1.24	–	–	–	1.73	–	2.42	–	–	–	–	1.73	2.41	–
1/4	DN8	13.7	–	1.65	–	–	–	2.24	–	3.02	–	–	–	–	2.24	3.02	–
3/8	DN10	17.1	–	1.65	–	–	–	2.31	–	3.2	–	–	–	–	2.31	3.20	–
1/2	DN15	21.3	1.65	2.11	–	–	–	2.77	–	3.73	–	–	–	4.78	2.77	3.73	7.47
3/4	DN20	26.7	1.65	2.11	–	–	–	2.87	–	3.91	–	–	–	5.56	2.87	3.91	7.82
1	DN25	33.4	1.65	2.77	–	–	–	3.38	–	4.55	–	–	–	6.35	3.38	4.55	9.09
1–1/4	DN32	42.2	1.65	2.77	–	–	–	3.56	–	4.85	–	–	–	6.35	3.58	4.85	9.70
1–1/2	DN40	48.3	1.65	2.77	–	–	–	3.68	–	5.05	–	–	–	7.14	3.68	5.08	10.15
2	DN50	60.3	1.65	2.77	–	–	–	3.91	–	5.54	–	–	–	8.74	3.91	5.54	11.07
2–1/2	DN65	73.0	2.11	3.05	–	–	–	5.16	–	7.01	–	–	–	9.53	5.16	7.01	14.02
3	DN80	88.9	2.11	3.05	–	–	–	5.49	–	7.62	–	–	–	11.13	5.49	7.52	15.24
3–1/2	DN90	101.6	2.11	3.05	–	–	–	5.74	–	8.08	–	–	–	–	5.74	8.08	–
4	DN100	114.3	2.11	3.05	–	–	–	6.02	–	8.58	–	11.13	–	13.49	6.02	8.56	17.12
5	DN125	141.3	2.77	3.4	–	–	–	6.55	–	9.53	–	12.70	–	15.88	6.55	9.53	18.05
6	DN150	168.3	2.77	3.4	–	–	–	7.11	–	10.97	–	14.27	–	18.26	7.11	10.97	21.95
8	DN200	219.1	2.77	3.76	–	6.35	7.04	8.18	10.31	12.70	15.09	18.26	20.62	23.01	8.18	12.70	22.23
10	DN250	273.1	3.40	4.19	–	6.35	7.8	9.27	12.70	15.09	18.26	21.44	25.4	28.58	9.27	12.70	25.40
12	DN300	323.9	3.96	4.57	–	6.35	8.38	10.31	14.27	17.48	21.44	25.4	28.58	33.32	9.35	12.70	25.40
14	DN350	355.5	3.96	4.78	6.35	7.92	9.53	11.13	15.09	19.05	23.83	27.79	31.75	35.71	9.53	12.70	–
16	DN400	406.4	4.19	4.78	6.35	7.92	9.53	12.70	16.66	21.44	26.19	30.96	36.53	40.49	9.53	12.70	–
18	DN450	457	4.19	4.78	6.35	7.92	11.13	14.27	19.05	23.83	29.36	34.93	39.67	45.24	9.53	12.70	–
20	DN500	508	4.78	5.54	6.35	9.53	12.70	15.09	20.62	26.19	32.54	38.1	44.45	50.01	9.53	12.70	–
22	DN550	559	4.78	5.54	6.35	9.53	12.70	–	22.23	28.58	34.93	41.28	47.63	53.98	9.53	12.70	–
24	DN600	610	5.54	6.35	6.35	9.53	14.27	17.48	24.61	30.96	38.89	46.02	52.37	59.54	9.53	12.70	–
26	DN650	660	–	–	7.92	12.7	–	–	–	–	–	–	–	–	9.53	12.70	–
28	DN700	711	–	–	7.92	12.7	15.88	–	–	–	–	–	–	–	9.53	12.70	–
30	DN750	762	6.35	7.92	7.92	12.7	15.88	–	–	–	–	–	–	–	9.53	12.70	–
32	DN800	813	–	–	7.92	12.7	15.88	17.48	–	–	–	–	–	–	9.53	12.70	–
34	DN850	864	–	–	7.92	12.7	15.88	17.48	–	–	–	–	–	–	9.53	12.70	–
36	DN900	914	–	–	7.92	12.7	15.88	19.05	–	–	–	–	–	–	9.53	12.70	–
38	DN950	965	–	–	–	–	–	–	–	–	–	–	–	–	9.53	12.70	–
40	DN1000	1015	–	–	–	–	–	–	–	–	–	–	–	–	9.53	12.70	–
42	DN1050	1067	–	–	–	–	–	–	–	–	–	–	–	–	9.53	12.70	–
44	DN1100	1118	–	–	–	–	–	–	–	–	–	–	–	–	9.53	12.70	–
46	DN1150	1188	–	–	–	–	–	–	–	–	–	–	–	–	9.53	12.70	–
48	DN1200	1219	–	–	–	–	–	–	–	–	–	–	–	–	9.53	12.70	–

CARBON STEEL PIPE

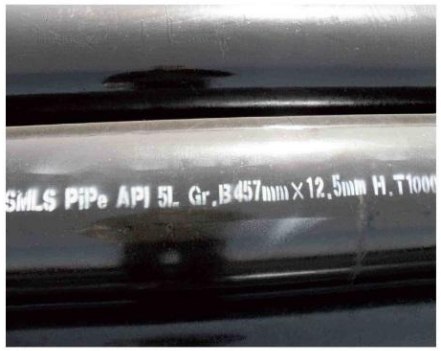

EMT CONDUIT 穿线管

Size 尺寸	Out DiameterW 外径		All Thickness 壁厚		length 长度	
[inch]	[inch]	[mm]	[inch]	[mm]	[feet]	[mm]
1/2	0.706	17.93	0.042	1.07	10	3050
3/4	0.922	23.42	0.049	1.25	10	3050
1	1.163	29.54	0.057	1.45	10	3050
1-1/4	1.510	38.35	0.065	1.65	10	3050
1-1/2	1.740	44.20	0.065	1.65	10	3050
2	2.197	55.80	0.065	1.65	10	3050
2-1/2	2.875	73.03	0.072	1.83	10	3050
3	3.500	88.90	0.072	1.83	10	3050
3-1/2	4.000	101.60	0.083	2.11	10	3050
4	4.500	114.30	0.083	2.11	10	3050

RSC CONDUIT 钢导线管

Size 尺寸	Out DiameterW 外径		All Thickness 壁厚		length 长度	
[inch]	[inch]	[mm]	[inch]	[mm]	[feet]	[mm]
1/2	0.840	21.34	0.104	2.64	10	3050
3/4	1.050	26.67	0.107	2.72	10	3050
1	1.315	33.40	0.126	3.2	10	3050
1-1/4	1.660	42.16	0.133	3.38	10	3050
1-1/2	1.900	48.26	0.138	3.51	10	3050
2	2.375	60.33	0.146	3.71	10	3050
2-1/2	2.875	73.03	0.193	4.9	10	3050
3	3.500	88.90	0.205	5.21	10	3050
3-1/2	4.000	101.60	0.215	5.46	10	3050
4	4.500	114.30	0.225	5.72	10	3050
5	5.563	141.30	0.245	6.22	10	3050

PRE GALVANIZED-PLANT

预镀锌厂房设备

PRE GALVANIZED-TUBES

预镀锌钢管

PRE GALVANIZED-PROCESSED PRODUCTS

加工类预镀锌产品

Cross Base

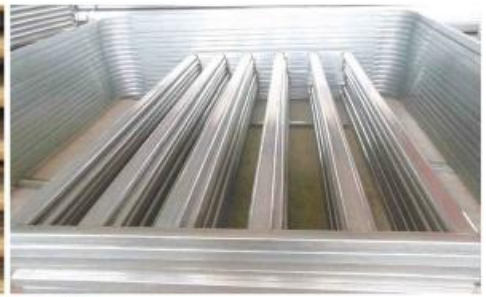

Fencing

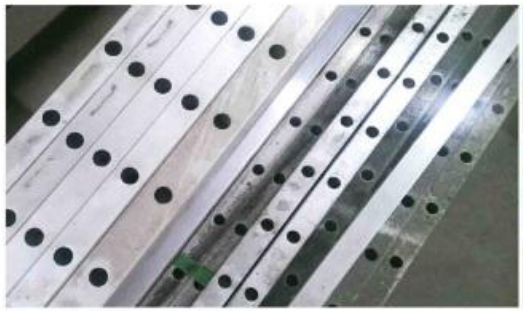

Punch Holes Tubes

Sharp Ends For Fence

Punch Square Hole Tubes For Fence

HOT DIPPED GALVANIZED-PLANT

热镀锌厂房设备

HOT DIPPED GALVANIZED-TUBES

热镀锌钢管

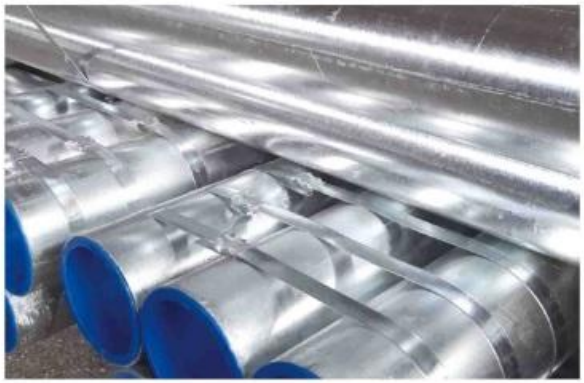

HOT DIPPED GALVANZIED-PROCESSED PRODUCTS

加工类热镀锌

Threaded ends,
with socket and plastic cap

Grooved ends

Fence

Post

OTHER HOT DIPPED GALVANIZED PRODUCTS

其他热镀锌产品

Cattle fence

Cattle panel

Galvanized spiral tubes

OTHER HOT DIPPED GALVANIZED PRODUCTS

其他热镀锌产品

Angle Bar

Post

C Profile

Z Profile

H Beam

Elbow

BLACK ROUND STEEL TUBES

黑圆管

Without painting

Cutting Plain End

Painted Tubes

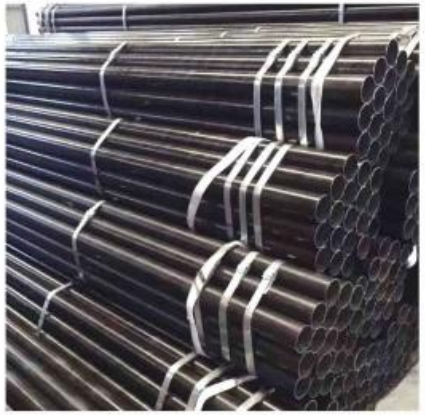

Oiled Tubes

BLACK STEEL TUBES

黑方管

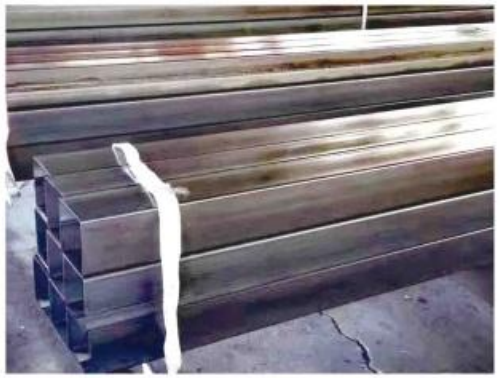

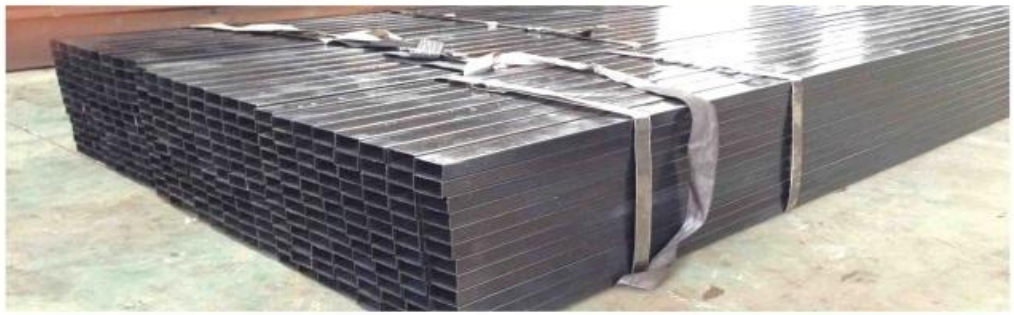

MARK, STAMP & PACKAGE

字标、钢印及包装

PACKAGING & TRANSPORTATION

包装及运输

BUILDING MATERIALS & TUBE EXHIBITIONS

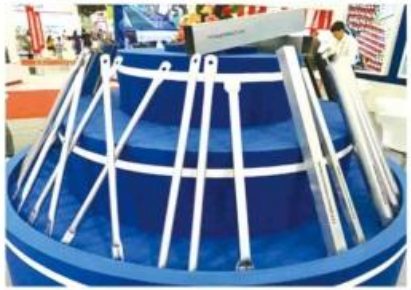

OUR CULTURE

Vision

- Think globally and act locally.

Operation Philosophy

- Only quality processes market and improvement gets progress.

Managing Philosophy

- Responsibility, co-ordination.

Company Value

- Honor business, honor heart.

TIANJIN TIAN YING TAI (TYT) STEEL PIPE CO.,LTD.
天津市天应泰钢管有限公司

ADD DAQIUZHUANG VILLAGE, JINGHAI COUNTY, TIANJIN,P.R.CHINA
地址 天津市静海区大邱庄镇陈大公路东500米
TEL/电话 86-022-28891186/1187/1816/1817
FAX/传真 86-022-28891185
E-mail/邮箱 INFO@TYTGG.COM / WWW.TYTGG.COM

TIANJIN HUILAI INTERNATIONAL TRADE CO., LTD.
天津汇来国际贸易有限公司

ADD DAQIUZHUANG VILLAGE, JINGHAI COUNTY, TIANJIN,P.R.CHINA
地址 天津市静海区大邱庄镇陈大公路东500米
TEL/电话 86-022-23778017 EXT 602/603/604/610/612/608
E-mail/邮箱 INFO@TYTGG.COM / WWW.TYTGG.COM

版本号：TYT-A2017(IV)

天应泰

TIANJIN TIAN YING TAI(TYT) STEEL PIPE CO.,LTD.



TYT STEEL

Implement the First-Quality strategy,lead the developing of industry
www.tytgg.com

Honor Business,Honor Heart