LZB-300-FR5 Vacuum Packing Machine



i. Application :

Suitable for granule materials' weighing & vacuum packing.(Rice, beans, seeds, sugar, pulses etc.)

ii. Technical Parameters:

LZB-300-FR5				
0.5-5				
Cubic Shape	Flatten Shape			
300-360	200-250			
1				
X(0.5)				
4N-AC 380V 50Hz 3.8KW				
0.4-0.6MPa 3m ³ /h				
2400				
	0. Cubic Shape 300-360 X(1 4N-AC 380V 0.4-0.6M			

iii. Main configures :

NO.	Name	Suppliers
1	Touch Screen	Japan/Omron
2	Weighing Controller	Canada/General measure
3	PLC	Japan/Omron
4	Power Supply	Japan/Omron

進佳花 Zhangzhou Jialong Technology Inc.

5	Solid State relay	Japan/Omron	
6	Intermediate relay	Japan/Omron	
7	Load cell	USA/celtron	
8	phase order protector	France/Schneider	
10	Vacuum pump	Germany/LEYBOLD	
11	Cylinder	Taiwan/airtac	
13	linear track	Taiwan/ABBA	

iv. Function & Features

- Unique design cubic and flatten shaping institution, flexible packing size, big packing weight extend, easy to change the mould
- Adopt imported load cell, Omoron touch screen, pneumatic element and detective element, reliable and with a self-reduction and safety devices
- The main structure of aluminum and stainless steel materials based, attractive looking and durable using
- imported from Germany, vacuum pumps, stable and reliable;
- Reserved RS232/485 serial port can be used with the external management system for data communication
- Echo-friendly design
- device with fault self-test function, maintenance is simple and convenient




(demo silo not included in machine)

Brick shape Mould : We provide 4 sets mould 0.5kg ; 1kg; 2.5kg, 5kg for the machine.





Product size:

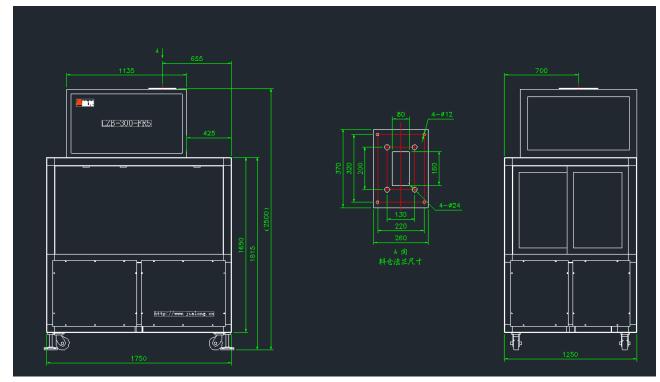

Packing bag suggested size \downarrow :

	nam	ne	size	material
-	品名	5	规格	材质
	5kg organ shape bag.	1风琴袋	460×230+80	B0PA15/PE120

Product name	Dimension(c m)	Single Layer Thickness(um)	Material
Polyethyl ene Bags(0.5kg)	29*8+4	105	BOPA & PE
Polyethyl ene Bags(1kg)	32*10+6	110	BOPA & PE
Polyethyl ene Bags(5kg)	47*23+8	135	BOPA & PE
Polyethyl ene Bags(25kg)	770+570mm	177	BOPA & PE

• All vacuum bags are made of A-grade raw materials.


• Good oxygen barrier property, no generate static electricity, good puncture resistance and tear resistance.

- BOPA : colorless, non-toxic, acid and alkali resistant, oil resistant.
- PE: Milky white, odorless, acid and alkali resistant, safe and nontoxic.

• The technical parameters of the packaging bag are strictly produced according to the standards provided by the company's technical department to ensure that it perfectly matches the equipment.





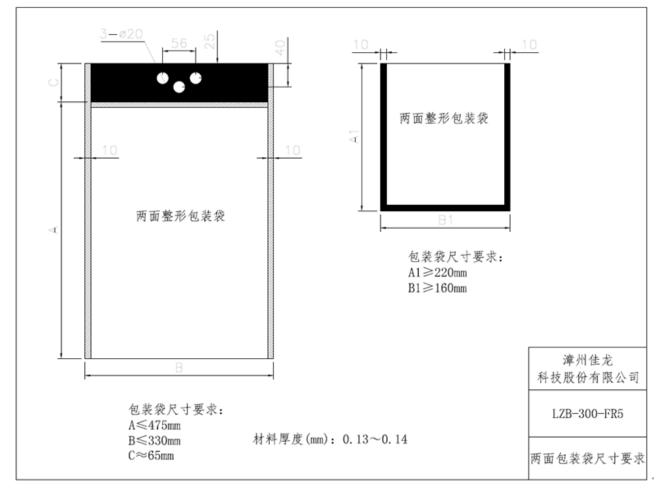

進佳矩 Zhangzhou Jialong Technology Inc.

Product sample





進度理 Zhangzhou Jialong Technology Inc.



Domo video: For brick shape: <u>https://youtu.be/2TnibF3GliY</u>

For Flat shape: <u>https://youtu.be/AYY_eBbfX10</u>