

DCS-5S-3A

GRANULE PACKING MACHINE

SPECIFICATION



DESCRIPTION OF MACHINE

- ☑ Double weighing hopper
- ☑ Include Packing Scale Body, Heat sealer, Touch screen controller
- ☑ Auto Weighing, Sealing
- ☑ High-precision controller, Automatic error correction,
- ☑ Auto alarm for over and under tolerance, fault auto diagnosis
- ☑ One key recovery function ,press the reset key back to the default parameters
- ☑ Super filter function of anti-vibration, anti-interference, ensure weighing process stable and accurate
- ☑ Reserve RS232/485 interface

Model	DCS-5S-3A
Weighing range (kg)	0.5~5
Speed (bag/h)	700-1000
Accuracy grade	X (0.5)
Power supply/consumption	4N-AC 220V 50Hz 0.8KW
Air supply/ consumption	0.4~0.6MPa 1m ³ /h
Install height (mm)	2200



DCS-5S-3A


GRANULE PACKING MACHINE

SPECIFICATION



QUALITY • CREDIBILITY • INNOVATION

FEATURES



Load cell

Adopted international famous brand



Three stage cylinder

One single cylinder achieves four-station moves



Compact structure

fast response and low failure rate




Save and long using life

The parts in touch with the raw materials are made of stainless steel

APPLICATIONS

Suitable for particle materials' weighing, packaging, sewing and conveying rice, beans, seeds, sugar, and other granule material.

INSTALL SIZE

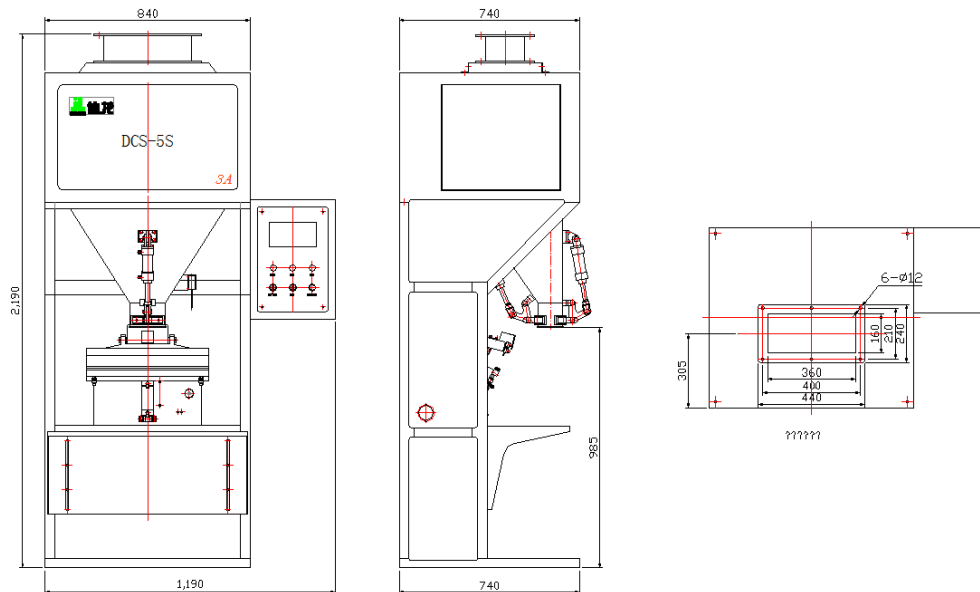

WARRANTY

One year machine warranty and lifetime provide paid maintenance.

MAIN CONFIGURATION

Item	Brand
Weighing controller	CA/ General Measure
Switching power supply	TW/Meanwell
Button, Knob	FR/Schneider
Load cell	USA/Celtron
Pneumatic elements	TW/Airtag
Air cylinder	TW/Airtag
Solenoid valve	TW/Airtag