

POWER FITTINGS FOR SUBSTATION

TRIGOLD

上海鑫之机电设备有限公司

TRIGOLD POWER CO.,LTD.

上海市西康路928号(创展大厦)312室, 邮编: 200040

ADDRESS: SUITE 312, NO.928 (CHUANGZHAN PLAZA) XIKANG ROAD,
SHANGHAI 200040, CHINA

TEL: 86-21-62764303

WEB SITE: www.trigoldpower.com

E-MAIL: trigoldpower@163.com



TRIGOLD

上海鑫之机电 TRIGOLD POWER CO.,LTD.



BRIEF INTRODUCTION

We, TRIGOLD POWER CO., LTD. are founded for import & export. We have more than 30 years experience to deal with power products and sale them to all over the world. We have owned our manufacturers to make:

One is for making porcelain insulator up to 500kv transmission line, such as line post, post insulators, LV insulators, suspension insulators. The capacity is about 5000tons per year.

Another one is for making power fittings. We could make different fittings up to 500kv transmission line and substation fittings. The capacity is about 10000tons for different products, such as aluminum alloy clamp, casting and forged steel products, malleable iron products, preformed armor rod, PG clamp and so on.

Last one is our polymer insulator factory, who makes different polymer insulators up to 500kv. Such as suspension insulators, pin type insulators, line post, post station, fuse cut out, arrester and so on. The capacity is about USD 5millions per year.

Our all manufacturers have the ISO quality assurance system and ISO9001 certificate. We could supply various products in accordance with IEC, ANSI, ASTM, AS, BS, DIN and ISO standards.

Our Business Scope:

All kinds of Electric & Machinery Products.

Apparatuses of Distribution Station and Sub-station.

Angle Steel and Steel Tube Tower for Transmission Line and Communication.

HV and LV Power Cables Such as ACSR AAC, AAAC, AACSR, ACAR and XLPE.

Porcelain Suspension (Disc) Insulators, Pin Type, Post Type and Other LV Insulators.

Toughened Glass Suspension Insulators.

Polymer Suspension and Post Insulators.

Oxide Surge Arrester.

Fuse Cut- out.

Power Fittings for Transmission Line and Substation.

Cable Accessories.

We always supply our excellent quality products, reasonable prices and reliable honesty to satisfy the customers. Warmly welcome friends in the all over the world to establish a mutual cooperation relationship with us to reach great development together. We will share with you and hope you share with us. Please do not hesitate to contact with us if you have any requirement.

CONTENTS

01-02 CURRENT CARRYING FITTING

03-03 PROTECTIVE FITTING

04-11 T CONNECTOR

12-33 TERMINAL CONNECTOR


34-51 BUS BAR FITTING

一、接触金具

CURRENT-CARRYING FITTING

全铝母线伸缩节 (MS型母线与母线连接)


Flexible Laminated Connectors (Bus-Bus Type MS)



型号 Catalog NO.	主要尺寸 Dimensions (mm)					重量 Weight (Kg)
	a	b	h	L ₁	L	
MS - 63 × 6.3	63	6.3	50	73	315	0.4
MS - 80 × 6.3	80	6.3	50	90	350	0.5
MS - 80 × 8	80	8.0	50	90	350	0.7
MS - 80 × 10	80	10.0	110	90	370	1.2
MS - 100 × 8	100	8.0	50	115	400	1.0
MS - 100 × 10	100	10.0	60	115	420	1.3
MS - 125 × 8	125	8.0	50	140	470	1.4
MS - 125 × 10	125	10.0	60	140	470	1.8
MS - 125 × 12.5	125	12.5	60	140	470	2.2

铜-铝母线伸缩节 (MSS型母线与设备连接)



Flexible Laminated Connectors (Bus-Equipment, Type MSS)

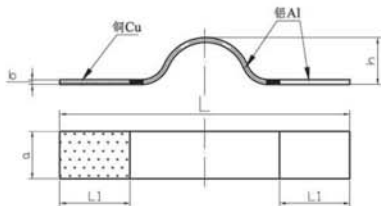

型号 Catalog NO.	主要尺寸 Dimensions (mm)					重量 Weight (Kg)
	a	b	h	L ₁	L	
MSS - 50 × 5	50	5.0	50	75	310	0.4
MSS - 63 × 6.3	63	6.3	50	73	315	0.4
MSS - 80 × 6.3	80	6.3	50	90	350	0.8
MSS - 80 × 8	80	8.0	50	90	350	1.1
MSS - 100 × 8	100	8.0	50	115	400	1.5
MSS - 100 × 10	100	10.0	60	115	420	2.0
MSS - 125 × 8	125	8.0	50	140	450	2.2
MSS - 125 × 10	125	10.0	60	140	470	2.9
MSS - 125 × 12.5	125	12.5	60	140	470	3.4

铜铝过渡板 (MG型)

Al-Cu Transition Connectors (Type MG)

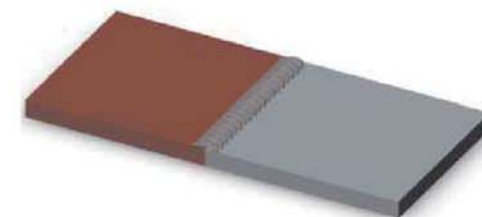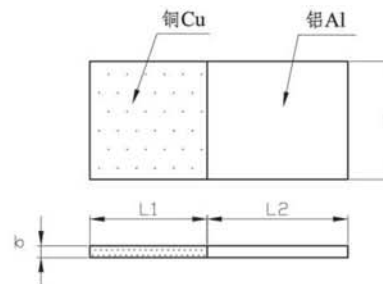


型号 Catalog NO.	适用母线 Conductor Dia.(mm)	主要尺寸 Dimensions (mm)				重量 Weight (Kg)
		a	b	L ₁	L ₂	
MG - 50 × 5	50 × 5	50	5.0	50	60	0.2
MG - 63 × 6.3	63 × 6.3	63	6.3	68	85	0.3
MG - 63 × 8	63 × 8	63	8.0	68	85	0.4
MG - 63 × 10	63 × 10	63	10.0	68	85	0.5
MG - 80 × 6.3	80 × 6.3	80	6.3	85	100	0.5
MG - 80 × 8	80 × 8	80	8.0	85	100	0.7
MG - 80 × 10	80 × 10	80	10.0	85	100	0.8
MG - 100 × 8	100 × 8	100	8.0	105	120	1.0
MG - 100 × 10	100 × 10	100	10.0	105	120	1.3
MG - 125 × 8	125 × 8	125	8.0	130	140	1.5
MG - 125 × 10	125 × 10	125	10.0	130	140	1.9
MG - 125 × 12.5	125 × 12.5	125	12.5	130	140	2.4

二、保护金具 PROTECTIVE FITTING

双分裂间隔棒 (SJ型)


Spacers for Twin-bundle Conductor (Type SJ)



型号 Catalog NO.	适用导线 Suitable Conductor	主要尺寸 Dimensions (mm)				重量 Weight (Kg)
		a	b	L	d	
SJ-51-400	LGKK-600 LGJQT-1400	104	80	400	52	2.8
SJ-51-450		104	80	450	52	3.1

双分裂间隔棒 (SRJ型)

Spacers for Twin-bundle Conductor (Type SRJ)




型号 Catalog NO.	适用导线 Suitable Conductor	主要尺寸 Dimensions (mm)			重量 Weight (Kg)
		a	L	r	
MRJ-4/120	19.02-21.28	50	120	11	0.4
MRJ-5/120	23.70-27.36	60	120	14	0.6
MRJ-6/120	30.16-33.20	70	120	17	0.7
MRJ-4/200	19.02-21.28	50	200	11	0.9
MRJ-5/200	23.70-27.36	60	200	14	1.0
MRJ-6/200	30.16-33.20	70	200	17	1.2
MRJ-4/400	19.02-21.28	50	400	11	2.1
MRJ-5/400	23.70-27.36	60	400	14	2.5
MRJ-6/400	30.16-33.20	70	400	17	2.8

三、T型线夹 T-CONNECTOR

T型线夹 (TY液压型)


T-connectors (Type TY, Hydraulic Compression)



型号 Catalog NO.	适用导线 Suitable Conductor	主要尺寸 Dimensions (mm)			重量 Weight (Kg)
		L1	L2	D	
TY-120/7	LGJ-120/7	115	80	26	1.2
TY-120/20	LGJ-120/20	115	80	26	1.2
TY-150/8	LGJ-150/8	125	90	30	1.3
TY-150/20	LGJ-150/20	125	90	30	1.3
TY-185/10	LGJ-185/10	125	90	32	1.4
TY-185/25	LGJ-185/25	125	90	32	1.4
TY-185/30	LGJ-185/30	125	90	32	1.4
TY-210/10	LGJ-210/10	135	100	34	1.5
TY-210/25	LGJ-210/25	135	100	34	1.5
TY-240/30	LGJ-240/30	135	100	36	1.6
TY-240/40	LGJ-240/40	135	100	36	1.6
TY-300/15	LGJ-300/15	145	110	40	1.7
TY-300/20	LGJ-300/20	145	110	40	1.7
TY-300/25	LGJ-300/25	145	110	40	1.7
TY-300/40	LGJ-300/40	145	110	40	1.7
TY-400/20	LGJ-400/20	155	120	45	1.9
TY-400/30	LGJ-400/30	155	120	45	1.9
TY-400/35	LGJ-400/35	155	120	45	1.9
TY-400/50	LGJ-400/50	155	120	45	1.9
TY-400/65	LGJ-400/65	155	120	45	1.9
TY-500/35	LGJ-500/35	165	130	52	2.3
TY-500/45	LGJ-500/45	165	130	52	2.3
TY-500/65	LGJ-500/65	165	130	52	2.3
TY-630/45	LGJ-630/45	185	150	60	4.2
TY-630/55	LGJ-630/55	185	150	60	4.2
TY-630/80	LGJ-630/80	185	150	60	4.2
TY-800/55	LGJ-800/55	215	170	65	5.5
TY-800/70	LGJ-800/70	210	170	65	5.5
TY-800/100	LGJ-800/100	210	170	65	5.5
TY-300N	NRLH60GJ-300	205	295	50	3.5
TY-400N	NAHLGJQ-400	215	180	55	3.9
TY-500/35N	NAHLGJQ-500/35	290	345	65	6.2
TY-630/45N	NAHLGJQ-630/45	300	365	70	7.0

T型线夹 (TY/TY2液压型)


T-connectors (Type TY/TY2,Hydraulic Compression)

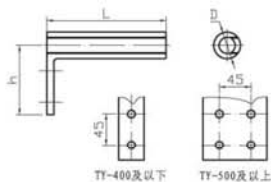

型号 Catalog NO.	适用导线 Suitable Conductor	主要尺寸 Dimensions (mm)			重量 Weight (Kg)
		L	h	D	
TY-240L	LJ-240	170	99	38	0.8
TY2-240	LGJ-240	170	128	38	1.2
TY2-300	LGJ-300, LGJQ-300	180	132	40	1.3
TY2-400	LGJ-400, LGJQ-400	190	140	45	1.4
TY2-500	LGJQ-500	200	139	50	1.7
TY2-600	LGJQ-600	220	142	55	1.9

T型线夹 (TLY型)



T-connectors (Type TLY)



型号 Catalog NO.	适用导线 Suitable Conductor		主要尺寸 Dimensions (mm)				重量 Weight (Kg)
	母线 Run	引下线 Tan	Ø	D	L	L ₁	
TLY-10K/5A(TLY-600K/300)	LGKK-600	LGJ-300	52	40	200	140	5.5
TLY-10K/5A(TLY-600K/400)	LGKK-600	LGJ-400	52	45	204	150	5.8
TLY-10K/10(TLY-600K/600K)	LGKK-600	LGKK-600	52	76	270	190	7.2
TLY-10N/10N(TLY-1000N/1000N)	NRLH58GJ-1000	NRLH58GJ-1000	52	76	300	210	6.5
TLY-10/5A(TLY-1400/300)	LGJQT-1400	LGJ-300	52	40	200	140	5.5
TLY-10/5(TLY-1400/400)	LGJQT-1400	LGJ-400	52	45	204	150	5.8
TLY-10/10(TLY-1400/1400)	LGJQT-1400	LGJQT-1400	52	76	270	190	6.2
TLY-11N/11N(TLY-1400N/1400N)	NALHLGJQ-1440	NALHGJQ-1440	52	80	330	240	11.3
TLY-90K/5(TLY-900K/400)	LGKK-900	LGJ-400	50	80	204	150	5.8
TLY-9K/9(TLY-900K/900K)	LGKK-900	LGKK-900	50	80	270	190	7.2

双导线T型线夹 (TYS型)


T-connectors for Twin-bundle Conductor (Type TYS)

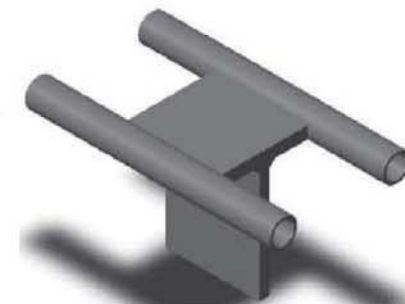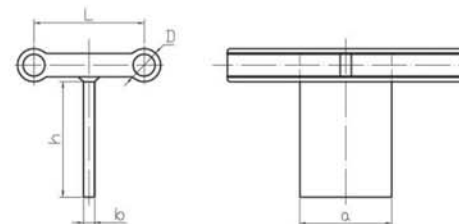

型号 Catalog NO.	适用导线 Suitable Conductor		主要尺寸 Dimensions (mm)					重量 Weight (Kg)
	型号 Catalog No.	外径 Dia.(mm)	D	a	h	b	L	
TYS-2 x 150/120	LGJ-150/25	17.10	30	100	125	12	120	2.3
TYS-2 x 185/120	LGJ-185/45	19.60	32	100	125	12	120	2.2
TYS-2 x 240/120	LGJ-240/30	21.60	36	100	125	12	120	2.3
TYS-2 x 300/120	LGJ-300/40	23.94	40	100	125	12	120	2.8
TYS-2 x 400/120	LGJ-400/50	27.63	45	125	145	12	120	3.9
TYS-2 x 500/120	LGJ-500/45	30.00	52	125	145	16	120	5.7
TYS-2 x 630/120	LGJ-630/45	33.60	60	150	175	16	120	7.1
TYS-2 x 240/200	LGJ-240/30	21.60	36	100	125	12	200	2.7
TYS-2 x 300/200	LGJ-300/40	23.94	40	100	125	12	200	3.2
TYS-2 x 400/200	LGJ-400/50	27.63	45	125	145	12	200	4.2
TYS-2 x 500/200	LGJ-500/45	30.00	52	125	145	16	200	6.1
TYS-2 x 630/200	LGJ-630/45	33.60	60	150	175	16	200	7.5
TYS-2 x 240/400	LGJ-240/30	21.60	36	100	125	12	400	3.8
TYS-2 x 300/400	LGJ-300/40	23.94	40	100	125	12	400	4.3
TYS-2 x 400/400	LGJ-400/50	27.63	45	125	145	12	400	5.4
TYS-2 x 500/400	LGJ-500/45	30.00	52	125	145	16	400	7.1
TYS-2 x 630/400	LGJ-630/45	33.60	60	150	175	16	400	8.5

T型线夹 (TLL型)


T-connectors (Type TLL)

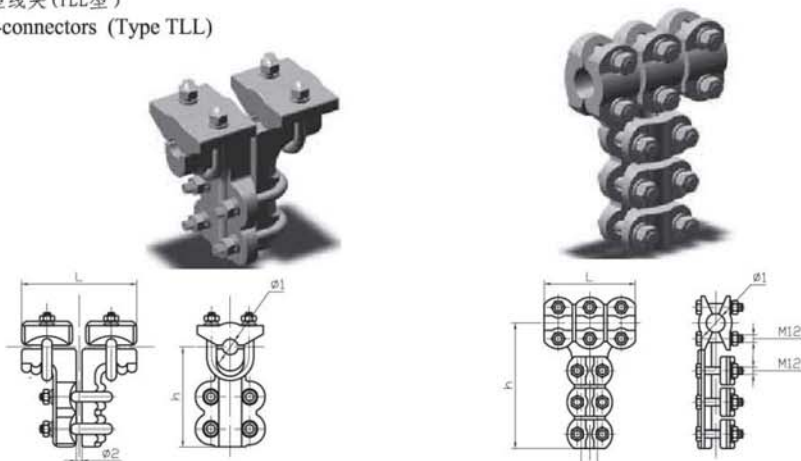图 1
fig. 1图 2
fig. 2

型号 Catalog NO.	适用导线直径 Suitable Conductor Dia.(mm)		主要尺寸 Dimensions (mm)		图示 Fig No.	重量 Weight (Kg)
	Ø1	Ø2	L	h		
TLL-1/1 (TL-11)	7.50-9.60	7.50-9.60	118	102	1	0.7
TLL-2/1 (TL-21)	10.65-13.68	7.50-9.60	118	103	1	0.8
TLL-2/2 (TL-22)	10.65-13.68	10.65-13.68	120	103	1	0.8
TLL-3/1 (TL-31)	14.0-16.72	7.50-9.60	118	117	1	1.1
TLL-3/2 (TL-32)	14.0-16.72	10.65-13.68	120	117	1	1.1
TLL-3/3 (TL-33)	14.0-16.72	14.0-16.72	120	117	1	1.1
TLL-4/1 (TL-41)	17.5-22.4	7.50-9.60	120	117	1	1.1
TLL-4/2 (TL-42)	17.5-22.4	10.65-13.68	120	117	1	1.1
TLL-4/3 (TL-43)	17.5-22.4	14.0-16.72	120	117	1	1.1
TLL-4/4 (TL-44)	17.5-22.4	17.5-22.4	120	117	1	1.2
TLL-5/2 (TL-52)	23.0-29.2	10.65-13.68	146	168	2	1.5
TLL-5/3 (TL-53)	23.0-29.2	14.0-16.72	146	168	2	1.5
TLL-5/4 (TL-54)	23.0-29.2	17.5-22.4	146	190	2	1.5
TLL-5/5 (TL-55)	23.0-39.2	23.0-29.2	146	190	2	4.0
TLL-6/4 (TL-64)	30.0-35.0	17.5-22.4	146	200	2	4.5
TLL-6/5 (TL-65)	30.0-35.0	23.0-29.2	146	200	2	4.5
TLL-6/6 (TL-66)	30.0-35.0	30.0-35.0	146	200	2	4.8
TLL-7/7 (TL-77)	36.0-42.0	36.0-42.0	160	210	2	5.8
TLL-7/4 (TL-74)	30.0-35.0	17.5-22.4	160	210	2	5.9
TLL-8/7 (TL-87)	46.0-52.0	36.0-42.0	320	385	2	14.0
TLL-8/8 (TL-88)	46.0-52.0	46.0-52.0	320	395	2	14.8
TLL-8/5 (TL-800.1)	34.0-39.0	26.0-30.0	230	323	2	7.0

双导线T型线夹 (TLS型)


T-connectors for Twin-bundle Conductor (Type TLS)

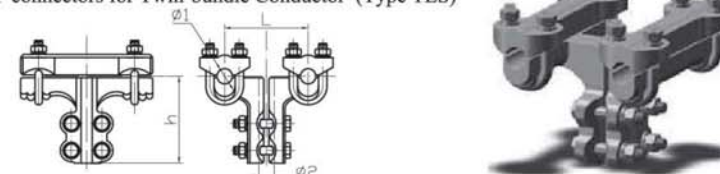

型号 Catalog NO.	适用导线型号 Suitable Conductor Catalog No.	主要尺寸 Dimensions (mm)				重量 Weight (Kg)
		Ø1	Ø2	L	h	
TLL-2x4/4 (TLS-44)	185-240/185-240	22.0	22.0	120	125	3.2
TLS-45	185-240/300-400	22.0	28.0	120	160	3.4
TLS-53	300-400/120-150	28.0	18.0	120	160	3.6
TLS-54	300-400/185-240	28.0	22.0	120	125	3.7
TLS-55	300-400/300-400	28.0	28.0	120	186	3.9
TLS-56	300-400/500-630	28.0	34.5	120	200	4.1
TLS-65	500-630/300-400	34.5	28.0	120	186	4.5
TLS-66	500-630/500-630	34.5	34.5	120	200	4.8

T型线夹 (TL型)



T-connectors (Type TL)

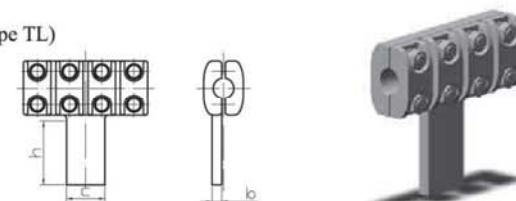

型号 Catalog NO.	适用导线 Suitable Conductor	主要尺寸 Dimensions (mm)			重量 Weight (Kg)
		c	h	b	
TL-4NA (TL-210N)	NAHLGJQ-210	63	105	16	4.5
TL-4N (TL-240N)	NAHLGJQ-240	63	105	16	5.5
TL-5NA (TL-300N)	NAHLGJQ-300	100	100	20	6.6
TL-5N(TL-400N)	NAHLGJQ-400	100	110	20	6.5
TL-6NA (TL-500N)	NAHLGJQ-500	125	125	22	7.2
TL-6N (TL-630N)	NAHLGJQ-630	125	125	22	8.6
TL-10 (TL-1400)	LGJQT-1400	125	120	22	8.2
TL-10N (TL-1440N)	NAHLGJQ-1440	125	150	22	8.9
TL-10K (TL-630K)	LGKK-600	125	130	20	6.0
TL-9K (TL-900K)	LGKK-900	125	105	26	9.6
TL-5A (TL-300)	LGJ-300/15-300/70	63	105	16	3.8
TL-5 (TL-400)	LGJ-400/20-400/50	63	105	16	4.2
TL-6A (TL-500)	LGJ-500/35-500/65	80	105	22	6.1
TL-6 (TL-630)	LGJ-630/35-630/80	100	105	20	6.8
TL-7 (TL-800)	LGJ-800/55-800/100	110	110	22	7.5

T型线夹 (TL型, 配引流)


T-connectors Conductor (Type TL, with jump clamp)



型号 Catalog NO.	适用导线 Suitable Conductor	主要尺寸 Dimensions (mm)		重量 Weight (Kg)
		B	H	
TL-600K/600K	LGKK-600	210	86	6.0
TL-900K/900K	LGKK-900	210	86	9.6
TL-1400/1400	LGJQT-1400/135	210	88	8.2
TL-210N/210N	NAHLGJQ-210/35	158	59	4.5
TL-240N/240N	NAHLGJQ-240/40	214	63	5.2
TL-300N/300N	NAHLGJQ-300/40	250	70	5.8
TL-400N/400N	NAHLGJQ-400/50	270	72	6.5
TL-500N/500N	NAHLGJQ-500/45	320	81	7.2
TL-600N/600N	NAHLGJQ-600/45	320	84	8.3
TL-630N/630N	NAHLGJQ-630/45	320	84	8.8
TL-1440N/1440N	NAHLGJQ-1440/120	296	101	9.7

双导线单引下T型线夹 (TL型)


T-connectors for Twin Bundle Conductor & Single Tap Conductor (Type TL)



型号 Catalog NO.	适用导线 Suitable Conductor	主要尺寸 Dimensions (mm)				重量 Weight (Kg)
		H	C	b	L	
TL-185/120	LGJ-185/10-25	80	50	12	120	1.25
TL-210/120	LGJ-210/10-25	80	50	12	120	1.31
TL-240/120	LGJ-240/30	80	50	14	120	1.5
TL-300/120	LGJ-300/15-40	100	63	16	120	1.5
TL-400/120	LGJ-400/20-50	100	63	16	120	1.6
TL-500/120	LGJ-500/35-26	100	80	18	120	2.3
TL-630/120	LGJ-630/45-80	100	100	18	120	2.7
TL-800/120	LGJ-800/55-100	125	125	20	120	4.8
TL-210N/120	NAHLGJQ-210	105	63	16	120	1.1
TL-400N/120	NAHLGJQ-400	125	125	20	120	5.0
TL-600K/120	LGKK-600	125	125	20	120	5.5
TL-900K/120	LGKK-900	125	125	20	120	8.2
TL-1400/120	LGJQT-1400	125	125	20	120	5.5
TL-185/200	LGJ-185/10-25	80	50	12	200	
TL-210/200	LGJ-210/10-25	80	50	12	200	
TL-240/200	LGJ-240/30	80	50	14	200	1.5
TL-300/200	LGJ-300/15-40	100	63	16	200	1.6
TL-300/200-120	LGJ-300/15-40	120	120	16	200	3.0
TL-300/200-100	LGJ-300/15-40	100	100	16	200	2.8
TL-400/200	LGJ-400/20-50	100	63	16	200	1.7
TL-500/200	LGJ-500/35-26	100	80	18	200	2.3
TL-630/200	LGJ-630/45-80	100	100	18	200	3.9
TL-800/200	LGJ-800/55-100	125	125	20	200	4.3
TL-400N/200 (TL-2x5N/200)	NAHLGJQ-400	125	125	20	200	6.2
TL-500N/200	NAHLGJQ-500	130	125	22	200	7.0
TL-630N/200	NRLH58GJ-630	150	150	24	200	8.8
TL-600K/200 (TL-2x10K/200)	LGKK-600	125	125	20	200	6.9
TL-900K/200 (TL-2x9K/200)	LGKK-900	125	125	22	200	8.2
TL-1000N/200	NRLH58GJ-1000	150	150	24	200	6.2
TL-1400/200 (TL-2x10/200)	LGJQT-1400	125	125	22	200	6.9
TL-1440N/200 (TL-2x10N/200)	NAHLGJQ-1440	150	125	22	200	10.7
TL-240/400	LGJ-240	80	50	14	400	6.5
TL-300/400	LGJ-300	100	63	16	400	6.8
TL-400/400	LGJ-400/20-50	100	63	16	400	6.9
TL-500/400	LGJ-500/35-26	100	80	18	400	7.1
TL-630/400	LGJ-630/45-80	100	100	18	400	7.3
TL-800/400	LGJ-800/55-100	125	125	20	400	7.5
TL-400N/400	NAHLGJQ-1440	125	125	20	400	7.7
TL-600K/400	LGKK-600	125	125	20	400	7.2
TL-900K/400	LGKK-900	125	125	20	400	7.5
TL-1400/400	LGJQT-1400	125	125	20	400	7.2
TL-1440N/400	NAHLGJQ-1440	150	150	24	400	7.5

双导线双引下T型线夹 (TL型)

T-connectors for Twin Bundle Conductor & Tap-Conductors (Type TL)

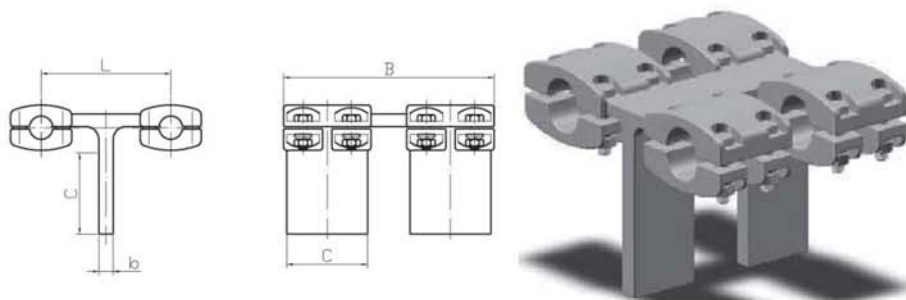


型号 Catalog NO.	适用导线 Suitable Conductor	主要尺寸 Dimensions (mm)				重量 Weight (Kg)
		B	C	b	L	
TL-2x600K/200	LGKK-600	325	125	22	200	13.9
TL-2x900K/200	LGKK-900	325	120	22	200	13.0
TL-2x1400/200	LGJQT-1400	325	125	22	200	13.9
TL-2x1440N/200	NAHLGJQ-1440	340	150	22	200	18.8
TL-2x600K/400	LGKK-600	375	125	22	400	23.5
TL-2x900K/400	LGKK-900	375	120	22	400	23.5
TL-2x1400/400	LGJQT-1400	375	125	22	400	23.5
TL-2x1440N/400	NAHLGJQ-1440	496	150	22	400	25.5

四、设备线夹 TERMINAL CONNECTOR

设备线夹 (SY压缩型A类)


Terminal Connectors (Type SY, Compression, Group A)



型号 Catalog NO.	适用导线 Suitable Conductor		主要尺寸 Dimensions (mm)						
	型号 Catalog No.	外径 Dia.(mm)	a	b	d	L1	L	Ø	
SY-35/6A	LGJ-35/6	8.16	30	8	16	60	60	9.50	
SY-50/8A	LGJ-50/8	9.60	30	8	18	60	60	11.0	
SY-70/10A	LGJ-70/10	11.40	40	8	22	70	60	13.0	
SY-95/15A	LGJ-95/15	13.61	40	8	26	80	60	15.0	
SY-120/7A	LGJ-120/7	14.50	50	10	26	80	80	16.0	
SY-120/20A	LGJ-120/20	15.07	50	10	26	80	80	16.6	
SY-150/8A	LGJ-150/8	16.00	50	10	30	90	80	17.5	
SY-150/20A	LGJ-150/20	16.67	50	10	30	90	80	18.0	
SY-185/10A	LGJ-185/10	18.00	50	12	32	90	80	19.5	
SY-185/25A	LGJ-185/25	18.90	50	12	32	90	80	20.5	
SY-185/30A	LGJ-185/30	18.88	50	12	32	90	80	20.5	
SY-210/10A	LGJ-210/10	19.00	50	12	34	100	80	20.5	
SY-210/25A	LGJ-210/25	19.98	50	12	34	100	80	21.5	
SY-240/30A	LGJ-240/30	21.60	50	12	36	100	80	23.0	
SY-240/40A	LGJ-240/40	21.66	50	12	36	100	80	23.0	
SY-300/15A	LGJ-300/15	23.01	63	16	40	110	100	24.5	
SY-300/20A	LGJ-300/20	23.43	63	16	40	110	100	25.0	
SY-300/25A	LGJ-300/25	23.76	63	16	40	110	100	25.5	
SY-300/40A	LGJ-300/40	23.94	63	16	40	110	100	25.5	
SY-400/20A	LGJ-400/20	26.91	63	16	45	120	100	28.5	
SY-400/25A	LGJ-400/25	26.64	63	16	45	120	100	28.5	
SY-400/35A	LGJ-400/35	26.82	63	16	45	120	100	28.5	
SY-400/50A	LGJ-400/50	27.63	63	16	45	120	100	29.5	
SY-500/35A	LGJ-500/35	30.00	80	16	52	130	100	31.5	
SY-500/45A	LGJ-500/45	30.00	80	16	52	130	100	31.5	
SY-500/65A	LGJ-500/65	30.96	80	16	52	130	100	32.5	
SY-630/45A	LGJ-630/45	33.60	100	20	60	150	100	35.5	
SY-630/55A	LGJ-630/55	34.32	100	20	60	150	100	36.0	
SY-800/55A	LGJ-800/55	38.40	125	22	65	170	125	40.0	
SY-800/70A	LGJ-800/70	38.58	125	22	65	170	125	40.5	
SY-800/100A	LGJ-800/100	38.98	125	22	65	170	125	40.5	

设备线夹 (SY压缩型B类)



Terminal Connectors (Type SY, Compression, Group B)



型号 Catalog NO.	适用导线 Suitable Conductor		主要尺寸 Dimensions (mm)						
	型号 Catalog No.	外径 Dia.(mm)	a	b	d	L ₁	L	Ø	
SY-35/6B	LGJ-35/6	8.16	30	8	16	60	60	9.50	
SY-50/8B	LGJ-50/8	9.60	30	8	18	60	60	11.0	
SY-70/10B	LGJ-70/10	11.40	40	8	22	70	60	13.0	
SY-95/15B	LGJ-95/15	13.61	40	8	26	80	60	15.0	
SY-120/7B	LGJ-120/7	14.50	50	10	26	80	80	16.0	
SY-120/20B	LGJ-120/20	15.07	50	10	26	80	80	16.6	
SY-150/8B	LGJ-150/8	16.00	50	10	30	90	80	17.5	
SY-150/20B	LGJ-150/20	16.67	50	10	30	90	80	18.0	
SY-185/10B	LGJ-185/10	18.00	50	12	32	90	80	19.5	
SY-185/25B	LGJ-185/25	18.90	50	12	32	90	80	20.5	
SY-185/30B	LGJ-185/30	18.88	50	12	32	90	80	20.5	
SY-210/10B	LGJ-210/10	19.00	50	12	34	100	80	20.5	
SY-210/25B	LGJ-210/25	19.98	50	12	34	100	80	21.5	
SY-240/30B	LGJ-240/30	21.60	50	12	36	100	80	23.0	
SY-240/40B	LGJ-240/40	21.66	50	12	36	100	80	23.0	
SY-300/15B	LGJ-300/15	23.01	63	16	40	110	100	24.5	
SY-300/20B	LGJ-300/20	23.43	63	16	40	110	100	25.0	
SY-300/25B	LGJ-300/25	23.76	63	16	40	110	100	25.5	
SY-300/40B	LGJ-300/40	23.94	63	16	40	110	100	25.5	
SY-400/20B	LGJ-400/20	26.91	63	16	45	120	100	28.5	
SY-400/25B	LGJ-400/25	26.64	63	16	45	120	100	28.5	
SY-400/35B	LGJ-400/35	26.82	63	16	45	120	100	28.5	
SY-400/50B	LGJ-400/50	27.63	63	16	45	120	100	29.5	
SY-500/35B	LGJ-500/35	30.00	80	16	52	130	100	31.5	
SY-500/45B	LGJ-500/45	30.00	80	16	52	130	100	31.5	
SY-500/65B	LGJ-500/65	30.96	80	16	52	130	100	32.5	
SY-630/45B	LGJ-630/45	33.60	100	20	60	150	100	35.5	
SY-630/55B	LGJ-630/55	34.32	100	20	60	150	100	36.0	
SY-800/55B	LGJ-800/55	38.40	125	22	65	170	125	40.0	
SY-800/70B	LGJ-800/70	38.58	125	22	65	170	125	40.5	
SY-800/100B	LGJ-800/100	38.98	125	22	65	170	125	40.5	

设备线夹 (SY压缩型C类)


Terminal Connectors (Type SY, Compression, Group C)



型号 Catalog NO.	适用导线 Suitable Conductor		主要尺寸 Dimensions (mm)						
	型号 Catalog No.	外径 Dia.(mm)	a	b	d	L ₁	L	Ø	
SY-120/7D(C)	LGJ-120/7	14.50	50	10	26	115	80	16.0	
SY-120/20D(C)	LGJ-120/20	15.07	50	10	26	115	80	16.6	
SY-150/8C	LGJ-150/8	16.00	50	10	30	125	80	17.5	
SY-150/20C	LGJ-150/20	16.67	50	10	30	125	80	18.0	
SY-185/10C	LGJ-185/10	18.00	50	12	32	125	80	19.5	
SY-185/25C	LGJ-185/25	18.90	50	12	32	125	80	20.5	
SY-185/30C	LGJ-185/30	18.88	50	12	32	125	80	20.5	
SY-210/10C	LGJ-210/10	19.00	50	12	34	135	80	20.5	
SY-210/25C	LGJ-210/25	19.98	50	12	34	135	80	21.5	
SY-240/30C	LGJ-240/30	21.60	50	12	36	135	80	23.0	
SY-240/40C	LGJ-240/40	21.66	50	12	36	135	80	23.0	
SY-300/15C	LGJ-300/15	23.01	63	16	40	145	100	24.5	
SY-300/20C	LGJ-300/20	23.43	63	16	40	145	100	25.0	
SY-300/25B	LGJ-300/25	23.76	63	16	40	145	100	25.5	
SY-300/40C	LGJ-300/40	23.94	63	16	40	145	100	25.5	
SY-400/20B	LGJ-400/20	26.91	63	16	45	155	100	28.5	
SY-400/25C	LGJ-400/25	26.64	63	16	45	155	100	28.5	
SY-400/35C	LGJ-400/35	26.82	63	16	45	155	100	28.5	
SY-400/50C	LGJ-400/50	27.63	63	16	45	155	100	29.5	
SY-500/35C	LGJ-500/35	30.00	80	16	52	165	100	31.5	
SY-500/45C	LGJ-500/45	30.00	80	16	52	165	100	31.5	
SY-630/45C	LGJ-630/45	33.60	100	20	60	185	100	35.5	
SY-630/55C	LGJ-630/55	34.32	100	20	60	185	100	36.0	
SY-800/55C	LGJ-800/55	38.40	125	22	65	210	125	40.0	
SY-800/70C	LGJ-800/70	38.58	125	22	65	210	125	40.5	
SY-800/100C	LGJ-800/100	38.98	125	22	65	210	125	40.5	

铜铝过渡设备线夹 (SYG压缩型A类)


Al-Cu Terminal Connectors (Type SYG, Compression, Group A)

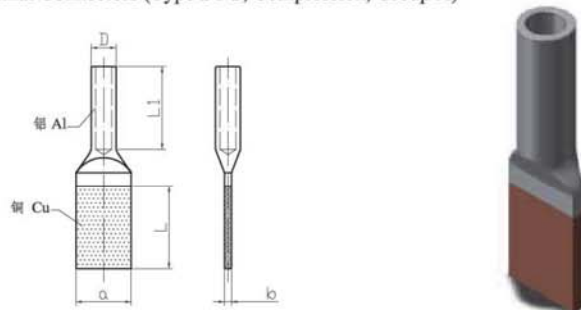

型号 Catalog NO.	适用导线 Suitable Conductor	主要尺寸 Dimensions (mm)					重量 Weight (Kg)
		a	b	D	L1	L	
SYG-50A	LGJ-50	40	5.0	18	60	60	0.2
SYG-70A	LGJ-70	40	5.0	22	70	80	0.3
SYG-95A	LGJ-95	40	5.0	26	80	80	0.3
SYG-120A	LGJ-120	50	8.0	26	80	85	0.5
SYG-150A	LGJ-150	50	8.0	32	90	85	0.6
SYG-185A	LGJ-185	50	8.0	32	90	85	0.6
SYG-120/7A	LGJ-120/7	50	6.3	26	80	80	0.3
SYG-120/20A	LGJ-120/20	50	6.3	26	80	80	0.3
SYG-150/8A	LGJ-150/8	50	6.3	30	90	80	0.3
SYG-150/20A	LGJ-150/20	50	6.3	30	90	80	0.3
SYG-185/10A	LGJ-185/10	50	6.3	32	90	80	0.4
SYG-185/25A	LGJ-185/25	50	6.3	32	90	80	0.4
SYG-185/30A	LGJ-185/30	50	6.3	32	90	80	0.4
SYG-210/10A	LGJ-210/10	50	8.0	34	100	80	0.4
SYG-210/25A	LGJ-210/25	50	8.0	34	100	80	0.4
SYG-240/30A	LGJ-240/30	50	8.0	36	100	80	0.4
SYG-240/40A	LGJ-240/40	50	10	36	100	80	0.4
SYG-300/15A	LGJ-300/15	63	10	40	110	100	0.7
SYG-300/20A	LGJ-300/20	63	10	40	110	100	0.7
SYG-300/25A	LGJ-300/25	63	10	40	110	100	0.7
SYG-300/40A	LGJ-300/40	63	10	40	110	100	0.7
SYG-400/20A	LGJ-400/20	63	10	45	120	100	0.8
SYG-400/25A	LGJ-400/25	63	10	45	120	100	0.8
SYG-400/35A	LGJ-400/35	63	10	45	120	100	0.8
SYG-400/50A	LGJ-400/50	63	10	45	120	100	0.8
SYG-500/35A	LGJ-500/35	80	10	52	130	100	1.0
SYG-500/45A	LGJ-500/45	80	10	52	130	100	1.0
SYG-500/65A	LGJ-500/65	80	10	52	130	100	1.0
SYG-630/45A	LGJ-630/45	100	10	60	150	100	1.6
SYG-630/55A	LGJ-630/55	100	10	60	150	100	1.6
SYG-630/80A	LGJ-630/80	100	10	60	150	100	1.6
SYG-800/55A	LGJ-800/55	125	12.5	65	170	125	2.9
SYG-800/70A	LGJ-800/70	125	12.5	65	170	125	2.9
SYG-800/100A	LGJ-800/100	125	12.5	65	170	125	2.9

铜铝过渡设备线夹 (A覆铜搪锡)


Al-Cu Transition Connectors (Type SYG, Compression)

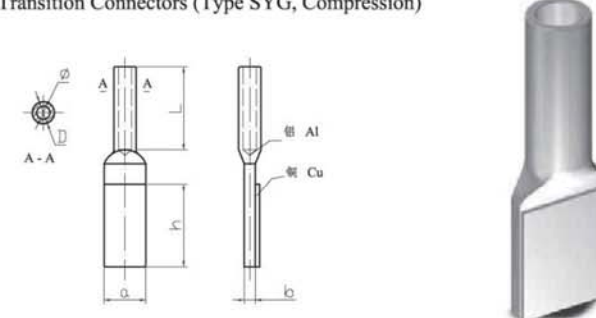

型号 Catalog NO.	适用导线 Suitable Conductor	主要尺寸 Dimensions (mm)						重量 Weight (Kg)
		a	h	b	D	Ø	L	
SYG-35/6AQ	LGJ-35/6	30	60	8	16	9.50	60	0.11
SYG-50/8AQ	LGJ-50/8	30	50	8	18	11.0	60	0.10
SYG-70/10AQ	LGJ-70/10	40	60	8	22	13.0	70	0.22
SYG-95/15AQ	LGJ-95/15	40	60	8	26	15.0	80	0.22
SYG-120/7AQ	LGJ-120/7	50	80	10	26	16.0	80	0.27
SYG-120/20AQ	LGJ-120/20	50	80	10	26	16.6	80	0.27
SYG-120/25AQ	LGJ-120/25	50	80	10	26	17.0	80	0.26
SYG-150/8AQ	LGJ-150/8	50	80	10	30	17.5	90	0.32
SYG-150/20AQ	LGJ-150/20	50	80	10	30	18.0	90	0.32
SYG-150/25AQ	LGJ-150/25	50	80	10	30	18.5	90	0.31
SYG-185/10AQ	LGJ-185/10	50	80	12	32	19.5	90	0.40
SYG-185/25AQ	LGJ-185/25	50	80	12	32	20.5	90	0.39
SYG-185/30AQ	LGJ-185/30	50	80	12	32	20.5	90	0.39
SYG-210/10AQ	LGJ-210/10	50	80	12	34	20.5	100	0.50
SYG-210/25AQ	LGJ-210/25	50	80	12	34	21.5	100	0.49
SYG-240/30AQ	LGJ-240/30	50	80	12	36	23.0	100	0.59
SYG-240/40AQ	LGJ-240/40	50	80	16	36	23.0	100	0.59
SYG-300/15AQ	LGJ-300/15	63	100	16	40	24.5	110	0.73
SYG-300/20AQ	LGJ-300/20	63	100	16	40	25.0	110	0.72
SYG-300/25AQ	LGJ-300/25	63	100	16	40	25.5	110	0.72
SYG-300/40AQ	LGJ-300/40	63	100	16	40	25.5	110	0.72
SYG-400/20AQ	LGJ-400/20	63	100	12	45	28.5	120	0.83
SYG-400/25AQ	LGJ-400/25	63	100	12	45	28.5	120	0.83
SYG-400/35AQ	LGJ-400/35	63	100	12	45	28.5	120	0.83
SYG-400/50AQ	LGJ-400/50	63	100	12	45	29.5	120	0.80
SYG-500/35AQ	LGJ-500/35	80	80	16	52	31.5	130	1.08
SYG-500/45AQ	LGJ-500/45	80	80	16	52	31.5	130	1.08
SYG-500/65AQ	LGJ-500/65	80	80	16	52	32.5	130	1.07
SYG-630/45AQ	LGJ-630/45	100	100	20	60	35.5	150	1.75
SYG-630/55AQ	LGJ-630/55	100	100	20	60	36.0	150	1.71
SYG-630/80AQ	LGJ-630/80	100	100	20	60	36.5	150	1.70
SYG-800/55AQ	LGJ-800/55	125	125	22	65	40.0	170	2.66
SYG-800/70AQ	LGJ-800/70	125	125	22	65	40.5	170	2.56
SYG-800/100AQ	LGJ-800/100	125	125	22	65	40.5	170	2.56

铜铝过渡设备线夹 (SYG压缩型B类)


Al-Cu Terminal Connectors (Type SYG, Compression, Group B)



型号 Catalog NO.	适用导线 Suitable Conductor	主要尺寸 Dimensions (mm)					重量 Weight (Kg)
		a	b	D	L ₁	L	
SYG-50B	LGJ-50	40	5.0	18	60	60	0.2
SYG-70B	LGJ-70	40	5.0	22	70	80	0.3
SYG-95B	LGJ-95	40	5.0	26	80	80	0.3
SYG-120B	LGJ-120	50	8.0	26	80	85	0.5
SYG-150B	LGJ-150	50	8.0	32	90	85	0.6
SYG-185B	LGJ-185	50	8.0	32	90	85	0.6
SYG-120/7B	LGJ-120/7	50	6.3	26	80	80	0.3
SYG-120/20B	LGJ-120/20	50	6.3	26	80	80	0.3
SYG-150/8B	LGJ-150/8	50	6.3	30	90	80	0.3
SYG-150/20B	LGJ-150/20	50	6.3	30	90	80	0.3
SYG-185/10B	LGJ-185/10	50	6.3	32	90	80	0.4
SYG-185/25B	LGJ-185/25	50	6.3	32	90	80	0.4
SYG-185/30B	LGJ-185/30	50	6.3	32	90	80	0.4
SYG-210/10B	LGJ-210/10	50	8.0	34	100	80	0.4
SYG-210/25B	LGJ-210/25	50	8.0	34	100	80	0.4
SYG-240/30B	LGJ-240/30	50	8.0	36	100	80	0.4
SYG-240/40B	LGJ-240/40	50	10	36	100	80	0.4
SYG-300/15B	LGJ-300/15	63	10	40	110	100	0.7
SYG-300/20B	LGJ-300/20	63	10	40	110	100	0.7
SYG-300/25B	LGJ-300/25	63	10	40	110	100	0.7
SYG-300/40B	LGJ-300/40	63	10	40	110	100	0.7
SYG-400/20B	LGJ-400/20	63	10	45	120	100	0.8
SYG-400/25B	LGJ-400/25	63	10	45	120	100	0.8
SYG-400/35B	LGJ-400/35	63	10	45	120	100	0.8
SYG-400/50B	LGJ-400/50	63	10	45	120	100	0.8
SYG-500/35B	LGJ-500/35	80	10	52	130	100	1.0
SYG-500/45B	LGJ-500/45	80	10	52	130	100	1.0
SYG-500/65B	LGJ-500/65	80	10	52	130	100	1.0
SYG-630/45B	LGJ-630/45	100	10	60	150	100	1.6
SYG-630/55B	LGJ-630/55	100	10	60	150	100	1.6
SYG-630/80B	LGJ-630/80	100	10	60	150	100	1.6
SYG-800/55B	LGJ-800/55	125	12.5	65	170	125	3.0
SYG-800/70B	LGJ-800/70	125	12.5	65	170	125	3.1
SYG-800/100B	LGJ-800/100	125	12.5	65	170	125	3.1

铜铝过渡设备线夹 (30° 覆铜搪锡)


Al-Cu Transition Connectors (Type SYG, Compression Group B)



型号 Catalog NO.	适用导线 Suitable Conductor	主要尺寸 Dimensions (mm)						重量 Weight (Kg)
		a	h	b	D	Ø	L	
SYG-35/6BQ	LGJ-35/6	30	60	8	16	9.50	60	0.11
SYG-50/8BQ	LGJ-50/8	30	60	8	18	11.0	60	0.10
SYG-70/10BQ	LGJ-70/10	40	60	8	22	13.0	70	0.22
SYG-95/15BQ	LGJ-95/15	40	60	10	26	15.0	80	0.22
SYG-120/7BQ	LGJ-120/7	50	80	10	26	16.0	80	0.27
SYG-120/20BQ	LGJ-120/20	50	80	10	26	16.6	80	0.27
SYG-120/25BQ	LGJ-120/25	50	80	10	26	17.0	80	0.26
SYG-150/8BQ	LGJ-150/8	50	80	10	30	17.5	90	0.32
SYG-150/20BQ	LGJ-150/20	50	80	10	30	18.0	90	0.32
SYG-150/25BQ	LGJ-150/25	50	80	10	30	18.5	90	0.31
SYG-185/10BQ	LGJ-185/10	50	80	12	32	19.5	90	0.40
SYG-185/25BQ	LGJ-185/25	50	80	12	32	20.5	90	0.39
SYG-185/30BQ	LGJ-185/30	50	80	12	32	20.5	90	0.39
SYG-210/10BQ	LGJ-210/10	50	80	12	34	20.5	100	0.50
SYG-210/25BQ	LGJ-210/25	50	80	12	34	21.5	100	0.49
SYG-240/30BQ	LGJ-240/30	50	80	12	36	23.0	100	0.59
SYG-240/40BQ	LGJ-240/40	50	80	16	36	23.0	100	0.59
SYG-300/15BQ	LGJ-300/15	63	100	16	40	24.5	110	0.73
SYG-300/20BQ	LGJ-300/20	63	100	16	40	25.0	110	0.72
SYG-300/25BQ	LGJ-300/25	63	100	16	40	25.5	110	0.72
SYG-300/40BQ	LGJ-300/40	63	100	16	40	25.5	110	0.72
SYG-400/20BQ	LGJ-400/20	63	100	16	45	28.5	120	0.83
SYG-400/25BQ	LGJ-400/25	63	100	16	45	28.5	120	0.83
SYG-400/35BQ	LGJ-400/35	63	100	16	45	28.5	120	0.83
SYG-400/50BQ	LGJ-400/50	63	100	16	45	29.5	120	0.80
SYG-500/35BQ	LGJ-500/35	80	80	16	52	31.5	130	1.08
SYG-500/45BQ	LGJ-500/45	80	80	16	52	31.5	130	1.08
SYG-500/65BQ	LGJ-500/65	80	80	16	52	32.5	130	1.07
SYG-630/45BQ	LGJ-630/45	100	100	20	60	35.5	150	1.75
SYG-630/55BQ	LGJ-630/55	100	100	20	60	36.0	150	1.71
SYG-630/80BQ	LGJ-630/80	100	100	20	60	36.5	150	1.70
SYG-800/55BQ	LGJ-800/55	125	125	22	65	40.0	170	2.66
SYG-800/70BQ	LGJ-800/70	125	125	22	65	40.5	170	2.56
SYG-800/100BQ	LGJ-800/100	125	125	22	65	40.5	170	2.56

铜铝过渡设备线夹 (SYG压缩型CQ类覆铜搪锡)


Al-Cu Transition Connectors (Type SYG, Compression, Group CQ)

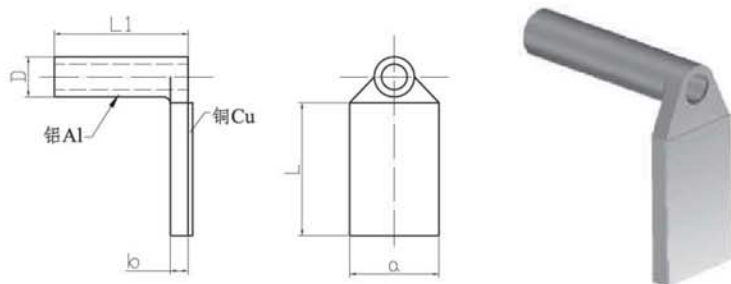

型号 Catalog NO.	适用导线 Suitable Conductor	主要尺寸 Dimensions (mm)					重量 Weight (Kg)
		a	b	D	L1	L	
SYG-50CQ	LGJ-50	40	8	18	60	60	0.2
SYG-70CQ	LGJ-70	40	8	22	70	80	0.3
SYG-95CQ	LGJ-95	40	8	26	80	80	0.3
SYG-120CQ	LGJ-120	50	10	26	80	85	0.5
SYG-150CQ	LGJ-150	50	10	32	90	85	0.6
SYG-185CQ	LGJ-185	50	12	32	90	85	0.6
SYG-120/7CQ	LGJ-120/7	50	12	26	80	80	0.3
SYG-120/20CQ	LGJ-120/20	50	10	26	80	80	0.3
SYG-150/8CQ	LGJ-150/8	50	10	30	90	80	0.3
SYG-150/20CQ	LGJ-150/20	50	10	30	90	80	0.3
SYG-185/10CQ	LGJ-185/10	50	12	32	90	80	0.4
SYG-185/25CQ	LGJ-185/25	50	12	32	90	80	0.4
SYG-185/30CQ	LGJ-185/30	50	12	32	90	80	0.4
SYG-210/10CQ	LGJ-210/10	50	12	34	100	80	0.4
SYG-210/25CQ	LGJ-210/25	50	12	34	100	80	0.4
SYG-240/30CQ	LGJ-240/30	50	12	36	100	80	0.4
SYG-240/40CQ	LGJ-240/40	50	12	36	100	80	0.4
SYG-300/15CQ	LGJ-300/15	63	16	40	110	100	0.7
SYG-300/20CQ	LGJ-300/20	63	16	40	110	100	0.7
SYG-300/25CQ	LGJ-300/25	63	16	40	110	100	0.7
SYG-300/40CQ	LGJ-300/40	63	16	40	110	100	0.7
SYG-400/20CQ	LGJ-400/20	63	16	45	120	100	0.8
SYG-400/25CQ	LGJ-400/25	63	16	45	120	100	0.8
SYG-400/35CQ	LGJ-400/35	63	16	45	120	100	0.8
SYG-400/50CQ	LGJ-400/50	63	16	45	120	100	0.8
SYG-500/35CQ	LGJ-500/35	80	16	52	130	100	1.0
SYG-500/45CQ	LGJ-500/45	80	16	52	130	100	1.0
SYG-500/65CQ	LGJ-500/65	80	16	52	130	100	1.0
SYG-630/45CQ	LGJ-630/45	100	20	60	150	100	1.6
SYG-630/55CQ	LGJ-630/55	100	20	60	150	100	1.6
SYG-630/80CQ	LGJ-630/80	100	20	60	150	100	1.6
SYG-800/55CQ	LGJ-800/55	125	22	65	175	125	2.9
SYG-800/70CQ	LGJ-800/70	125	22	65	175	125	2.9
SYG-800/100CQ	LGJ-800/100	125	22	65	175	125	2.9

耐热导线铜铝过渡设备线夹 (SYG型B类)


Al-Cu Transition Connectors for Heat-resistant Conductor (Type SYG, Group B)

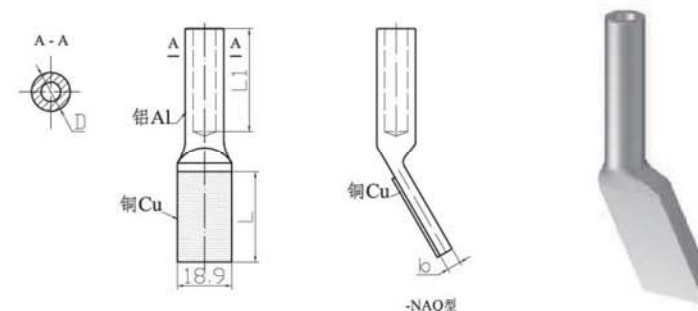

型号 Catalog NO.	适用导线 Suitable Conductor	主要尺寸 Dimensions (mm)					重量 Weight (Kg)
		a	b	D	L1	L	
SYG - 210 / 10NB	NRLH GJ ₂₅ - 210/10	63	16	45	120	105	
SYG - 300 / 50NB	NRLH GJ ₂₅ - 300/50	100	18	50	170	110	
SYG - 400 / 50NB	NRLH GJ ₂₅ - 400/50	100	20	55	200	110	
SYG - 500 / 35NB	NRLH GJ ₂₅ - 500/35	125	22	60	220	125	
SYG - 500 / 65NB	NRLH GJ ₂₅ - 500/65	125	22	60	220	125	
SYG - 630 / 45NB	NRLH GJ ₂₅ - 630/45	125	22	70	240	135	
SYG - 630 / 80NB	NRLH GJ ₂₅ - 630/80	125	22	70	240	135	

耐热导线铜铝过渡设备线夹 (SYG型C类)

Al-Cu Transition Connectors for Heat-resistant Conductor (Type SYG, Group C)

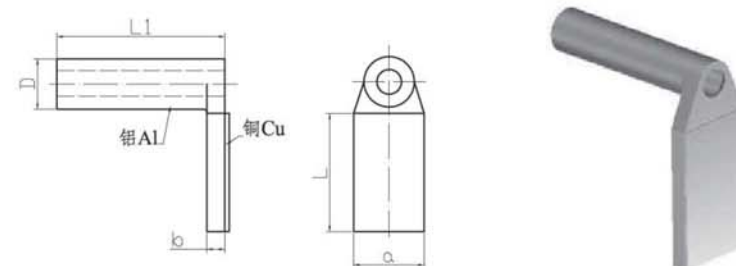

型号 Catalog NO.	适用导线 Suitable Conductor	主要尺寸 Dimensions (mm)					重量 Weight (Kg)
		a	b	D	L1	L	
SYG - 210 / 10NCQ	NRLH GJ ₂₅ - 210/10	63	16	45	150	105	
SYG - 300 / 50NCQ	NRLH GJ ₂₅ - 300/50	100	18	50	200	110	
SYG - 400 / 50NCQ	NRLH GJ ₂₅ - 400/50	100	20	55	220	110	
SYG - 500 / 35NCQ	NRLH GJ ₂₅ - 500/35	125	22	60	240	125	
SYG - 500 / 65NCQ	NRLH GJ ₂₅ - 500/65	125	22	60	240	125	
SYG - 630 / 45NCQ	NRLH GJ ₂₅ - 630/45	125	22	70	250	135	
SYG - 630 / 80NCQ	NRLH GJ ₂₅ - 630/80	125	22	70	250	135	

螺栓型设备线夹 (SL型A类)


Terminal Connectors (Type SL, Bolted, Group A)



型号 Catalog NO.	适用导线直径 Suitable Conductor Dia.(mm)	螺栓个数 Bolt Qty (pc.)	主要尺寸 Dimensions (mm)				重量 Weight (Kg)
			a	b	L ₁	L	
SL-1A	8.40-9.60	4	40	6	65	145	0.3
SL-2A	11.40-13.68	4	40	6	80	175	0.4
SL-3A	15.20-16.72	6	50	8	125	225	0.5
SL-4A	19.02-21.28	6	50	8	125	225	0.5

螺栓型设备线夹 (SL型B类)


Terminal Connectors (Type SL, Bolted, Group B)

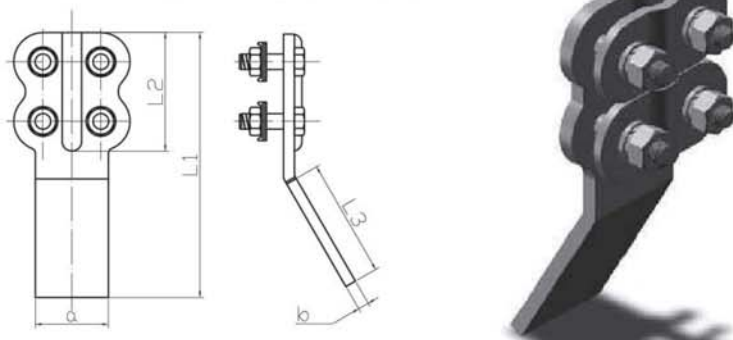

型号 Catalog NO.	适用导线直径 Suitable Conductor Dia.(mm)	螺栓个数 Bolt Qty (pc.)	主要尺寸 Dimensions (mm)					重量 Weight (Kg)
			a	b	L ₁	L ₂	L ₃	
SL-1B	8.40-9.60	4	40	6	145	65	65	0.3
SL-2B	11.40-13.68	4	40	6	175	80	80	0.4
SL-3B	15.20-16.72	6	50	8	225	125	85	0.5
SL-4B	19.02-21.28	6	50	8	225	125	85	0.5

螺栓型设备线夹 (SL型C类)


Terminal Connectors (Type SL, Bolted, Group C)

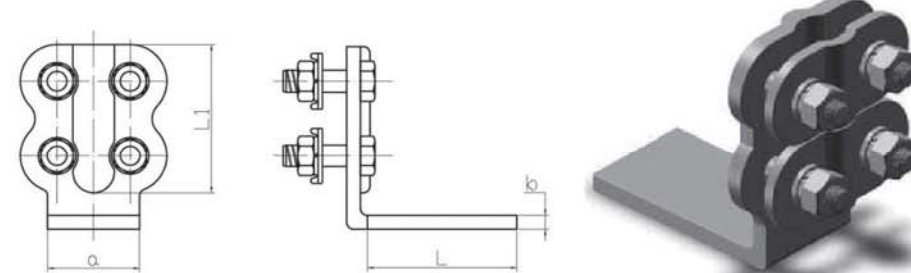

型号 Catalog NO.	适用导线直径 Suitable Conductor Dia.(mm)	主要尺寸 Dimensions (mm)				重量 Weight (Kg)
		a	b	L ₁	L	
SL-1C	35-50	40	6	65	65	0.34
SL-2C	70-95	40	6	80	80	0.38
SL-3C	120-150	50	8	85	125	0.61
SL-4C	185-240	50	8	85	125	0.64

铜铝过渡设备线夹 (0° 覆铜搪锡, SLG-AQ螺栓型)


Aluminium-Copper Teminal Clamps (Type SYG-AQ, Bolted, Group 0)

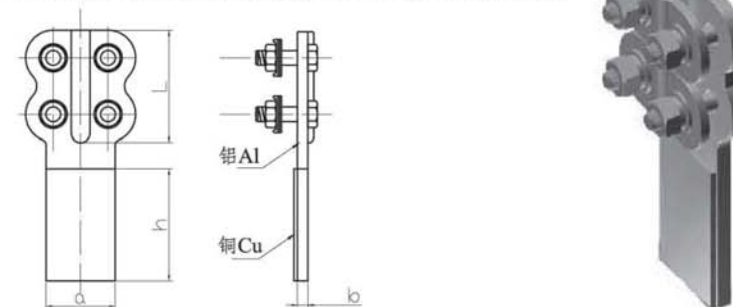

型号 Catalog NO.	适用导线直径 Suitable Conductor Dia.(mm)	主要尺寸 Dimensions (mm)				重量 Weight (Kg)
		a	h	b	L	
SLG-1AQ	35-50	40	65	6	65	0.38
SLG-2AQ	70-95	40	80	6	80	0.43
SLG-3AQ	120-150	50	85	8	125	0.69
SLG-4AQ	185-240	50	85	8	125	0.78

螺栓型设备线夹 (SL型A类)


Terminal Connectors (Type SL, Bolted, Group A)

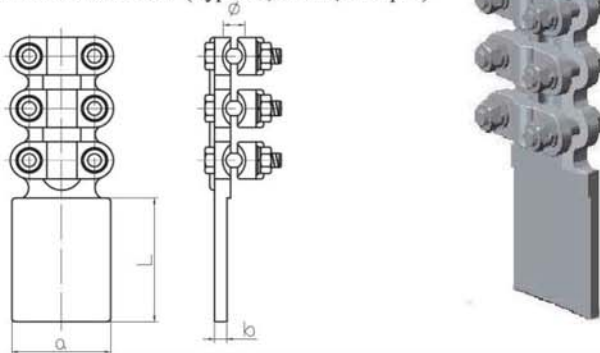

型号 Catalog NO.	适用导线 Suitable Conductor		主要尺寸 Dimensions (mm)				重量 Weight (Kg)
	型号 Catalog No.	外径 Dia.(mm)	a	L	b	Ø	
SL-3A-80	LGJ-120-150	14.5-17.5	80	100	10	17	1.8
SL-4A-80	LGJ-185-240	18.9-21.4	80	100	10	22	2.0
SL-5A-80	LGJ-300-400	23.0-28.0	80	100	16	28	2.1
SL-6A-100	LGJ-500-630	30.0-34.5	100	100	16	35	2.4

螺栓型设备线夹 (SL型B类)


Terminal Connectors (Type SL, Bolted, Group B)

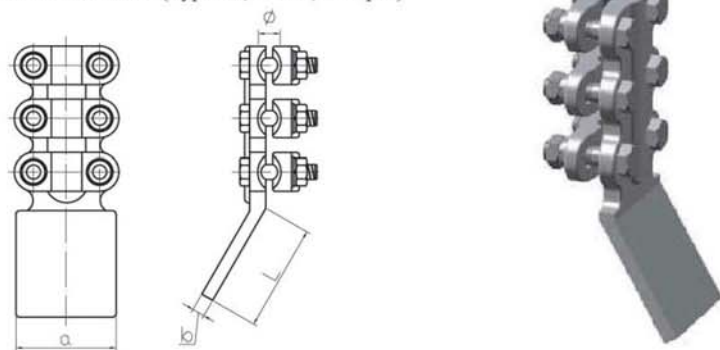

型号 Catalog NO.	适用导线 Suitable Conductor		主要尺寸 Dimensions (mm)				重量 Weight (Kg)
	型号 Catalog No.	外径 Dia.(mm)	a	L	b	Ø	
SL-3B-80	LGJ-120-150	14.5-17.5	80	85	10	17	1.8
SL-4B-80	LGJ-185-240	18.9-21.4	80	85	10	22	2.0
SL-5B-80	LGJ-300-400	23.0-28.0	80	85	16	28	2.1
SL-6B-100	LGJ-500-630	30.0-34.5	100	105	16	35	2.4

铜铝过渡设备线夹 (30° SLG-BQ螺栓型)


Aluminium-Copper Terminal Clamps (Type SYG-AQ, Bolted, Group 30)

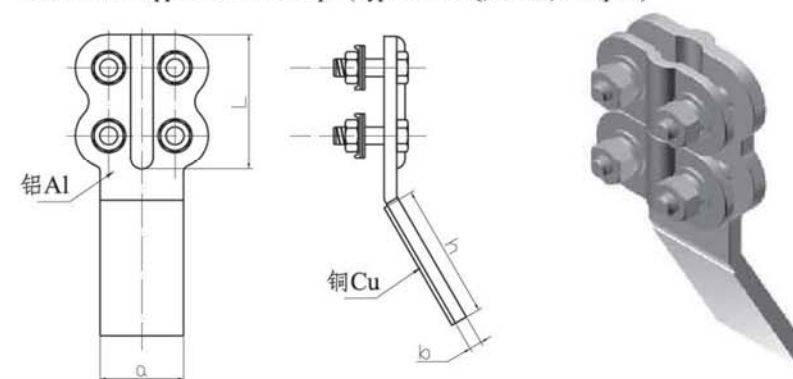

型号 Catalog NO.	适用导线直径 Suitable Conductor Dia.(mm)	主要尺寸 Dimensions (mm)				重量 Weight (Kg)
		a	h	b	L	
SLG-1BQ	35-50	40	65	6	65	0.38
SLG-2BQ	70-95	40	80	6	80	0.43
SLG-3BQ	120-150	50	85	8	125	0.69
SLG-4BQ	185-240	50	85	8	125	0.78


铜铝过渡设备线夹 (90° SLG-CQ螺栓型)

Aluminium-Copper Terminal Clamps (Type SYG-AQ, Bolted, Group 90)

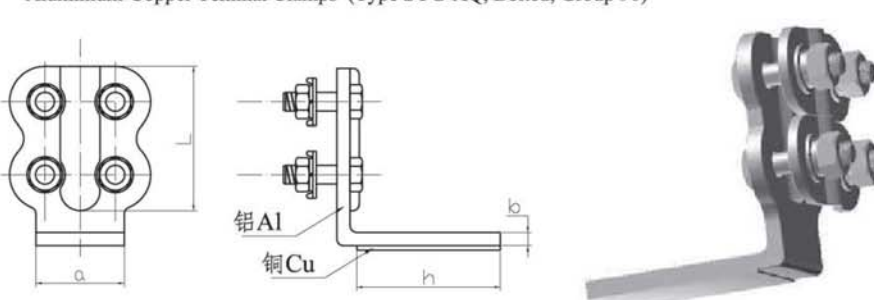


型号 Catalog NO.	适用导线直径 Suitable Conductor Dia.(mm)	主要尺寸 Dimensions (mm)				重量 Weight (Kg)
		a	h	b	L	
SLG-1CQ	35-50	40	65	6	65	0.38
SLG-2CQ	70-95	40	80	6	80	0.43
SLG-3CQ	120-150	50	85	8	125	0.69
SLG-4CQ	185-240	50	85	8	125	0.78

大截面导线设备线夹 (0° SL螺栓型)
Terminal Clamps (Type SL)




型号 Catalog NO.	适用导线外径 Conductor Dia. (mm)	主要尺寸 Dimensions (mm)				重量 Weight (Kg)
		h	a	b	Ø	
SL-630NA-125x125	34.82	125	125	20	35	5.7
SL-630NA-150x150	34.82	150	150	20	35	6.2
SL-1000NA-125x125	42.08	125	125	20	43	6.5
SL-1000NA-150x150	42.08	150	150	24	43	7.0
SL-10KA-3 (SL-600KA-125x125)	51.00	125	125	22	51	9.1
SL-10KA-4 (SL-600KA-150x150)	51.00	150	150	22	51	9.6
SL-9KA-3 (SL-900KA-125x125)	49.00	125	125	22	49	8.1
SL-9KA-4 (SL-900KA-150x150)	49.00	150	150	22	49	8.6
SL-10K-3 (SL-1400A-125x125)	51.00	125	125	22	51	7.5
SL-10K-4 (SL-1400A-150x150)	51.00	150	150	22	51	8.0
SL-10N-3 (SL-1440NA-125x125)	51.36	125	125	22	52	8.7
SL-10N-4 (SL-1440NA-150x150)	51.36	150	150	22	52	9.2

大截面导线设备线夹 (45° SL螺栓型)
Terminal Clamps For Single-Conductor (Type SL)




型号 Catalog NO.	适用导线外径 Conductor Dia. (mm)	主要尺寸 Dimensions (mm)				重量 Weight (Kg)
		h	a	b	Ø	
SL-630NB-125x125	34.82	125	125	20	35	5.7
SL-630NB-150x150	34.82	150	150	20	35	6.2
SL-1000NB-125x125	42.08	125	125	20	43	6.5
SL-1000NB-150x150	42.08	150	150	24	43	7.0
SL-10KC-3 (SL-600KB-125x125)	51.00	125	125	26	51	9.1
SL-10KC-4 (SL-600KB-150x150)	51.00	150	150	26	51	9.6
SL-9KC-3 (SL-900KB-125x125)	49.00	125	125	26	49	8.1
SL-9KC-4 (SL-900KB-150x150)	49.00	150	150	26	49	8.6
SL-10KC-3 (SL-1400B-125x125)	51.00	125	125	26	51	7.5
SL-10KC-4 (SL-1400B-150x150)	51.00	150	150	26	51	8.0
SL-10N-3 (SL-1440NB-125x125)	51.36	125	125	26	52	8.7
SL-10N-4 (SL-1440NB-150x150)	51.36	150	150	26	52	9.2

双导线设备线夹 (0° SSL螺栓型)
Terminal Clamps For Double-Bundle Conductor (Type SSL)

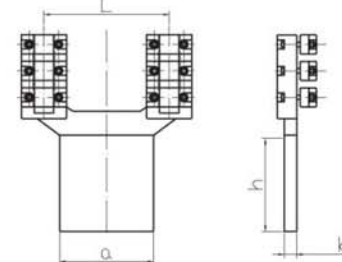

型号 Catalog NO.	适用导线外径 Conductor Dia. (mm)	主要尺寸 Dimensions (mm)				重量 Weight (Kg)
		h	a	b	L	
SSL-630NA/200-150x150	34.82	150	150	20	200	10.5
SSL-1000NA/200-150x150	42.08	150	150	24	200	11.0
SL-2x10KA/200-4 (SSL-600KA/200-150x150)	51.00	150	150	22	200	17.3
SL-2x9KA/200-4 (SSL-900KA/200-150x150)	49.00	150	150	22	200	15.4
SL-2x10A/200-4 (SSL-1400A/200-150x150)	51.00	150	150	22	200	14.0
SL-2x10NA/200-4 (SSL-1440A/200-150x150)	51.36	150	150	22	200	14.0
SSL-630NA/400-150x150	34.82	150	150	20	400	11.4
SSL-1000NA/400-150x150	42.08	150	150	24	400	12.9
SL-2x10KA/400-4 (SSL-600KA/400-150x150)	51.00	150	150	22	400	18.2
SL-2x9KA/400-4 (SSL-900KA/400-150x150)	49.00	150	150	22	400	17.1
SL-2x10A/400-4 (SSL-1400A/400-150x150)	51.00	150	150	22	400	14.9
SL-2x10NA/400-4 (SSL-1440A/400-150x150)	51.36	150	150	22	400	14.9



导线设备线夹 (45° SSL螺栓型)
Terminal Clamps For Double-Bundle Conductor (Type SSL)

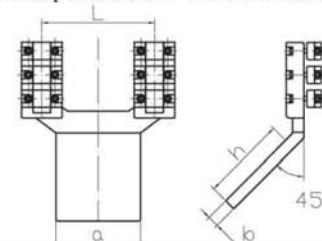

型号 Catalog NO.	适用导线外径 Conductor Dia. (mm)	主要尺寸 Dimensions (mm)				重量 Weight (Kg)
		h	a	b	L	
SSL-630NB/200-150x150	34.82	150	150	20	200	10.5
SSL-1000NB/200-150x150	42.08	150	150	24	200	11.0
SL-2x10KC/200-4 (SSL-600KB/200-150x150)	51.00	150	150	26	200	17.3
SL-2x9KC/200-4 (SSL-900KB/200-150x150)	49.00	150	150	26	200	15.4
SL-2x10C/200-4 (SSL-1400B/200-150x150)	51.00	150	150	26	200	14.0
SL-2x10NC/200-4 (SSL-1440B/200-150x150)	51.36	150	150	26	200	14.0
SSL-630NB/400-150x150	34.82	150	150	20	400	11.4
SSL-1000NB/400-150x150	42.08	150	150	24	400	12.9
SL-2x10KC/400-4 (SSL-600KB/400-150x150)	51.00	150	150	26	400	18.2
SL-2x9KC/400-4 (SSL-900KB/400-150x150)	49.00	150	150	26	400	17.1
SL-2x10C/400-4 (SSL-1400B/400-150x150)	51.00	150	150	26	400	14.9
SL-2x10NC/400-4 (SSL-1440B/400-150x150)	51.36	150	150	26	400	14.9

双导线设备线夹 (90° SSL螺栓型)


Terminal Clamps For Double-Bundle Conductor (Type SSL)

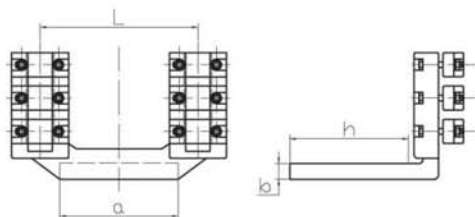

型号 Catalog NO.	适用导线外径 Conductor Dia. (mm)	主要尺寸 Dimensions (mm)				重量 Weight (Kg)
		h	a	b	L	
SSL-630NC/200-150x150	34.82	150	150	20	200	10.5
SSL-1000NC/200-150x150	42.08	150	150	24	200	11.0
SL-2x10KD/200-4 (SSL-600KC/200-150x150)	51.00	150	150	30	200	17.3
SL-2x9KD/200-4 (SSL-900KC/200-150x150)	49.00	150	150	30	200	15.4
SL-2x10D/200-4 (SSL-1400C/200-150x150)	51.00	150	150	30	200	14.0
SL-2x10ND/200-4 (SSL-1440C/200-150x150)	51.36	150	150	30	200	14.0
SSL-630NC/400-150x150	34.82	150	150	20	400	11.4
SSL-1000NC/400-150x150	42.08	150	150	24	400	12.9
SL-2x10KD/400-4 (SSL-600KC/400-150x150)	51.00	150	150	30	400	18.2
SL-2x9KD/400-4 (SSL-900KC/400-150x150)	49.00	150	150	30	400	17.1
SL-2x10D/400-4 (SSL-1400C/400-150x150)	51.00	150	150	30	400	14.9
SL-2x10ND/400-4 (SSL-1440C/400-150x150)	51.36	150	150	30	400	14.9

铜铝双导线设备线夹 (0° 覆铜搪锡 SSLG-AQ螺栓型)


Aluminium-Copper Terminal Clamps For Double-Bundle Conductor (Type SSLG-AQ)

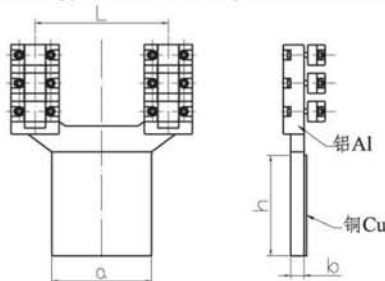

型号 Catalog NO.	适用导线外径 Conductor Dia. (mm)	主要尺寸 Dimensions (mm)				重量 Weight (Kg)
		h	a	b	L	
SSLG-630NAQ/200-150x150	34.82	150	150	20	200	10.9
SSLG-1000NAQ/200-150x150	42.08	150	150	24	200	11.4
SLG-2x10KAQ/200-4 (SSLG-600KAQ/200-150x150)	51.00	150	150	22	200	15.6
SLG-2x9KAQ/200-4 (SSLG-900KAQ/200-150x150)	49.00	150	150	22	200	16.5
SLG-2x10AQ/200-4 (SSLG-1400AQ/200-150x150)	51.00	150	150	22	200	14.4
SLG-2x10NAQ/200-4 (SSLG-1440AQ/200-150x150)	51.36	150	150	22	200	14.4
SSLG-630NAQ/400-150x150	34.82	150	150	20	400	11.8
SSLG-1000NAQ/400-150x150	42.08	150	150	24	400	13.3
SLG-2x10KAQ/400-4 (SSLG-600KAQ/400-150x150)	51.00	150	150	22	400	16.2
SLG-2x9KAQ/400-4 (SSLG-900KAQ/400-150x150)	49.00	150	150	22	400	17.0
SLG-2x10AQ/400-4 (SSLG-1400AQ/400-150x150)	51.00	150	150	22	400	15.3
SLG-2x10NAQ/400-4 (SSLG-1440AQ/400-150x150)	51.36	150	150	22	400	15.3

双导线设备线夹 (0° SLS 螺栓型)



Terminal Clamps For Double-Bundle Conductor (Type SLS)

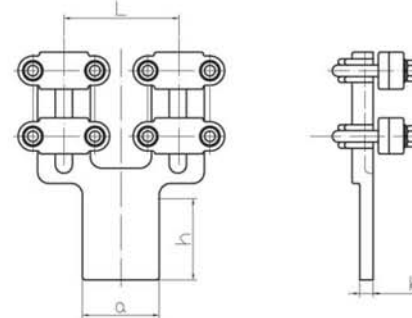

型号 Catalog NO.	适用导线 Suitable Conductor	主要尺寸 Dimensions (mm)				重量 Weight (Kg)
		a	h	b	L	
SLS-4A-120	LGJ-185-240	80	85	14	120	4.5
SLS-5A-120	LGJ-300-400	100	105	16	120	5.0
SLS-6A-120	LGJ-500-630	125	130	20	120	5.8
SLS-4A-200	LGJ-185-240	80	85	14	200	4.7
SLS-5A-200	LGJ-300-400	100	105	16	200	5.2
SLS-6A-200	LGJ-500-630	125	130	20	200	6.0
SLS-7A-200	LGJ-800	125	130	22	200	7.4

双导线设备线夹 (30° SLS 螺栓型)


Terminal Clamps For Double-Bundle Conductor (Type SLS)

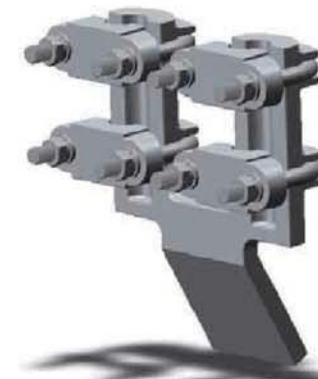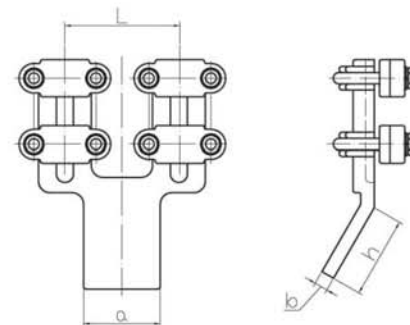

型号 Catalog NO.	适用导线 Suitable Conductor	主要尺寸 Dimensions (mm)				重量 Weight (Kg)
		a	h	b	L	
SLS-4B-120	LGJ-185-240	80	85	14	120	4.5
SLS-5B-120	LGJ-300-400	100	105	16	120	5.0
SLS-6B-120	LGJ-500-630	125	130	20	120	5.8
SLS-4B-200	LGJ-185-240	80	85	14	200	4.7
SLS-5B-200	LGJ-300-400	100	105	16	200	5.2
SLS-6B-200	LGJ-500-630	125	130	20	200	6.0
SLS-7B-200	LGJ-800	125	130	22	200	7.4

双导线设备线夹 (90° SLS 螺栓型)


Terminal Clamps For Double-Bundle Conductor (Type SLS)

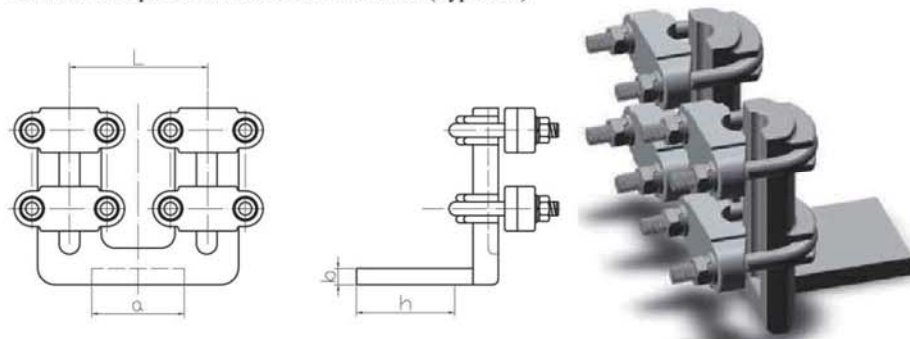

型号 Catalog NO.	适用导线 Suitable Conductor	主要尺寸 Dimensions (mm)				重量 Weight (Kg)
		a	h	b	L	
SLS-4C-120	LGJ-185-240	80	85	14	120	4.5
SLS-5C-120	LGJ-300-400	100	105	16	120	5.0
SLS-6C-120	LGJ-500-630	125	130	20	120	5.8
SLS-4C-200	LGJ-185-240	80	85	14	200	4.7
SLS-5C-200	LGJ-300-400	100	105	16	200	5.2
SLS-6C-200	LGJ-500-630	125	130	20	200	6.0
SLS-7C-200	LGJ-800	125	130	22	200	7.4

铜铝过渡双导线设备线夹 (0° 覆铜搪锡 SLSG 螺栓型)


Aluminium-Copper Terminal Clamps For Double-Bundle Conductor (Type SLSG)

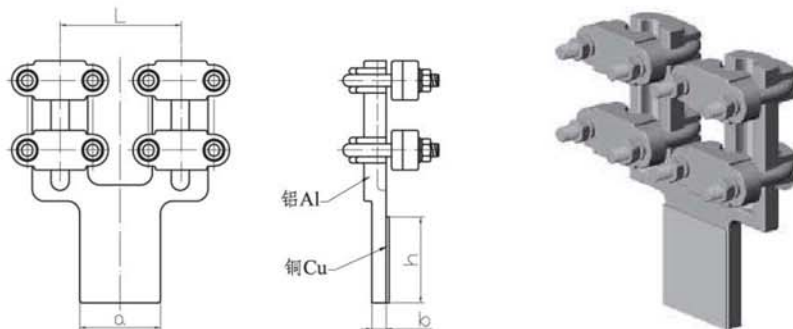

型号 Catalog NO.	适用导线 Suitable Conductor	主要尺寸 Dimensions (mm)				重量 Weight (Kg)
		a	h	b	L	
SLSG-4AQ-120	LGJ-185-240	80	80	14	120	4.7
SLSG-5AQ-120	LGJ-300-400	100	100	16	120	5.7
SLSG-6AQ-120	LGJ-500-630	125	125	20	120	6.5
SLSG-4AQ-200	LGJ-185-240	80	80	14	200	4.9
SLSG-5AQ-200	LGJ-300-400	100	100	16	200	5.4
SLSG-6AQ-200	LGJ-500-630	125	125	20	200	6.8
SLSG-7AQ-200	LGJ-800	125	125	22	200	7.7

铜铝过渡双导线设备线夹 (30° 覆铜搪锡 SLSG 螺栓型)


Aluminium-Copper Terminal Clamps For Double-Bundle Conductor (Type SLSG)

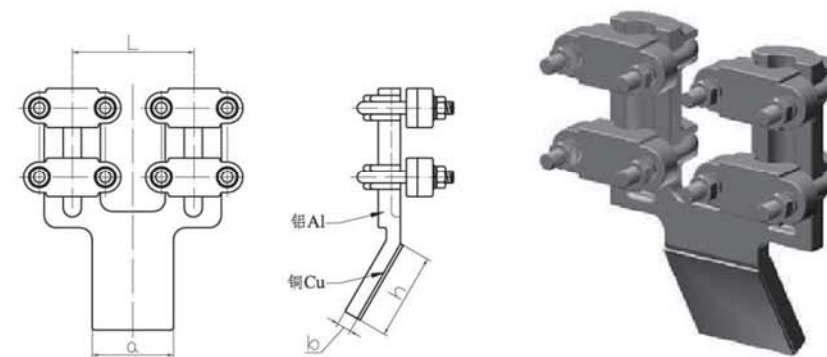

型号 Catalog NO.	适用导线 Suitable Conductor	主要尺寸 Dimensions (mm)				重量 Weight (Kg)
		a	h	b	L	
SLSG-4BQ-120	LGJ-185-240	80	80	14	120	4.7
SLSG-5BQ-120	LGJ-300-400	100	100	16	120	5.7
SLSG-6BQ-120	LGJ-500-630	125	125	20	120	6.5
SLSG-4BQ-200	LGJ-185-240	80	80	14	200	4.9
SLSG-5BQ-200	LGJ-300-400	100	100	16	200	5.4
SLSG-6BQ-200	LGJ-500-630	125	125	20	200	6.8
SLSG-7BQ-200	LGJ-800	125	125	22	200	7.7

铜铝过渡双导线设备线夹 (90° 覆铜搪锡 SLSG 螺栓型)


Aluminium-Copper Terminal Clamps For Double-Bundle Conductor (Type SLSG)

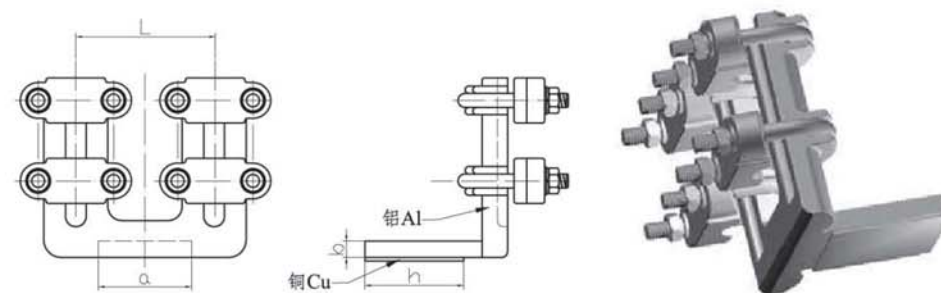

型号 Catalog NO.	适用导线 Suitable Conductor	主要尺寸 Dimensions (mm)				重量 Weight (Kg)
		a	h	b	L	
SLSG-4CQ-120	LGJ-185-240	80	80	14	120	4.7
SLSG-5CQ-120	LGJ-300-400	100	100	16	120	5.7
SLSG-6CQ-120	LGJ-500-630	125	125	20	120	6.5
SLSG-4CQ-200	LGJ-185-240	80	80	14	200	4.9
SLSG-5CQ-200	LGJ-300-400	100	100	16	200	5.4
SLSG-6CQ-200	LGJ-500-630	125	125	20	200	6.8
SLSG-7CQ-200	LGJ-800	125	125	22	200	7.7

大截面双导线设备线夹 (SL 螺栓型)


Terminal Connectors for Twin-Bundle Large Cross-sectional Conductor (Type SL, Bolted Type)

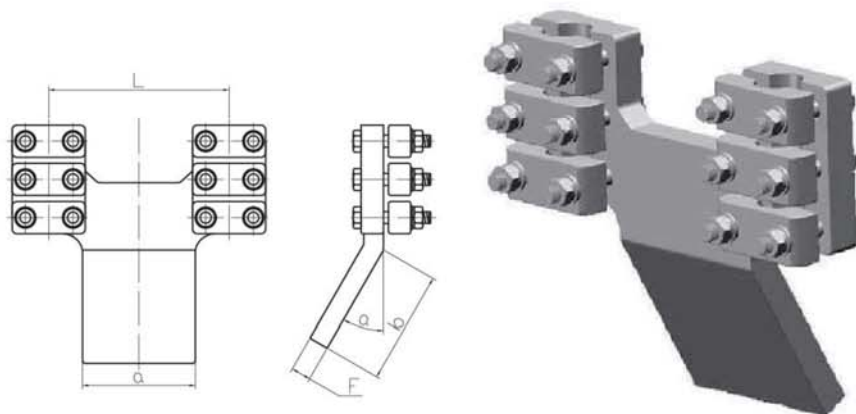

型号 Catalog NO.	适用导线 Suitable Conductor	主要尺寸 Dimensions (mm)					重量 Weight (Kg)	备注 Remarks
		a	b	F	L	α		
SL-2x10KA/200-3 (SL-600KA-24)	LGKK-600	125	125	22	200	0°	16.9	带芯棒 with core rod
SL-2x10KB/200-3 (SL-600KB-24)				22		30°		
SL-2x10KC/200-3 (SL-600KB1-24)				26		45°		
SL-2x10KD/200-3 (SL-600KC-24)				30		90°		
SL-2x10KA/400-4 (SL-600KA-44)	LGKK-600	150	150	22	400	0°	17.7	带芯棒 with core rod
SL-2x10KB/400-4 (SL-600KB-44)				22		30°		
SL-2x10KC/400-4 (SL-600KB1-44)				26		45°		
SL-2x10KD/400-4 (SL-600KC-44)				30		90°		
SL-2x9KA/200-3 (SL-900KA-24)	LGKK-900	125	125	22	200	0°	15.0	带芯棒 with core rod
SL-2x9KB/200-3 (SL-900KB-24)				22		30°		
SL-2x9KC/200-3 (SL-900KB1-24)				26		45°		
SL-2x9KD/200-3 (SL-900KC-24)				30		90°		
SL-2x10A/200-3 (SL-1400A-24)	LGJQT-1400	125	125	22	200	0°	13.6	
SL-2x10B/200-3 (SL-1400B-24)				22		30°		
SL-2x10C/200-3 (SL-1400B1-24)				26		45°		
SL-2x10D/200-3 (SL-1400C-24)				30		90°		
SL-2x10A/400-4 (SL-1400A-44)	LGJQT-1400	150	150	22	400	0°	14.5	
SL-2x10B/400-4 (SL-1400B-44)				22		30°		
SL-2x10C/400-4 (SL-1400B1-44)				26		45°		
SL-2x10D/400-4 (SL-1400C-44)				30		90°		

大截面双导线铜铝过渡设备线夹 (SLG 螺栓型, 铜铝复合片)


Al-Cu Transition Connectors for Twin-Bundle Large Cross-sectional Conductor (Type SLG-AQ/BQ, Bolted Type, With Al-Cu bimetal sheet)

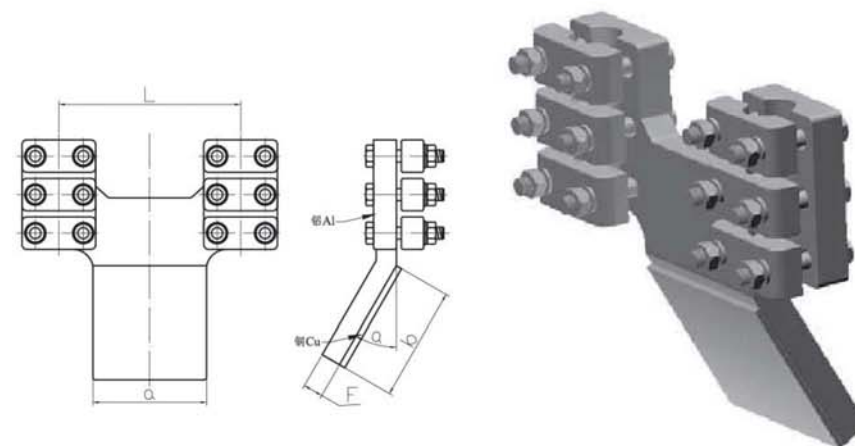

型号 Catalog NO.	适用导线 Suitable Conductor	主要尺寸 Dimensions (mm)					重量 Weight (Kg)	备注 Remarks
		a	b	F	L	α		
SLG-2x10KAQ/200-3 (SLG-600KAQ-24)	LGKK-600	125	125	22	200	0°	17.8	带芯棒 with core rod
SLG-2x10KBQ/200-3 (SLG-600KBQ-24)				22		30°		
SLG-2x10KCQ/200-3 (SLG-600KB1Q-24)				26		45°		
SLG-2x10KDCQ/200-3 (SLG-600KCQ-24)				30		90°		
SLG-2x10KAQ/400-4 (SLG-600KAQ-44)	LGKK-600	150	150	22	400	0°	18.7	带芯棒 with core rod
SLG-2x10KBQ/400-4 (SLG-600KBQ-44)				22		30°		
SLG-2x10KCQ/400-4 (SLG-600KB1Q-44)				26		45°		
SLG-2x10KDCQ/400-4 (SLG-600KCQ-44)				30		90°		
SLG-2x9KAQ/200-3 (SLG-900KAQ-24)	LGKK-900	125	125	22	200	0°	16.0	带芯棒 with core rod
SLG-2x9KBQ/200-3 (SLG-900KBQ-24)				22		30°		
SLG-2x9KCQ/200-3 (SLG-900KB1Q-24)				26		45°		
SLG-2x9KDCQ/200-3 (SLG-900KCQ-24)				30		90°		
SLG-2x10AQ/200-3 (SLG-1400AQ-24)	LGJQT-1400	125	125	22	200	0°	14.6	
SLG-2x10BQ/200-3 (SLG-1400BQ-24)				22		30°		
SLG-2x10CQ/200-3 (SLG-1400B1Q-24)				26		45°		
SLG-2x10DCQ/200-3 (SLG-1400CQ-24)				30		90°		
SLG-2x10AQ/400-4 (SLG-1400AQ-44)	LGJQT-1400	150	150	22	400	0°	15.4	
SLG-2x10BQ/400-4 (SLG-1400BQ-44)				22		30°		
SLG-2x10CQ/400-4 (SLG-1400B1Q-44)				26		45°		
SLG-2x10DCQ/400-4 (SLG-1400CQ-44)				30		90°		

双导线设备线夹 (SSY 压缩型)

Terminal Connectors for twin-Bundle Conductors (Type SSY, Compression Type)

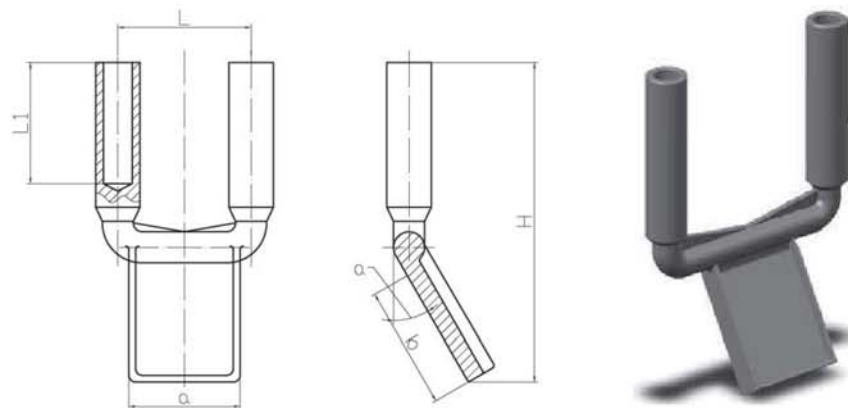


型号 Catalog NO.	适用导线 Suitable Conductor	主要尺寸 Dimensions (mm)						重量 Weight (Kg)
		L1	α	a	b	H	L	
SSY-300/120A	LGJ-300	110	0°	100	110	296	120	1.7
SSY-300/120B	LGJ-300	110	30°	100	110	288	120	1.8
SSY-300/200A	LGJ-300	160	0°	100	120	293	200	1.6
SSY-300/200B1	LGJ-300	160	45°	100	100	258	200	1.6
SSY-300/200C	LGJ-300	160	90°	100	120	185	200	1.6
SSY-400/120A-1	LGJ-400	120	0°	120	130	325	120	1.4
SSY-400/200A	LGJ-400	160	0°	120	130	315	200	2.6
SSY-400/200B1	LGJ-400	160	45°	120	130	275	200	2.1
SSY-400/200C	LGJ-400	160	90°	120	135	195	200	2.1
SSY-500/35	LGJ-500/35	160	0°	110	110	356	400	2.3
SSY-500/45	LGJ-500/45	160	0°	110	110	356	400	2.3
SSY-500/55	LGJ-500/55	160	0°	110	110	356	400	2.3
SSY-630/45	LGJ-630/45	160	0°	115	115	376	400	3.0
SSY-630/55	LGJ-630/55	160	0°	115	115	376	400	3.0
SSY-630/80	LGJ-630/80	160	0°	115	115	376	400	3.0
SSY-800/55	LGJ-800/55	160	0°	125	125	401	400	3.4
SSY-800/70	LGJ-800/70	160	0°	125	125	401	400	3.4
SSY-800/100	LGJ-800/100	160	0°	125	125	401	400	3.4
SSY-1144N/400-100	NAHLGJQ-1144	150	0°	100	170	329	400	4.5
SSY-1144N/400-134	NAHLGJQ-1144	150	0°	134	125	284	400	4.5

五、母线金具 BUS-BAR FITTING

软母线固定金具 (MDG型单母线用)


Single Flexible Bus-bar Supports (Type MDG)

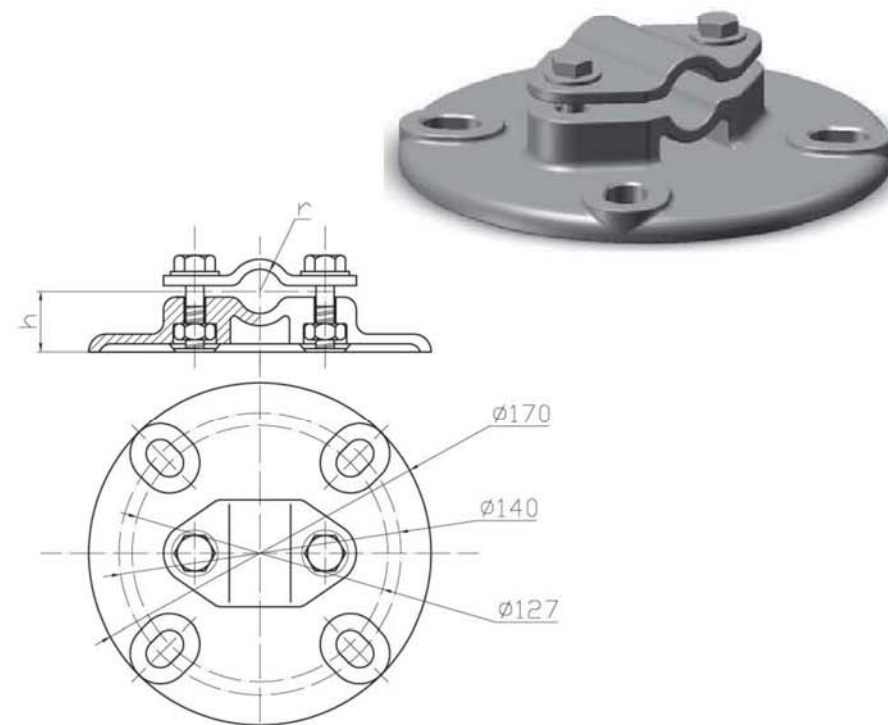

型号 Catalog NO.	适用导线直径 Suitable Bus-bar (mm)	主要尺寸 Dimensions (mm)		重量 Weight (Kg)
		r	h	
MDG-4	19.02-21.28	11	30	0.7
MDG-5	23.70-27.36	14	33	0.7
MDG-6	30.16-33.20	17	36	0.7

单导线固定金具 (MDG型)


Supports for Single Conductor (Type MDG)

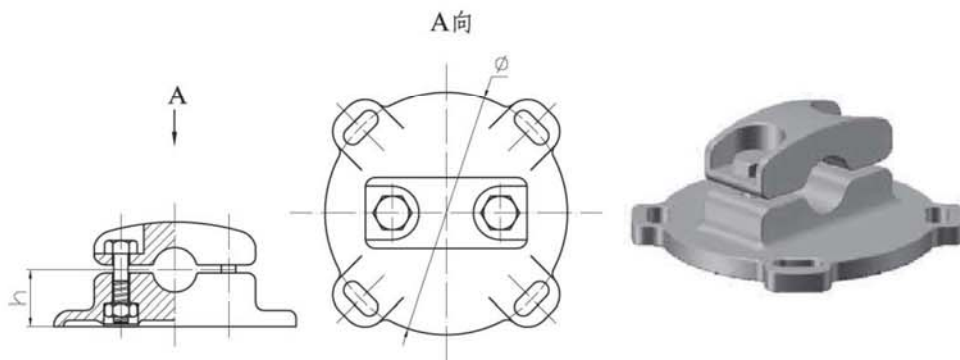

型号 Catalog NO.	适用导线 Suitable Conductor	主要尺寸 Dimensions (mm)		重量 Weight (Kg)
		Ø	h	
MDG-400N-127	NAHLGJQ-400	127	38	1.6
MDG-600K-127	LGKK-600	127	52	4.5
MDG-600K-140	LGKK-600	140	42.5	4.6
MDG-600K-190	LGKK-600	190	58	4.7
MDG-600K-225	LGKK-600	225	38	4.7
MDG-600K-250	LGKK-600	250	58	5.2
MDG-1400-127	LGJQT-1400	127	52	4.5
MDG-1400-140	LGJQT-1400	140	42.5	4.6
MDG-1400-190	LGJQT-1400	190	58	4.7
MDG-1400-225	LGJQT-1400	225	58	4.7
MDG-1400-250	LGJQT-1400	250	58	4.8
MDG-900K-190	LGKK-900	190	58.5	2.1
MDG-1440N-127	NAHLGJQ-1440	127	52	4.5
MDG-1440N-140	NAHLGJQ-1440	140	42.5	4.6
MDG-1440N-190	NAHLGJQ-1440	190	58	4.7
MDG-1440N-225	NAHLGJQ-1440	225	58	4.7
MDG-1440N-250	NAHLGJQ-1440	250	58	5.2
MDG-500N-254	NAHLGJQ-500	254	68	3.5
MDG-1000N-254	NAHLGJQ-1000	254	68	4.2
MDG-1440N-254	NAHLGJQ-1440	254	68	5.2

软母线固定金具 (MDG型双母线用)


Supports for twin bundle Conductor (Type MSG)

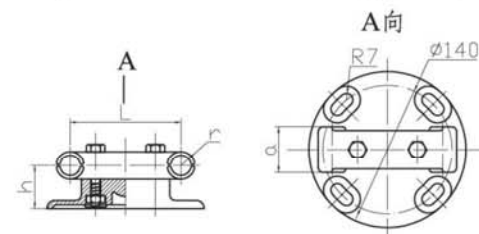

型号 Catalog NO.	适用导线直径 Suitable Bus-bar (mm)	主要尺寸 Dimensions (mm)				重量 Weight (Kg)
		a	r	h	L	
MSG-4/120	18.1-22.0	50	11	47	120	1.3
MSG-5/120	23.0-29.0	60	14	50	120	1.2
MSG-6/120	29.1-35.0	70	17	53	120	1.1
MSG-4/200	18.1-22.0	50	11	47	200	1.5
MSG-5/200	23.0-29.0	60	14	50	200	1.6
MSG-6/200	29.1-35.0	70	17	53	200	1.8
MSG-4/400	18.1-22.0	50	11	47	400	2.8
MSG-5/400	23.0-29.0	60	14	50	400	3.1
MSG-6/400	29.1-35.0	70	17	53	400	3.4
MSG-9/400	45.0-49.0	60	24	--	400	
MSG-10/400	50.0-55.0	70	27	--	400	


软母线固定金具 (MDG型双母线用)

Supports for twin bundle Conductor (Type MSG)

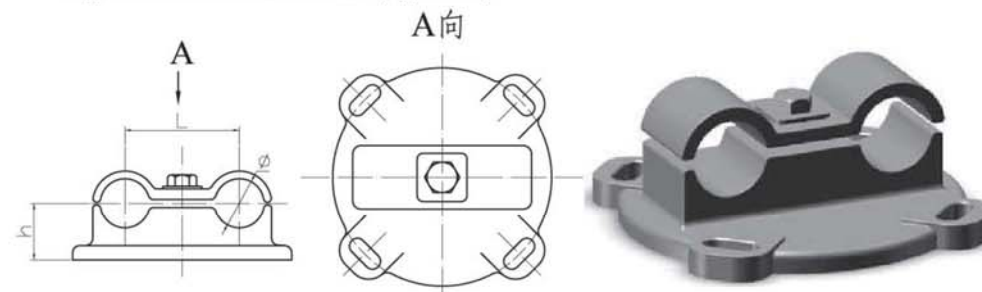


型号 Catalog NO.	适用导线 Suitable Conductor	主要尺寸 Dimensions (mm)			重量 Weight (Kg)
		Ø	h	L	
MSG-900K-120/225	LGKK-900	52	60	120	2.46

管形母线固定金具 (MGG型)
Tubular Bus-bar Supports (Type MGG)

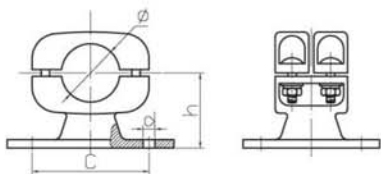


型号 Catalog NO.	适用母线 Suitable Bus-bar (mm)	主要尺寸 Dimensions (mm)				重量 Weight (Kg)
		Ø	C	d	h	
MGG-70	70/64	70	140	14	90	2.8
MGG-80	80/72	80	140	14	98	4.0
MGG-90	90/80	90	140	14	102	4.3
MGG-100	100/90	100	140	14	114	4.5
MGG-110	110/100	110	140	14	--	
MGG-120	120/110	120	140	14	122	5.3
MGG-130	130/116	130	140	14	135	7.3
MGG-150	150/136	150	225	18	150	8.4
MGG-170	170/156	170	225	18	170	9.5
MGG-200	200/180	200	225	18	190	13.5
MGG-250	250/230	250	254	18	215	19.5

管形母线固定金具 (MGG1滑动型)
Tubular Bus-bar Supports (Type MGG1)

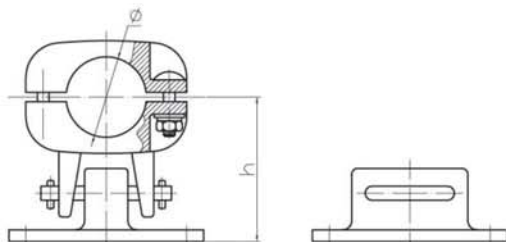


型号 Catalog NO.	适用母线 Suitable Bus-bar (mm)	主要尺寸 Dimensions (mm)		重量 Weight (Kg)
		Ø	h	
MGG1-70	70/64	70	125	4.5
MGG1-80	80/72	80	130	5.0
MGG1-90	90/80	90	130	5.4
MGG1-100	100/90	100	135	6.0
MGG1-120	120/110	120	145	6.5
MGG1-130	130/116	130	155	7.0
MGG1-150	150/136	150	160	7.7
MGG1-170	170/156	170	180	9.5
MGG1-200	200/180	200	210	11.2
MGG1-250	250/230	250	248	12.9

管形母线固定金具 (MGG2摆动型)
Tubular Bus-bar Supports (Type MGG2)

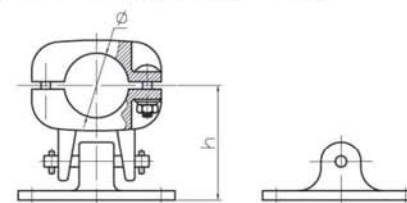


型号 Catalog NO.	适用母线 Suitable Bus-bar (mm)	主要尺寸 Dimensions (mm)		重量 Weight (Kg)
		Ø	h	
MGG2-70	70/64	70	125	4.5
MGG2-80	80/72	80	130	5.0
MGG2-90	90/80	90	130	5.4
MGG2-100	100/90	100	135	6.0
MGG2-120	120/110	120	145	6.5
MGG2-130	130/116	130	155	7.0
MGG2-150	150/136	150	160	7.7
MGG2-170	170/156	170	180	9.5
MGG2-200	200/180	200	210	11.2
MGG2-250	250/230	250	248	12.9

管形母线终端固定金具 (MGD型)
Tubular Bus-bar End Supports (Type MGD)

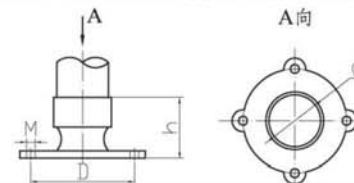

型号 Catalog NO.	适用母线 Suitable Bus-bar (mm)	主要尺寸 Dimensions (mm)				重量 Weight (Kg)
		D	M	h	Ø	
MGD-70 x 140	70/64	140	12	82	70	1.1
MGD-80 x 140	80/72	140	12	82	80	1.2
MGD-100 x 140	100/90	140	12	108	100	1.7
MGD-70 x 190	70/64	190	12	85	70	1.8
MGD-80 x 190	80/72	190	12	85	80	1.9
MGD-100 x 190	100/90	190	12	88	100	2.2
MGD-70 x 225	70/64	225	16	86	70	2.9
MGD-80 x 225	80/72	225	16	86	80	3.1
MGD-100 x 225	100/90	225	16	96	100	3.3
MGD-110 x 225	110/100	225	16	105	110	3.5
MGD-120 x 225	120/110	225	16	120	120	3.8
MGD-130 x 225	130/116	225	16	120	130	3.9
MGD-150 x 225	150/136	225	16	130	150	4.3

管母线（双支点）固定金具 (MGGB型)
Supports for Tubular Bus-bar (Type MGGB)

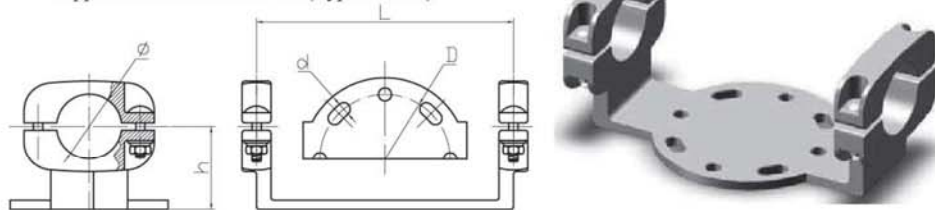


型号 Catalog NO.	适用母线 Suitable Bus-bar (mm)	主要尺寸 Dimensions (mm)					重量 Weight (Kg)
		L	h	d	D	Ø	
MGG-70S (MGGB-70)	70	276	90	14	140	70	4.5
MGG-80S (MGGB-80)	80	276	98	14	140	80	4.8
MGG-170S (MGGB-170)	170	400	170	22	170	190	12.0
MGG-200S (MGGB-200)	200	360	190	22	225	200	--
MGG-250S (MGGB-250)	250	360	190	22	225	250	--

悬吊式管母线固定金具 (MGX型直吊式)
Suspension Supports for Tubular Bus-bar (Type MGX, Vertical Type)




型号 Catalog NO.	适用母线 Suitable Bus-bar (mm)	主要尺寸 Dimensions (mm)				重量 Weight (Kg)
		C	M	h	Ø	
MGU-70 (MGX-70)	70	18	16	290	70	3.0
MGU-80 (MGX-80)	80	18	16	300	80	6.0
MGU-90 (MGX-90)	90	18	16	310	90	6.5
MGU-100 (MGX-100)	100	20	16	340	100	7.5
MGU-120 (MGX-120)	120	20	18	380	120	10.5
MGU-130 (MGX-130)	130	20	18	400	130	13.5
MGU-150 (MGX-150)	150	20	20	410	150	16.5
MGU-170 (MGX-170)	170	22	20	440	170	20
MGU-200 (MGX-200)	200	24	22	450	200	22.5
MGU-250 (MGX-250)	250	26	24	470	250	24.8

悬吊式管母线固定金具 (MGXX1型斜吊式)
Suspension Supports for Tubular Bus-bar (Type MGXX1, Oblique Type)

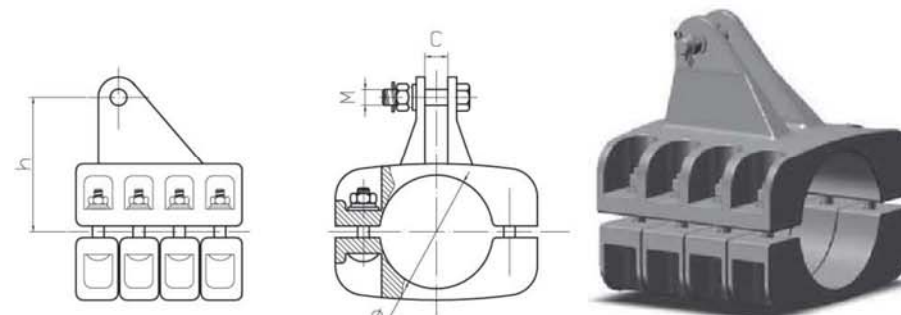

型号 Catalog NO.	适用母线 Suitable Bus-bar (mm)	主要尺寸 Dimensions (mm)				重量 Weight (Kg)
		C	h	Ø	M	
MGXX1-130	130/116	26	155	130	18	12
MGXX1-150	150/136	26	165	150	18	16.5
MGXX1-170	170/156	26	172	170	20	18
MGXX1-200	200/180	30	185	225	24	22
MGXX1-250	250/230	30	216	250	24	29



悬吊式管母线固定金具 (MGXX2型直吊式)
Suspension Supports for Tubular Bus-bar (Type MGXX2, Vertical Type)

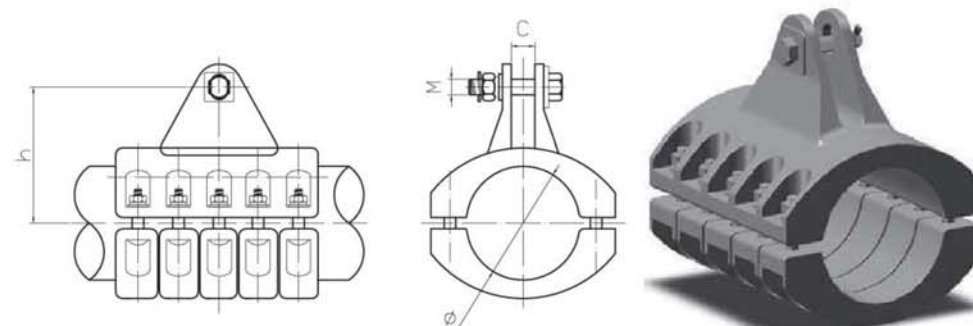

型号 Catalog NO.	适用母线 Suitable Bus-bar (mm)	主要尺寸 Dimensions (mm)				重量 Weight (Kg)
		h	Ø	C	M	
MGXX1-130	130/116	155	130	27	18	12
MGXX1-150	150/136	165	150	29	18	16.5
MGXX1-170	170/156	172	170	26	20	18
MGXX1-200	200/180	185	225	30	24	22
MGXX1-250	250/230	216	250	30	24	29

管母线T型线夹 (MGT型)


T-Connectors for Tubular Bus-bar (Type MGT)



型号 Catalog NO.	适用管母线 Suitable Bus-bar (mm)	主要尺寸 Dimensions (mm)				重量 Weight (Kg)
		Ø	L	C	S	
MGT-50	50/44	50	85	80	14	2.0
MGT-70	70/64	70	85	80	16	2.4
MGT-80	80/72	80	85	80	16	4.0
MGT-90	90/80	90	105	100	18	4.2
MGT-100	100/90	100	105	100	18	4.4
MGT-110	110/100	110	105	100	18	5.0
MGT-120	120/110	120	105	100	18	5.2
MGT-130	130/116	130	130	125	20	7.2
MGT-150	150/136	150	130	125	20	8.2
MGT-170	170/156	170	160	150	22	11.5
MGT-200	200/180	200	170	160	22	15
MGT-250	250/230	250	180	170	24	19.5
MGT-150.1	150/136	150	160	150	30	12.3

管母线T型线夹 (MGT(D)型)


T-Connectors for Tubular Bus-bar (Type MGT/D)



型号 Catalog NO.	适用管母线 Suitable Bus-bar (mm)	主要尺寸 Dimensions (mm)				重量 Weight (Kg)
		Ø	L	C	S	
MGT-70D	70/64	70	100	80	16	2.4
MGT-80D	80/72	80	100	80	16	4.0
MGT-90D	90/80	90	125	100	18	4.2
MGT-100D	100/90	100	125	100	18	3.6
MGT-110D	110/100	110	125	100	18	4.0
MGT-120D	120/110	120	125	100	18	4.3
MGT-130D	130/116	130	150	125	20	5.6
MGT-150D	150/136	150	150	125	20	7.0
MGT-170D	170/156	170	180	150	22	9.5
MGT-200D	200/180	200	200	160	22	15
MGT-250D	250/230	250	200	170	24	21

管母线T型线夹 (MGTL型)


T-Connectors for Tubular Bus-bar (Type MGTL)

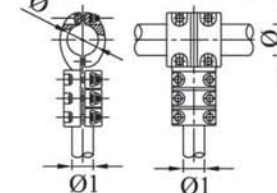

型号 Catalog NO.	适用母线 Suitable Bus-bar (mm)	引下线型号 Conductor	主要尺寸 Dimensions (mm)		重量 Weight (Kg)
			Ø	Ø1	
MGTL-70	70/64	导线型号 用户自选 As users' choice	70	根据所选 引下线型 号确定 According to conductor	
MGTL-80	80/72		80		
MGTL-90	90/80		90		
MGTL-100	100/90		100		
MGTL-110	110/100		110		
MGTL-120	120/110		120		
MGTL-130	130/116		130		
MGTL-150	150/136		150		
MGTL-170	170/156		170		
MGTL-200	200/180		200		
MGTL-250	250/230		250		

管母线T型线夹 (MGTY型)


T-Connectors for Tubular Bus-bar (Type MGTY)

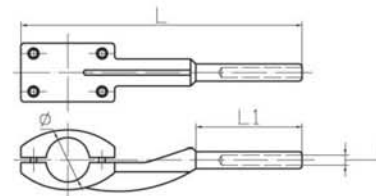

型号 Catalog NO.	适用母线 Suitable Bus-bar (mm)	引下线型号 Conductor	主要尺寸 Dimensions (mm)			重量 Weight (Kg)
			Ø	d	L	
MGTY-70	70/64	导线型号 用户自选 As users' choice	70	根据所选 引下线型 号确定 According to conductor	80	16
MGTY-80	80/72		80		80	16
MGTY-90	90/80		90		100	18
MGTY-100	100/90		100		100	18
MGTY-110	110/100		110		100	18
MGTY-120	120/110		120		100	18
MGTY-130	130/116		130		125	20
MGTY-150	150/136		150		125	20
MGTY-170	170/156		170		150	22
MGTY-200	200/180		200		160	22
MGTY-250	250/230		250		170	24


管母双引下线T型线夹 (MG/MR型A类)

T-Connectors for Double Conductors (Type MG/MR, Group A)

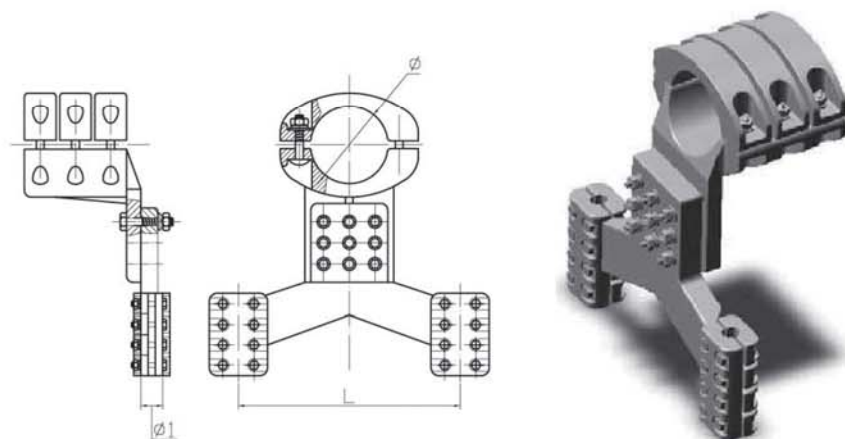

管母双引下线T型线夹 (MG/MR型B类)

T-Connectors for Double Conductors (Type MG/MR, Group B)

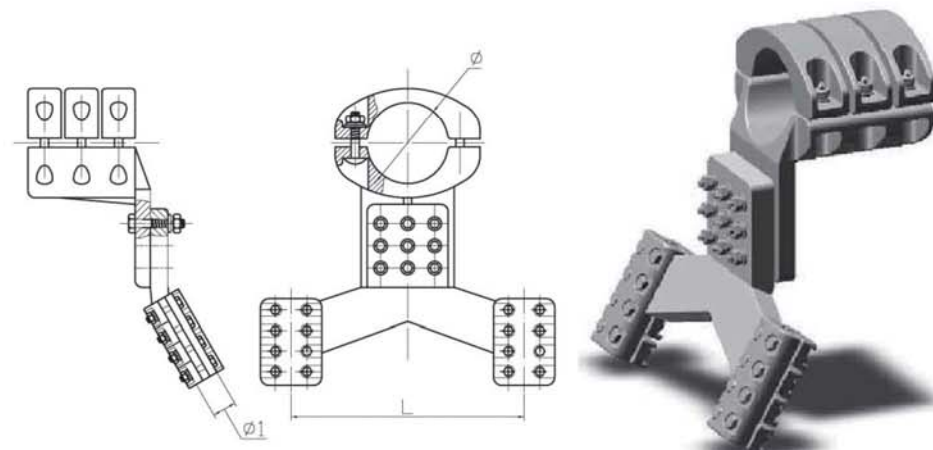


型号 Catalog NO.	适用母线 Suitable Bus-bar (mm)		主要尺寸 Dimensions (mm)		
	管母线规格	引下线规格	Ø	Ø1	L
MGD-70A(1/2)-200 (MG-70/MR()/200A)	70/64	导线型号 用户自选	70	根据所选 引下线型 号确定	200
MGD-80A(1/2)-200 (MG-80/MR()/200A)	80/72		80		200
MGD-90A(1/2)-200 (MG-90/MR()/200A)	90/80		90		200
MGD-100A(1/2)-200 (MG-100/MR()/200A)	100/90		100		200
MGD-110A(1/2)-200 (MG-110/MR()/200A)	110/100		110		200
MGD-120A(1/2)-200 (MG-120/MR()/200A)	120/110		120		200
MGD-130A(1/2)-200 (MG-130/MR()/200A)	130/116		130		200
MGD-150A(1/2)-200 (MG-150/MR()/200A)	150/136		150		200
MGD-170A(1/2)-200 (MG-170/MR()/200A)	170/156		170		200
MGD-200A(1/2)-200 (MG-200/MR()/200A)	200/180		200		200
MGD-250A(1/2)-200 (MG-250/MR()/200A)	250/230	As users' choice	250	According to conductor	200
MGD-70A(1/2)-400 (MG-70/MR()/400A)	70/64		70		400
MGD-80A(1/2)-400 (MG-80/MR()/400A)	80/72		80		400
MGD-90A(1/2)-400 (MG-90/MR()/400A)	90/80		90		400
MGD-100A(1/2)-400 (MG-100/MR()/400A)	100/90		100		400
MGD-110A(1/2)-400 (MG-110/MR()/400A)	110/100		110		400
MGD-120A(1/2)-400 (MG-120/MR()/400A)	120/110		120		400
MGD-130A(1/2)-400 (MG-130/MR()/400A)	130/116		130		400
MGD-150A(1/2)-400 (MG-150/MR()/400A)	150/136		150		400
MGD-170A(1/2)-400 (MG-170/MR()/400A)	170/156		170		400
MGD-200A(1/2)-400 (MG-200/MR()/400A)	200/180		200		400
MGD-250A(1/2)-400 (MG-250/MR()/400A)	250/230		250		400

型号 Catalog NO.	适用母线 Suitable Bus-bar (mm)		主要尺寸 Dimensions (mm)		
	管母线规格	引下线规格	Ø	Ø1	L
MG-70/MR()/200B	70/64	导线型号 用户自选	70	根据所选 引下线型 号确定	200
MG-80/MR()/200B	80/72		80		200
MG-90/MR()/200B	90/80		90		200
MG-100/MR()/200B	100/90		100		200
MG-110/MR()/200B	110/100		110		200
MG-120/MR()/200B	120/110		120		200
MG-130/MR()/200B	130/116		130		200
MG-150/MR()/200B	150/136		150		200
MG-170/MR()/200B	170/156		170		200
MG-200/MR()/200B	200/180		200		200
MG-250/MR()/200B	250/230	As users' choice	250	According to conductor	200
MG-70/MR()/400B	70/64		70		400
MG-80/MR()/400B	80/72		80		400
MG-90/MR()/400B	90/80		90		400
MG-100/MR()/400B	100/90		100		400
MG-110/MR()/400B	110/100		110		400
MG-120/MR()/400B	120/110		120		400
MG-130/MR()/400B	130/116		130		400
MG-150/MR()/400B	150/136		150		400
MG-170/MR()/400B	170/156		170		400
MG-200/MR()/400B	200/180		200		400
MG-250/MR()/400B	250/230		250		400

管母线封端盖 (MGF型)


End-caps for Tubular Bus-bar (Type MGF)

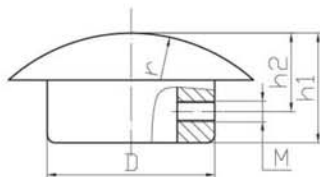

型号 Catalog NO.	适用母线 Suitable Bus-bar (mm)	主要尺寸 Dimensions (mm)					重量 Weight (Kg)
		D	M	r	h1	h2	
MGF-70	70/64	64	8	70	42	30	0.2
MGF-80	80/72	72	8	70	50	35	0.3
MGF-90	90/80	80	8	80	55	35	0.4
MGF-100	100/90	90	8	90	60	40	0.5
MGF-110	110/100	99	10	100	60	30	0.6
MGF-120	120/110	110	10	120	65	40	0.6
MGF-130	130/116	116	10	120	65	40	0.7
MGF-150	150/136	136	10	150	70	40	1.0
MGF-170	170/156	156	10	160	80	50	1.2
MGF-200	200/180	180	12	170	85	55	2.3
MGF-250	250/230	230	12	180	85	60	2.7

管母线封端球 (MGZ型)


End-balls for Tubular Bus-bar (Type MGZ)

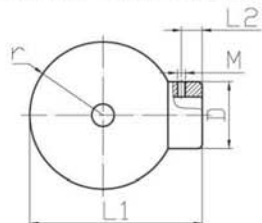

型号 Catalog NO.	适用母线 Suitable Bus-bar (mm)	主要尺寸 Dimensions (mm)					重量 Weight (Kg)
		D	M	r	L1	L2	
MGZ-70	70/64	64	8	70	165	20	1.2
MGZ-80	80/72	72	8	70	165	20	1.2
MGZ-90	90/80	80	8	80	184	20	1.5
MGZ-100	100/90	90	8	90	195	25	2.0
MGZ-110	110/100	99	10	100	215	25	
MGZ-120	120/110	110	10	120	220	25	3.5
MGZ-130	130/116	116	10	120	220	25	4.0
MGZ-150	150/136	136	10	150	340	25	5.0
MGZ-170	170/156	156	10	160	380	30	10
MGZ-200	200/180	180	12	170	415	40	24
MGZ-250	250/230	230	12	180	515	40	35

带阻尼管母线封端盖 (MGF1型)


End-caps for Tubular Bus-bar (Type MGF1)

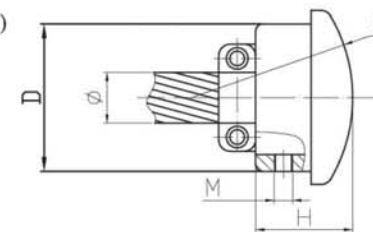

型号 Catalog NO.	适用母线 Suitable Bus-bar (mm)	阻尼导线型号 Damping Conductor	主要尺寸 Dimensions (mm)					重量 Weight (Kg)
			D	M	r	H	Ø	
MGF1-70	70/64	LJG-240	64	8	70	42	22	0.7
MGF1-80	80/72		72	8	70	50	22	0.7
MGF1-90	90/80	LJG-300	80	8	80	60	25	0.8
MGF1-100	100/90		90	8	90	60	25	1.1
MGF1-110	110/100	LJG-500	100	10	100	60	31	1.2
MGF1-120	120/110		110	10	120	65	31	1.2
MGF1-130	130/116		116	10	120	65	31	1.3
MGF1-150	150/136	LJG-630	136	10	150	70	35	1.6
MGF1-170	170/156		156	10	160	80	35	2.1
MGF1-200	200/180		179	12	170	85	35	2.7
MGF1-250	250/230		229	12	180	85	35	3.3

带阻尼管母线封端球 (MGZ1型)


End-balls for Tubular Bus-bar (Type MGZ1)

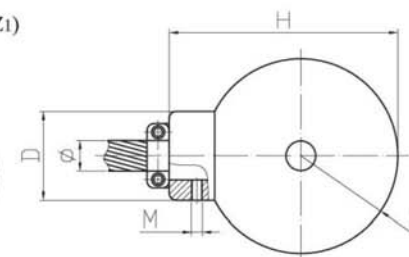

型号 Catalog NO.	适用母线 Suitable Bus-bar (mm)	阻尼导线型号 Damping Conductor	主要尺寸 Dimensions (mm)					重量 Weight (Kg)
			D	M	r	H	Ø	
MGZ1-70	70/64	LJG-240	64	8	70	165	22	1.5
MGZ1-80	80/72		72	8	70	165	22	1.5
MGZ1-90	90/80	LJG-300	80	8	80	—	25	1.7
MGZ1-100	100/90		90	8	90	195	25	2.2
MGZ1-110	110/100	LJG-500	99	10	100	215	31	3.2
MGZ1-120	120/110		110	10	120	220	31	3.8
MGZ1-130	130/116		116	10	120	220	31	4.5
MGZ1-150	150/136	LJG-630	136	10	150	340	35	5.5
MGZ1-170	170/156		156	10	160	380	35	10.8
MGZ1-200	200/180		180	12	170	415	35	25
MGZ1-250	250/230		230	12	180	515	35	36

管母线外接头 (MJ (W) 型)


Tubular Bus-bar Joints (Type MJ/W, Outside)

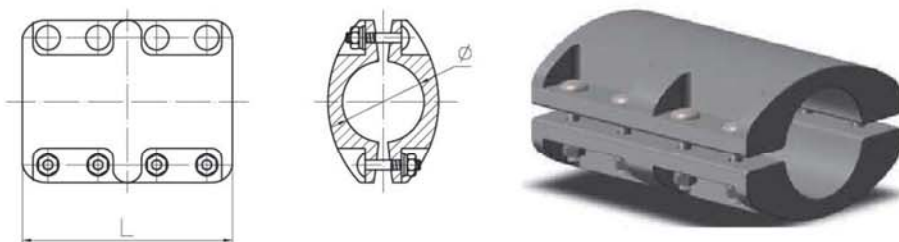

型号 Catalog NO.	适用母线 Suitable Bus-bar (mm)	主要尺寸 Dimensions (mm)		重量 Weight (Kg)
		Ø	L	
MJ-70W	70/64	70	180	5.0
MJ-90W	90/80	90	210	8.7
MJ-100W	100/90	100	235	10.7
MJ-110W	110/100	110	250	10.7
MJ-120W	120/110	120	260	12.7
MJ-130W	130/116	130	280	14.0
MJ-150W	150/136	150	320	18.0


管母线内接头 (MJ 型)

Tubular Bus-bar Joints (Type MJ, Inside)

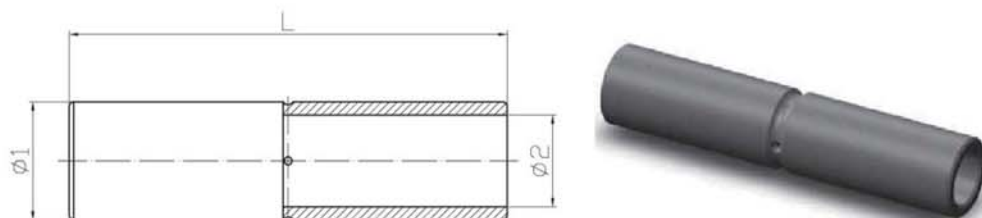


型号 Catalog NO.	适用母线 Suitable Bus-bar (mm)	主要尺寸 Dimensions (mm)			重量 Weight (Kg)
		Ø ₁	Ø ₂	L	
MJ-70	70/64	63	42	300	1.4
MJ-80	80/72	71	52	300	1.6
MJ-100	100/90	79	58	300	2.8
MJ-110	110/100	99	71	380	4.1
MJ-120	120/110	109	79	430	5.6
MJ-130	130/116	114	80	480	6.3
MJ-150	150/136	134	104	500	7.5
MJ-170	170/156	154	108	500	11.0

支撑式管母线单伸缩设备线夹 (MSZ型平放式)

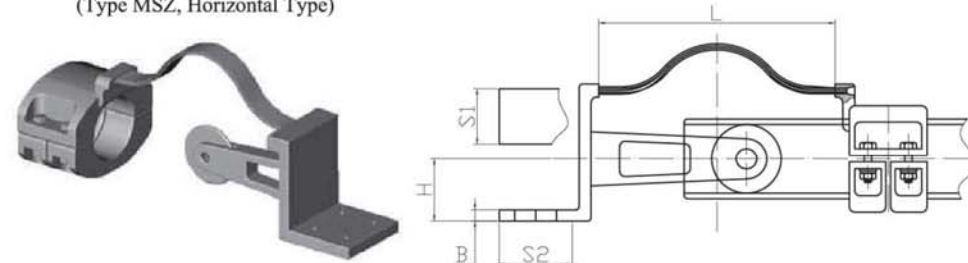Support Type Single Flexible Terminal Connectors for Tubular Bus-bar
(Type MSZ, Horizontal Type)

型号 Catalog NO.	适用母线 Suitable Bus-bar (mm)	主要尺寸 Dimensions (mm)					重量 Weight (Kg)
		L	S ₁	S ₂	B	H	
MGS-90L (MSZ-90)	90/80	340	80	105	16	90	7.5
MGS-100L (MSZ-100)	100/90	340	125	135	18	100	9.2
MGS-100AL (MSZ-100A)	100/90	520	100	105	18	100	10.0
MGS-110L (MSZ-110)	110/100	360	125	130	20	110	11.0
MGS-120L (MSZ-120)	120/110	360	130	150	20	120	11.5
MGS-130L (MSZ-130)	130/116	360	150	150	20	130	13.0
MGS-150L (MSZ-150)	150/136	380	150	150	22	150	15.5


支撑式管母线单伸缩设备线夹 (MSZ型斜放式)

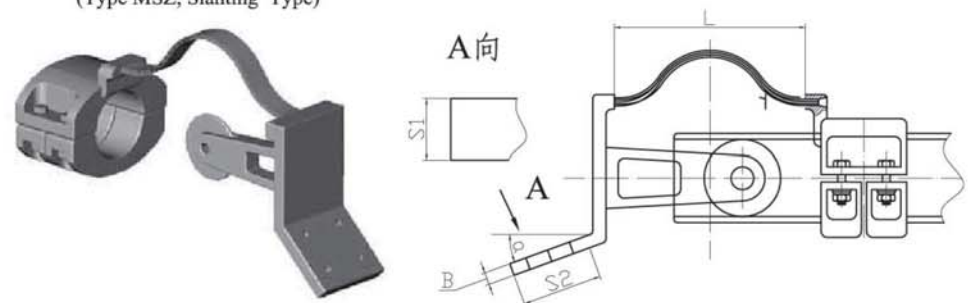Support Type Single Flexible Terminal Connectors for Tubular Bus-bar
(Type MSZ, Slanting Type)


型号 Catalog NO.	适用母线 Suitable Bus-bar (mm)	主要尺寸 Dimensions (mm)					重量 Weight (Kg)
		L	S ₁	S ₂	B	α	
MGZ-80D	80/72	250	80	105	18	根据 安装 要求	7.5
MGZ-90D	90/80	250	100	115	18		8.0
MGZ-100D	100/90	340	126	126	22		13.5
MGZ-110D	110/100	360	130	150	22		14.0
MGZ-120D	120/110	360	130	150	22		15.0
MGZ-130D	130/116	360	150	165	22		16.5
MGZ-150D	150/136	360	150	165	22		17.5

支撑式双伸缩设备线夹 (MSY型)

Support Type Double Flexible Terminal Connectors (Type MSY)

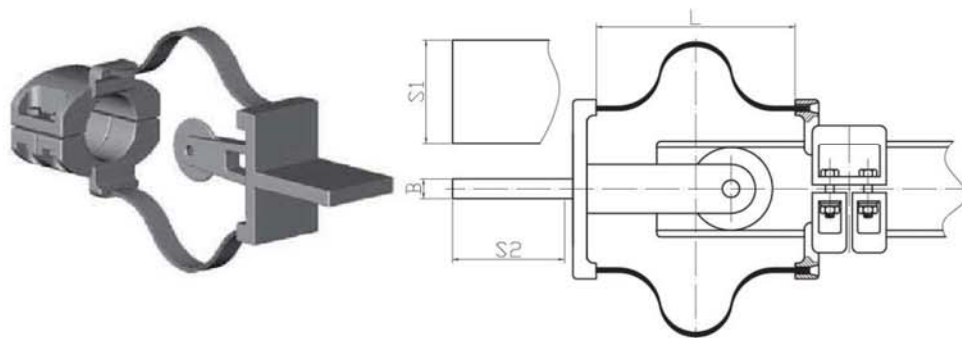


型号 Catalog NO.	适用母线 Suitable Bus-bar (mm)	主要尺寸 Dimensions (mm)				重量 Weight (Kg)
		L	S ₁	S ₂	B	
MSY-120	120/110	240	125	130	24	
MSY-130	130/116	240	150	160	24	
MSY-150	150/136	260	150	160	25	

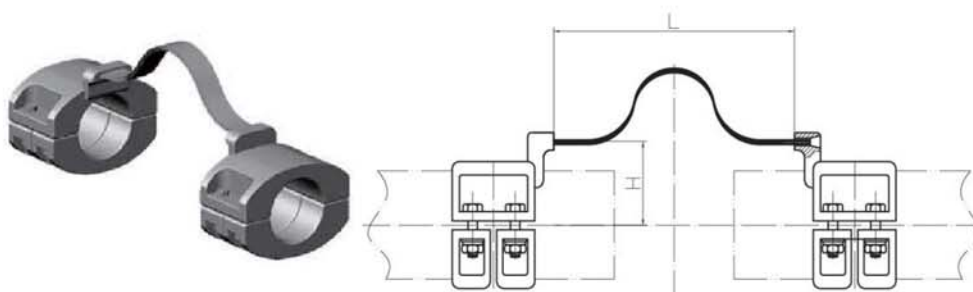单伸缩引流线夹 (MGS₁型)Single Flexible Jumper Clamps (Type MGS₁)

型号 Catalog NO.	适用母线 Suitable Bus-bar (mm)	主要尺寸 Dimensions (mm)		重量 Weight (Kg)
		L	H	
MGS ₁ -80	80/72	260	90	
MGS ₁ -90	90/80	260	90	
MGS ₁ -100	100/90	260	120	
MGS ₁ -120	120/110	280	120	
MGS ₁ -130	130/116	300	120	
MGS ₁ -150	150/136	320	150	
MGS ₁ -170	170/156	350	150	
MGS ₁ -250	250/230	450	180	

管母线伸缩线夹 (MGS型B类)


Flexible Clamps for Tubular Bus-bar (Type MGS, Group B)

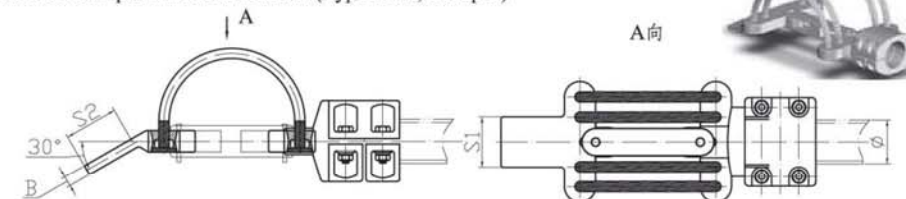

型号 Catalog NO.	适用母线 Suitable Bus-bar (mm)	主要尺寸 Dimensions (mm)				重量 Weight (Kg)
		Ø	S ₁	S ₂	B	
MGS-70B	70	70	80	85	16	8.0
MGS-80B	80	80	80	85	16	9.0
MGS-90B	90	90	100	105	18	10.0
MGS-100B	100	100	100	105	18	10.5
MGS-110B	110	110	100	105	18	11.5
MGS-120B	120	120	100	105	18	14.5
MGS-130B	130	130	125	130	20	15.0
MGS-150B	150	150	125	130	20	18.0
MGS-170B	170	170	125	130	20	24.0
MGS-200B	200	200	150	160	25	35.0
MGS-250B	250	250	150	160	25	39.0


管母线伸缩线夹 (MGS型C类)

Flexible Clamps for Tubular Bus-bar (Type MGS, Group C)

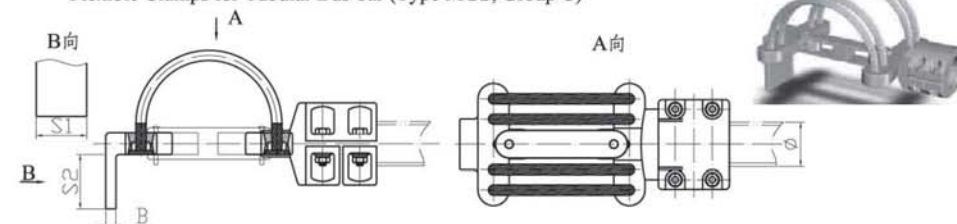


型号 Catalog NO.	适用母线 Suitable Bus-bar (mm)	主要尺寸 Dimensions (mm)				重量 Weight (Kg)
		Ø	S ₁	S ₂	B	
MGS-70C	70	70	80	85	16	8.0
MGS-80C	80	80	80	85	16	9.0
MGS-90C	90	90	100	105	18	10.0
MGS-100C	100	100	100	105	18	10.5
MGS-110C	110	110	100	105	18	11.5
MGS-120C	120	120	100	105	18	14.5
MGS-130C	130	130	125	130	20	15.0
MGS-150C	150	150	125	130	20	18.0
MGS-170C	170	170	125	130	20	24.0
MGS-200C	200	200	150	160	25	35.0
MGS-250C	250	250	150	160	25	39.0

管母线伸缩金具 (MGSD (L) 型)
Tubular Bus-bar Flexible Fittings (Type MGSD/L)

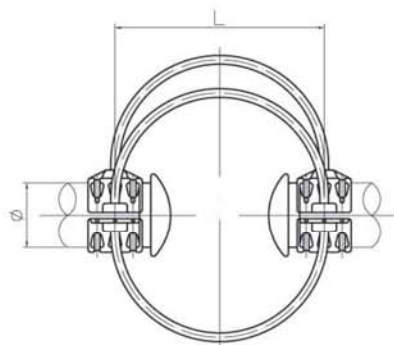

型号 Catalog NO.	适用母线 Suitable Bus-bar (mm)	主要尺寸 Dimensions (mm)		重量 Weight (Kg)
		Ø	L	
MGSD-150L	150	150	480	
MGSD-170L	170	170	500	
MGSD-200L	200	200	520	
MGSD-250L	250	250	520	

支撑式管母线伸缩金具 (MGSZ型)
Support Type Tubular Bus-bar Flexible Fittings (Type MGSZ)

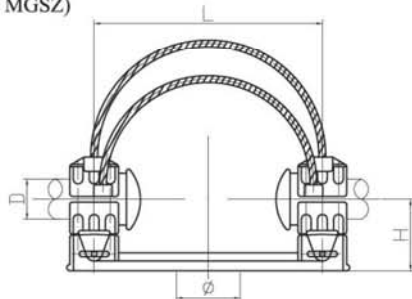

型号 Catalog NO.	适用母线 Suitable Bus-bar (mm)	适用支柱绝缘子法兰盘 尺寸Ø Diameter of Insulator	主要尺寸 Dimensions (mm)			重量 Weight (Kg)
			D	L	H	
MGSZ-70	70		70	400	125	
MGSZ-80	80		80	400	130	
MGSZ-90	90		90	420	130	
MGSZ-100	100		100	420	135	
MGSZ-120	120		120	460	145	
MGSZ-130	130		130	460	155	
MGSZ-150	150		150	480	160	
MGSZ-170	170		170	500	180	
MGSZ-200	200		200	520	210	
MGSZ-250	250		250	520	248	



TRIGOLD

TRIGOLD POWER CO.,LTD.

上海鑫之机电